

Standard Duty Support Grips

Universal Eye, Single Weave, Tin-Coated Bronze



Universal Eye, Closed Mesh*

For permanent support when cable end is available to be installed through grip.

Cable Diameter Range Inches (cm)	Approx. Breaking Strength Lbs. (N)	E Inches (cm)	M Inches (cm)	Catalog Number
.50"-.62" (1.27-1.57)	530 (2,357)	18" (45.72)	10" (25.40)	02201051
.63"-.74" (1.60-1.88)	790 (3,514)	18" (45.72)	10" (25.40)	02201052
.75"-.99" (1.90-2.51)	1,020 (4,537)	18" (45.72)	13" (33.02)	02201053
1.00"-1.24" (2.54-3.15)	1,610 (7,161)	18" (45.72)	14" (35.56)	02201050
1.25"-1.49" (3.17-3.78)	1,610 (7,161)	18" (45.72)	15" (38.10)	02201054
1.50"-1.74" (3.81-4.42)	1,610 (7,161)	18" (45.72)	17" (43.18)	02201055
1.75"-1.99" (4.44-5.05)	2,150 (9,563)	18" (45.72)	19" (48.26)	02201056
2.00"-2.49" (5.08-6.32)	3,260 (14,500)	18" (45.72)	21" (53.34)	02201057
2.50"-2.99" (6.35-7.59)	3,260 (14,500)	18" (45.72)	23" (58.42)	02201058


WARNING!

It is important that you read all breaking strength, safety and technical data relating to this product on pages T-42 through T-46.


Universal Eye, Split Mesh, Lace Closing

For permanent support when cable end is not available.

Cable Diameter Range Inches (cm)	Approx. Breaking Strength Lbs. (N)	E Inches (cm)	M Inches (cm)	Catalog Number
.50"-.62" (1.27-1.57)	530 (2,357)	18" (45.72)	10" (25.40)	02202050
.63"-.74" (1.60-1.88)	790 (3,514)	18" (45.72)	10" (25.40)	02202051
.75"-.99" (1.90-2.51)	1,020 (4,537)	18" (45.72)	13" (33.02)	02202052
1.00"-1.24" (2.54-3.15)	1,610 (7,161)	18" (45.72)	14" (35.56)	02202054
1.25"-1.49" (3.17-3.78)	1,610 (7,161)	18" (45.72)	15" (38.10)	02202055
1.50"-1.74" (3.81-4.42)	1,610 (7,161)	18" (45.72)	17" (43.18)	02202056
1.75"-1.99" (4.44-5.05)	2,150 (9,563)	18" (45.72)	19" (48.26)	02202057
2.00"-2.49" (5.08-6.32)	3,260 (14,500)	18" (45.72)	21" (53.34)	02202058
2.50"-2.99" (6.35-7.59)	3,260 (14,500)	18" (45.72)	23" (58.42)	02202059
3.50"-3.99" (8.89-10.13)	4,900 (21,795)	18" (45.72)	27" (68.58)	02202061

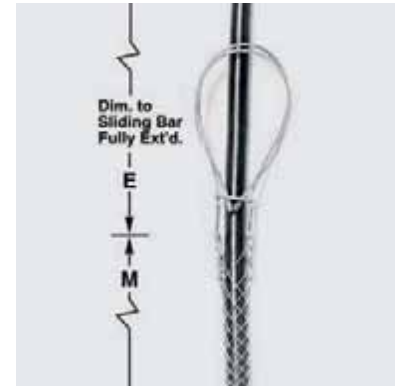

Universal Eye, Closed Mesh

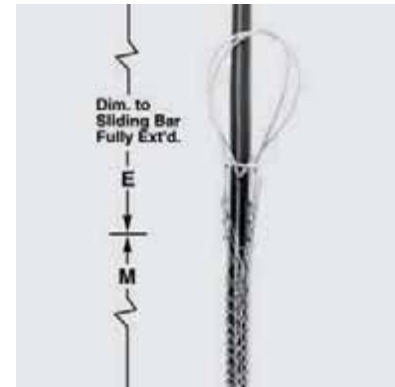

Universal Eye, Split Mesh, Lace Closing

Universal Eye, Split Mesh, Rod Closing*

For support when cable end is not available.

Cable Diameter Range Inches (cm)	Approx. Breaking Strength Lbs. (N)	E Inches (cm)	M Inches (cm)	Catalog Number
.50"-.62" (1.27-1.57)	790 (3,514)	18" (45.72)	8.5" (21.59)	02203064
.63"-.74" (1.60-1.88)	790 (3,514)	18" (45.72)	8.5" (21.59)	02203065
.75"-.99" (1.90-2.51)	1,020 (4,537)	18" (45.72)	10.5" (26.67)	02203066
1.00"-1.24" (2.54-3.15)	1,610 (7,161)	18" (45.72)	12.5" (31.75)	02203068
1.25"-1.49" (3.17-3.78)	1,610 (7,161)	18" (45.72)	14.5" (36.83)	02203069
1.50"-1.74" (3.81-4.42)	1,610 (7,161)	18" (45.72)	15.5" (39.37)	02203070
1.75"-1.99" (4.44-5.05)	2,150 (9,563)	18" (45.72)	16.5" (41.91)	02203071
2.00"-2.49" (5.08-6.32)	3,260 (14,500)	18" (45.72)	19.5" (49.53)	02203072
2.50"-2.99" (6.35-7.59)	3,260 (14,500)	18" (45.72)	21.5" (54.61)	02203073
3.00"-3.49" (7.62-8.86)	5,750 (25,576)	18" (45.72)	23.5" (59.69)	02203074



Universal Eye, Split Mesh, Rod Closing

Note: E-Eye length.

M-Mesh length at nominal diameter.

* Change catalog number from 022 to 024 for stainless steel. Consult factory for availability.