



Kellems® Wire Management Products

Service Drop Grips

Single Eye, Tin-Coated Bronze

WARNING!

It is important that you read all breaking strength, safety and technical data relating to this product on pages T-42 through T-46.



Light Duty, Single Eye, Closed Mesh, Single Weave



Heavy Duty, Single Eye, Closed Mesh, Multi-Weave

Light Duty, Single Eye, Closed Mesh, Single Weave

For permanent support when cable end is available to be installed.

Cable Diameter Range Inches (cm)	Approx. Breaking Strength Lbs. (N)	E Inches (cm)	M Inches (cm)	Catalog Number
.23"-.31" (.58-.79)	290 (1,290)	3" (7.62)	3.75" (9.52)	02216001
.29"-.37" (.74-.94)	290 (1,290)	5" (12.70)	4.25" (10.79)	02216002
.35"-.44" (.89-1.12)	500 (2,224)	5.5" (13.97)	4.75" (12.06)	02216003
.41"-.50" (1.04-1.27)	500 (2,224)	5.5" (13.97)	5" (12.70)	02216004
.46"-.56" (1.17-1.42)	660 (2,936)	6" (15.24)	5.25" (13.33)	02216005
.52"-.62" (1.32-1.57)	790 (3,514)	7" (17.78)	6.25" (15.87)	02216006
.58"-.68" (1.47-1.73)	790 (3,514)	7" (17.78)	6½" (16.51)	02216007
.64"-.75" (1.63-1.90)	790 (3,514)	7" (17.78)	6.75" (17.14)	02216008
.70"-.81" (1.78-2.06)	790 (3,514)	7" (17.78)	7.25" (18.41)	02216009
.75"-.87" (1.90-2.21)	1,020 (4,537)	8" (20.32)	8" (20.32)	02216010
.81"-.94" (2.06-2.39)	1,020 (4,537)	8" (20.32)	8.25" (20.95)	02216011
.87"-1.00" (2.21-2.54)	1,020 (4,537)	8" (20.32)	8.75" (22.22)	02216012
.94"-1.06" (2.39-2.69)	1,020 (4,537)	9" (22.86)	9" (22.86)	02216013
1.00"-1.18" (2.54-3.00)	1,020 (4,537)	9" (22.86)	9.5" (24.13)	02216014
1.06"-1.25" (2.69-3.17)	1,020 (4,537)	9" (22.86)	9.5" (24.13)	02216015


Heavy Duty, Single Eye, Closed Mesh, Multi-Weave

For permanent support when cable end is available to be installed.

Cable Diameter Range Inches (cm)	Approx. Breaking Strength Lbs. (N)	E Inches (cm)	M Inches (cm)	Catalog Number
.23"-.31" (.58-.79)	500 (2,224)	5" (12.70)	4.5" (11.43)	02217001
.29"-.37" (.74-.94)	500 (2,224)	5" (12.70)	5.5" (13.97)	02217002
.35"-.44" (.89-1.12)	870 (3,870)	6" (15.24)	6.5" (16.51)	02217003
.41"-.50" (1.04-1.27)	870 (3,870)	6" (15.24)	7.5" (19.05)	02217004
.46"-.56" (1.17-1.42)	1,050 (4,670)	6" (15.24)	8" (20.32)	02217005
.52"-.62" (1.32-1.57)	1,050 (4,670)	7" (17.78)	8.5" (21.59)	02217006
.58"-.68" (1.47-1.73)	1,050 (4,670)	7" (17.78)	9.5" (24.13)	02217007
.64"-.75" (1.63-1.90)	1,390 (6,183)	7" (17.78)	9.5" (24.13)	02217008
.70"-.81" (1.78-2.06)	1,390 (6,183)	8" (20.32)	10.5" (26.67)	02217009
.75"-.87" (1.90-2.21)	1,390 (6,183)	8" (20.32)	10.5" (26.67)	02217010
.81"-.94" (2.06-2.39)	1,390 (6,183)	8" (20.32)	10.5" (26.67)	02217011
.87"-1.00" (2.21-2.54)	1,790 (7,962)	8" (20.32)	11.5" (29.21)	02217012
.94"-1.06" (2.39-2.69)	1,790 (7,962)	9" (22.86)	12.5" (31.75)	02217013
1.00"-1.18" (2.54-3.00)	1,790 (7,962)	9" (22.86)	13.5" (34.29)	02217014
1.06"-1.25" (2.69-3.17)	1,790 (7,962)	9" (22.86)	14.5" (36.83)	02217015

Note: E-Eye length.

M-Mesh length at nominal diameter.

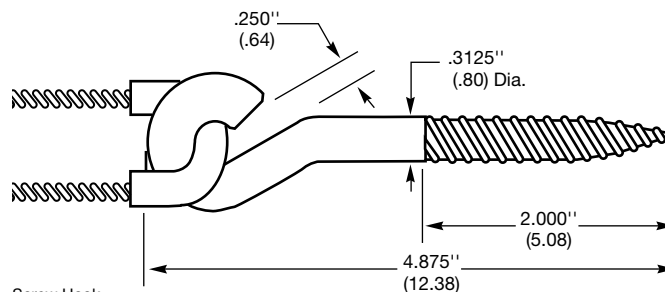

Screw Hook
Catalog Number 20303001
Yield Strength 900 lbs (4003 N)