


SAK Series
AST 1 6.3/2.8 KRG

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Product image

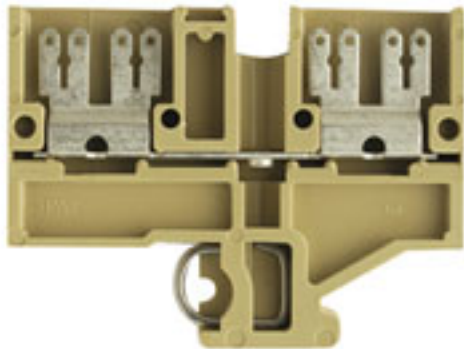

Similar to illustration

Klippon® Connect with clamping yoke Technology

The high reliability and variety of designs of the terminal blocks with clamping yoke connections make planning easier and optimises operational safety. Klippon® Connect provides a proven response to a range of different requirements.

General ordering data

Delivery status	This article will no longer be available in the future.
Available until	2020-12-31
Type	AST 1 6.3/2.8 KRG
Order No.	0478220000
Version	SAK Series, Feed-through terminal, Rated cross-section: 2.5 mm ² , Flat-blade connection, Direct mounting
GTIN (EAN)	4008190140625
Qty.	50 pc(s).
Alternative product	0699600000

Data sheet

SAK Series AST 1 6.3/2.8 KRG

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Technical data

Dimensions and weights

Width	6.5 mm	Width (inches)	0.256 inch
Height	58 mm	Height (inches)	2.283 inch
Depth	46 mm	Depth (inches)	1.811 inch
Weight	14.76 g	Net weight	14.04 g

Temperatures

Storage temperature, max.	40 °C	Storage temperature, min.	10 °C
Storage temperature	10 °C...40 °C	Continuous operating temp., min.	-60 °C
Continuous operating temp., max.	130 °C		

Material data

Material	KrG	Colour	medium yellow
UL 94 flammability rating	V-0, 5VA		

System specifications

Version	with cable-lug connection, for screwable cross-connection, One end without connector	End cover plate required	Yes
Number of potentials	1	Number of levels	1
Number of clamping points per level	4	Number of potentials per tier	1
Levels cross-connected internally	No	PE connection	No
Rail	TS 32	N-function	No
PE function	No	PEN function	No

Additional technical data

Explosion-tested version	No	Installation advice	Direct mounting
Number of similar terminals	1	Open sides	right
Type of mounting	Snap-on		

CSA rating data

Certificate No. (CSA)	12400-142	Current size C (CSA)	16 A
Voltage size C (CSA)	300 V		

Conductors for clamping (rated connection)

Clamping range, max.	2.5 mm ²	Clamping range, min.	0.5 mm ²
Connection direction	top	Number of connections	4
Type of connection	Flat-blade connection	Wire connection cross section, finely stranded, max.	2.5 mm ²
Wire connection cross-section, finely stranded, min.	0.5 mm ²		

Other connections

Cable-lug connection	Slotted	Rated cross-section spade connector 2.8 mm	1 mm ²
Rated cross-section spade connector 6.3 mm	2.5 mm ²		

Data sheet

SAK Series AST 1 6.3/2.8 KRG

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Technical data

Rating data

Rated cross-section	2.5 mm ²	Rated voltage	500 V
Rated current	20 A	Current at maximum wires	20 A
Standards	IEC 61210, In accordance with IEC 60947-7-1	Volume resistance according to IEC 60947-7-x	1.33 mΩ
Power loss in accordance with IEC 60947-7-x	0.77 W	Rated impulse withstand voltage	6 kV
Pollution severity	3		

UL rating data

Certificate No. (UR)	E60693	Current size C (UR)	13 A
Voltage size C (UR)	300 V		

Classifications

ETIM 6.0	EC000897	ETIM 7.0	EC000897
eClass 9.0	27-14-11-20	eClass 9.1	27-14-11-20
eClass 10.0	27-14-11-20	UNSPSC	30-21-18-11

Approvals

Approvals



ROHS Conform

Downloads

Approval/Certificate/Document of Conformity	DE_PT1331_20160418_049_ISSUE01.pdf
Engineering Data	EPLAN_WSCAD
User Documentation	StorageConditionsTerminalBlocks

Safety note

Safety notice	Safety Information
---------------	------------------------------------