

Accessories

| | | |
|--------------------|--|------|
| Accessories | Introduction | J.2 |
| | Wire-end ferrules with plastic collar | J.4 |
| | Twin wire-end ferrules with plastic collar | J.10 |
| | Wire-end ferrules for short-circuit-proof and earth-fault-proof cables | J.13 |
| | Wire-end ferrules with plastic collars, special sizes | J.14 |
| | Wire-end ferrules without plastic collar | J.15 |
| | Assortment of wire-end ferrules | J.16 |
| | Insulated cable connectors, PVC, with conical cable entry | J.18 |

Accessories

Weidmüller stocks a comprehensive range of wire end ferrules and insulated cable lugs for immediate supply.

Wire end ferrules

Wire end ferrules ensure the long-term quality of electrical connections. Another advantage is their usefulness during installation. The wide range of products embraces wire end ferrules with or without plastic collars and twin wire end ferrules in all the colours normally required by users.



Insulated cable lugs

Insulated cable lugs ensure the long-term quality of electrical connections. Most of the products in the range (apart from the butt connectors) have a conical inlet. This guarantees optimum entry of the conductor as the strands are automatically centred.



CSA - US certification

The following wire-end ferrules are CSA-US certified:



- Unconnected wire-end ferrules (bulk-packaged) from 0.14 mm² to 50 mm² (~ AWG 26 - 1)
- Twin wire-end ferrules from 2 x 0.5 mm² to 2 x 16 mm² (~ AWG 20 - 6)
- Special wire-end ferrules for use in small wire chambers and with AWG wires
- Tape-packaged wire-end ferrules on reels, or on belt, from 0.5 mm² to 2.5 mm² (~ AWG 20 - 14)
- Un-insulated wire-end ferrules from 0.14 mm² to 50 mm²

UL certification

The following wire-end ferrules are UL certified:



- Unconnected wire-end ferrules (bulk packaged) from 0.14 mm² to 50 mm² (~ AWG 26 - 1)

Tools

Tools for insulated cable lugs

| Tool | Order No. | 0.5 - 1.5 | Type of contact 1.5 - 2.5 | 4.0 - 6.0 |
|---------|------------|-----------|------------------------------|-----------|
| CTI 6 | 9006120000 | ● | ● | ● |
| CTI 6 G | 9202850000 | ● | ● | ● |
| HTI 15 | 9014400000 | ● | ● | |
| Station | | red | blue | yellow |

Crimping tools for ferrules


| | PZ 1.5 | stripax® plus 2.5 | PZ 3 | PZ 4 | PZ 6 roto | PZ 6/5 | PZ 16 | PZ 50 |
|-------------------------|------------|----------------------|------------|------------|--------------|------------|------------|------------|
| | Order No. | | | | | | | |
| | 9005990000 | 9020000000 | 0567300000 | 9012500000 | 9014350000 | 9011460000 | 9012600000 | 9006450000 |
| Ferrule mm ² | | | | | | | | |
| H 0.14 | ● | | | | ● | | | |
| H 0.25 | ● | | | | ● | ● | | |
| H 0.34 | ● | | | | ● | ● | | |
| H 0.5 | ● | ● ¹ | ● | ● | ● | ● | | |
| H 0.75 | ● | ● ¹ | ● | ● | ● | ● | | |
| H 1.0 | ● | ● ¹ | ● | ● | ● | ● | | |
| H 1.5 | ● | ● ¹ | ● | ● | ● | ● | | |
| H 2.5 | | ● ¹ | ● | ● | ● | ● | | |
| H 4.0 | | | ● | ● | ● | ● | | |
| H 6.0 | | | ● | | ● | ● | ● | |
| H 10.0 | | | | | | | ● | |
| H 16.0 | | | | | | | ● | |
| H 25.0 | | | | | | | | ● |
| H 35.0 | | | | | | | | ● |
| H 50.0 | | | | | | | | ● |

●¹ = ferrules in strip form only

Twin wire end ferrules are to be crimped according to the following table:

| Tool | Order No. | H 0.5 | H 0.75 | H 1.0 | H 1.5 | Ferrules H 2.5 | H 4.0 | H 6.0 | H 10.0 | H 16.0 |
|-----------|------------|---------------------|---------------------|---------------------|---------------------|-------------------|-------------------|-------|--------|--------|
| PZ 1.5 | 9005990000 | ● | ● | | | | | | | |
| PZ 3 | 0567300000 | ● | ● | ● | ● | ● | | | | |
| PZ 4 | 9012500000 | ● | ● | ● | ● | ● | | | | |
| PZ 6 roto | 9014350000 | ● | ● | ● | ● | ● | ● | | | |
| PZ 6/5 | 9011460000 | | ● | ● | ● | ● | ● | | | |
| Station | | 1.5 mm ² | 1.5 mm ² | 2.5 mm ² | 2.5 mm ² | 4 mm ² | 6 mm ² | | | |
| PZ ZH 16 | 9013600000 | | | | | | | ● | ● | ● |

Wire-end ferrules with plastic collars



- Polypropylene conical entry funnel
- Heat-resistant up to 105°C
- The entry funnel can also be manufactured from a non-flammable material on request

For conductors from 0.14-150 mm² (AWG 26-300MCM)

Material E-Cu, electro-galvanised

Dimensional tolerance acc. to DIN 46228 Part 4

Weidmüller colour code

Packed loose




| Type | Ø mm ² | AWG | L1 | L2 | D1 | D2 | S1 | S2 | Stripping length | Colour | Qty. | Order No. |
|--------------|-------------------|-------------|-------|----|------|------|------|------|------------------|------------|------|------------|
| H0,25/10 HBL | 0.25 | AWG 24 | 10.00 | 6 | 0.8 | 1.8 | 0.15 | 0.25 | 8 | Light Blue | 500 | 9025740000 |
| H0,25/12 HBL | 0.25 | AWG 24 | 12.00 | 8 | 0.8 | 1.8 | 0.15 | 0.25 | 10 | Light Blue | 500 | 9025760000 |
| H0,34/10 TK | 0.34 | AWG 22 | 10.00 | 6 | 0.8 | 2 | 0.15 | 0.25 | 8 | Turquoise | 500 | 9025750000 |
| H0,34/12 TK | 0.34 | AWG 22 | 12.00 | 8 | 0.8 | 2 | 0.15 | 0.25 | 10 | Turquoise | 500 | 9025770000 |
| H0,5/12 OR | 0.5 | AWG 20 | 12.00 | 6 | 1 | 2.6 | 0.15 | 0.25 | 8 | Orange | 500 | 0409500000 |
| H0,5/14 OR | 0.5 | AWG 20 | 14.00 | 8 | 1 | 2.6 | 0.15 | 0.25 | 10 | Orange | 500 | 0690700000 |
| H0,5/16 OR | 0.5 | AWG 20 | 16.00 | 10 | 1 | 2.6 | 0.15 | 0.25 | 12 | Orange | 500 | 9025870000 |
| H0,5/18 OR | 0.5 | AWG 20 | 18.00 | 12 | 1 | 2.6 | 0.15 | 0.25 | 14 | Orange | 500 | 1076980000 |
| H0,75/12 W | 0.75 | AWG 18 | 12.00 | 6 | 1.2 | 2.8 | 0.15 | 0.25 | 8 | White | 500 | 0409600000 |
| H0,75/14 W | 0.75 | AWG 18 | 14.00 | 8 | 1.2 | 2.8 | 0.15 | 0.25 | 10 | White | 500 | 0462900000 |
| H0,75/16 W | 0.75 | AWG 18 | 16.00 | 10 | 1.2 | 2.8 | 0.15 | 0.25 | 12 | White | 500 | 9025860000 |
| H0,75/18 W | 0.75 | AWG 18 | 18.00 | 12 | 1.2 | 2.8 | 0.15 | 0.25 | 14 | White | 500 | 9019100000 |
| H1,0/12 GE | 1 | AWG 17 | 12.00 | 6 | 1.4 | 3 | 0.15 | 0.25 | 8 | Yellow | 500 | 0409700000 |
| H1,0/14 GE | 1 | AWG 17 | 14.00 | 8 | 1.4 | 3 | 0.15 | 0.25 | 10 | Yellow | 500 | 0463000000 |
| H1,0/16 GE | 1 | AWG 17 | 16.00 | 10 | 1.4 | 3 | 0.15 | 0.25 | 12 | Yellow | 500 | 9025950000 |
| H1,0/18 GE | 1 | AWG 17 | 18.00 | 12 | 1.4 | 3 | 0.15 | 0.25 | 15 | Yellow | 500 | 9025930000 |
| H1,5/14 R | 1.5 | AWG 16 | 14.00 | 8 | 1.7 | 3.5 | 0.15 | 0.25 | 10 | Red | 500 | 0463100000 |
| H2,5/15D BL | 2.5 | AWG 14 | 15.00 | 8 | 2.2 | 4.2 | 0.15 | 0.25 | 10 | Blue | 500 | 9019160000 |
| H1,5/16 R | 1.5 | AWG 16 | 16.00 | 10 | 1.7 | 3.5 | 0.15 | 0.25 | 12 | Red | 500 | 0635100000 |
| H2,5/19D BL | 2.5 | AWG 14 | 19.00 | 12 | 2.2 | 4.2 | 0.15 | 0.25 | 14 | Blue | 500 | 9019170000 |
| H1,5/24 R | 1.5 | AWG 16 | 24.00 | 18 | 1.7 | 3.5 | 0.15 | 0.25 | 20 | Red | 500 | 0565600000 |
| H2,5/25D BL | 2.5 | AWG 14 | 25.00 | 18 | 2.2 | 4.2 | 0.15 | 0.25 | 20 | Blue | 500 | 9019180000 |
| H4,0/18D GR | 4 | AWG 12 | 18.00 | 10 | 2.8 | 4.8 | 0.2 | 0.3 | 12 | Grey | 500 | 9019190000 |
| H4,0/20D GR | 4 | AWG 12 | 20.00 | 12 | 2.8 | 4.8 | 0.2 | 0.3 | 14 | Grey | 500 | 9019200000 |
| H4,0/26D GR | 4 | AWG 12 | 26.00 | 18 | 2.8 | 4.8 | 0.2 | 0.3 | 20 | Grey | 100 | 9019210000 |
| H6,0/20 SW | 6 | AWG 10 | 20.00 | 12 | 3.5 | 6.3 | 0.2 | 0.3 | 14 | Black | 100 | 0533500000 |
| H6,0/26 SW | 6 | AWG 10 | 26.00 | 18 | 3.5 | 6.3 | 0.2 | 0.3 | 20 | Black | 100 | 0565700000 |
| H10,0/22 EB | 10 | AWG 7 | 22.00 | 12 | 4.5 | 7.6 | 0.2 | 0.4 | 15 | Ivory | 100 | 0534200000 |
| H10,0/28 EB | 10 | AWG 7 | 28.00 | 18 | 4.5 | 7.6 | 0.2 | 0.4 | 21 | Ivory | 100 | 0565800000 |
| H16,0/22 GN | 16 | AWG 6 | 22.00 | 12 | 5.8 | 8.8 | 0.2 | 0.4 | 15 | Green | 100 | 0565900000 |
| H16,0/28 GN | 16 | AWG 6 | 28.00 | 18 | 5.8 | 8.8 | 0.2 | 0.4 | 21 | Green | 100 | 0566000000 |
| H25,0/30 BR | 25 | AWG 3 | 30.00 | 16 | 7.3 | 11.2 | 0.2 | 0.4 | 18 | Brown | 50 | 0317000000 |
| H25,0/36 BR | 25 | AWG 3 | 36.00 | 22 | 7.3 | 11.2 | 0.2 | 0.4 | 24 | Brown | 50 | 0317100000 |
| H35,0/30 BE | 35 | AWG 2 | 30.00 | 16 | 8.3 | 12.7 | 0.2 | 0.4 | 19 | Beige | 50 | 0317200000 |
| H35,0/39 BE | 35 | AWG 2 | 39.00 | 25 | 8.3 | 12.7 | 0.2 | 0.4 | 28 | Beige | 50 | 0317300000 |
| H50/36 OLV | 50 | AWG 1 | 36.00 | 20 | 10.3 | 15 | 0.3 | 0.5 | 26 | Olive | 50 | 0444200000 |
| H70,0/37 GE | 70 | AWG 2/0 | 37.00 | 21 | 12.7 | 16 | 0.35 | 0.6 | 26 | Yellow | 25 | 9028200000 |
| H95,0/44 R | 95 | AWG 3/0 | 44.00 | 25 | 14.7 | 18 | 0.35 | 0.6 | 31 | Red | 25 | 9028210000 |
| H120,0/50 BL | 120 | AWG 4/0 | 50.00 | 30 | 16.5 | 21 | 0.5 | 0.7 | 36 | Blue | 25 | 9028220000 |
| H150,0/54 GE | 150 | AWG 300 MCM | 54.00 | 32 | 18.5 | 23.5 | 0.5 | 0.75 | 38 | Yellow | 25 | 9028230000 |

Weidmüller colour code

In multi-pack bag



| Type | Ø mm ² | AWG | L1 | L2 | D1 | D2 | S1 | S2 | Stripping length | Colour | Qty. | Order No. |
|-------------|-------------------|--------|-------|----|-----|-----|------|------|------------------|------------|------|------------|
| H0,14/10 GR | 0.14 | AWG 26 | 10.00 | 6 | 0.6 | 1.5 | 0.15 | 0.25 | 8 | Grey | 500 | 9005180000 |
| H0,14/12 GR | 0.14 | AWG 26 | 12.00 | 8 | 0.6 | 1.5 | 0.15 | 0.25 | 10 | Grey | 500 | 9028240000 |
| H0,25/10 HB | 0.25 | AWG 24 | 10.00 | 6 | 0.8 | 1.8 | 0.15 | 0.25 | 8 | Light Blue | 500 | 9026050000 |
| H0,25/12 HB | 0.25 | AWG 24 | 12.00 | 8 | 0.8 | 1.8 | 0.15 | 0.25 | 10 | Light Blue | 500 | 9025780000 |
| H0,34/10 TK | 0.34 | AWG 22 | 10.00 | 6 | 0.8 | 2 | 0.15 | 0.25 | 8 | Turquoise | 500 | 9026030000 |
| H0,34/12 TK | 0.34 | AWG 22 | 12.00 | 8 | 0.8 | 2 | 0.15 | 0.25 | 10 | Turquoise | 500 | 9025790000 |
| H0,5/12 OR | 0.5 | AWG 20 | 12.00 | 6 | 1 | 2.6 | 0.15 | 0.25 | 8 | Orange | 500 | 9028260000 |
| H0,5/14 OR | 0.5 | AWG 20 | 14.00 | 8 | 1 | 2.6 | 0.15 | 0.25 | 10 | Orange | 500 | 9026060000 |
| H0,5/16 OR | 0.5 | AWG 20 | 16.00 | 10 | 1 | 2.6 | 0.15 | 0.25 | 12 | Orange | 500 | 9028270000 |
| H0,75/12 W | 0.75 | AWG 18 | 12.00 | 6 | 1.2 | 2.8 | 0.15 | 0.25 | 8 | White | 500 | 9028280000 |
| H0,75/14 W | 0.75 | AWG 18 | 14.00 | 8 | 1.2 | 2.8 | 0.15 | 0.25 | 10 | White | 500 | 9026070000 |
| H0,75/16 W | 0.75 | AWG 18 | 16.00 | 10 | 1.2 | 2.8 | 0.15 | 0.25 | 12 | White | 500 | 9028290000 |
| H0,75/18 W | 0.75 | AWG 18 | 18.00 | 12 | 1.2 | 2.8 | 0.15 | 0.25 | 14 | White | 500 | 9028300000 |
| H1,0/12 GE | 1 | AWG 17 | 12.00 | 6 | 1.4 | 3 | 0.15 | 0.25 | 8 | Yellow | 500 | 9028310000 |
| H1,0/14 GE | 1 | AWG 17 | 14.00 | 8 | 1.4 | 3 | 0.15 | 0.25 | 10 | Yellow | 500 | 9026080000 |
| H1,0/16 GE | 1 | AWG 17 | 16.00 | 10 | 1.4 | 3 | 0.15 | 0.25 | 12 | Yellow | 500 | 9028320000 |
| H1,0/18 GE | 1 | AWG 17 | 18.00 | 12 | 1.4 | 3 | 0.15 | 0.25 | 15 | Yellow | 500 | 9028340000 |
| H1,5/14 R S | 1.5 | AWG 16 | 14.00 | 8 | 1.7 | 3.5 | 0.15 | 0.25 | 10 | Red | 500 | 9026090000 |
| H1,5/16 R S | 1.5 | AWG 16 | 16.00 | 10 | 1.7 | 3.5 | 0.15 | 0.25 | 12 | Red | 500 | 9028350000 |
| H2,5/15 BL | 2.5 | AWG 14 | 15.00 | 8 | 2.2 | 4.2 | 0.15 | 0.25 | 10 | Blue | 500 | 9026100000 |
| H4,0/18 GR | 4 | AWG 12 | 18.00 | 10 | 2.8 | 4.8 | 0.2 | 0.3 | 12 | Grey | 250 | 9026010000 |



- Polypropylene conical entry funnel
- Heat-resistant up to 105°C
- The entry funnel can also be manufactured from a non-flammable material on request

For conductors from 0.14-150 mm² (AWG 26-300MCM)

Material E-Cu, electro-galvanised

Dimensional tolerance acc. to DIN 46228 Part 4

Weidmüller colour code

Strips of linked wire-end ferrules



| Type | Ø mm ² | AWG | L1 | L2 | D1 | D2 | S1 | S2 | Stripping length | Colour | Qty. | Order No. |
|----------------|-------------------|--------|-------|----|-----|-----|------|------|------------------|----------|------|------------|
| H0,5/14 OR BD | 0.5 | AWG 20 | 14.00 | 8 | 1 | 2.6 | 0.15 | 0.25 | 10 | ● Orange | 500 | 9004270000 |
| H0,75/14 W BD | 0.75 | AWG 18 | 14.00 | 8 | 1.2 | 2.8 | 0.15 | 0.25 | 10 | ○ White | 500 | 9004290000 |
| H1,0/14 GE BD | 1 | AWG 17 | 14.00 | 8 | 1.4 | 3 | 0.15 | 0.25 | 10 | ● Yellow | 500 | 9004320000 |
| H1,5/14 R BD | 1.5 | AWG 16 | 14.00 | 8 | 1.7 | 3.2 | 0.15 | 0.25 | 10 | ● Red | 500 | 9004340000 |
| H2,5/14D BL BD | 2.5 | AWG 14 | 14.00 | 8 | 2.5 | 4 | 0.15 | 0.25 | 11 | ● Blue | 500 | 9004360000 |


Weidmüller colour code

Reel of linked wire-end ferrules



| Type | Ø mm ² | AWG | L1 | L2 | D1 | D2 | S1 | S2 | Stripping length | Colour | Qty. | Order No. |
|-------------|-------------------|--------|-------|----|-----|-----|------|------|------------------|-------------|------|------------|
| H0,34/12 TK | 0.34 | AWG 22 | 12.00 | 8 | 0.8 | 2 | 0.15 | 0.25 | 10 | ● Turquoise | 5000 | 9004390000 |
| H0,5/14 OR | 0.5 | AWG 20 | 14.00 | 8 | 1 | 2.6 | 0.15 | 0.25 | 10 | ● Orange | 5000 | 9005810000 |
| H0,75/14 W | 0.75 | AWG 18 | 14.00 | 8 | 1.2 | 2.8 | 0.15 | 0.25 | 10 | ○ White | 5000 | 9005820000 |
| H1,0/14 GE | 1 | AWG 17 | 14.00 | 8 | 1.4 | 3 | 0.15 | 0.25 | 10 | ● Yellow | 5000 | 9005830000 |
| H1,5/14 R B | 1.5 | AWG 16 | 14.00 | 8 | 1.7 | 3.2 | 0.15 | 0.25 | 10 | ● Red | 5000 | 9005840000 |
| H2,5/14D BL | 2.5 | AWG 14 | 14.00 | 8 | 2.2 | 4 | 0.15 | 0.25 | 10 | ● Blue | 3000 | 9005850000 |

Wire-end ferrules with plastic collars



- Polypropylene conical entry funnel
- Heat-resistant up to 105 °C
- The entry funnel can also be manufactured from a non-flammable material on request

For conductors from 0.14-150 mm² (AWG 26-300MCM)

Material E-Cu, electro-galvanised

Dimensional tolerance acc. to DIN 46228 Part 4

DIN colour code

Packed loose



| Type | Ø mm ² | AWG | L1 | L2 | D1 | D2 | S1 | S2 | Stripping length | Colour | VG* | Qty. | Order No. |
|--------------|-------------------|--------|-------|----|------|------|------|------|------------------|----------|-------------|------|------------|
| H0.5/18D W | 0.5 | AWG 20 | 18.00 | 12 | 1 | 2.6 | 0.15 | 0.25 | 14 | ○ White | T 20A 003 A | 500 | 1076990000 |
| H0.5/12D W | 0.5 | AWG 20 | 12.00 | 6 | 1 | 2.6 | 0.15 | 0.25 | 8 | ○ White | T 20A 001 A | 500 | 9019000000 |
| H0.75/14D G | 0.75 | AWG 18 | 14.00 | 8 | 1.2 | 2.8 | 0.15 | 0.25 | 10 | ● Grey | T 20A 004 A | 500 | 9019040000 |
| H0.5/14D W | 0.5 | AWG 20 | 14.00 | 8 | 1 | 2.6 | 0.15 | 0.25 | 10 | ○ White | T 20A 002 A | 500 | 9019010000 |
| H0.5/16D W | 0.5 | AWG 20 | 16.00 | 10 | 1 | 2.6 | 0.15 | 0.25 | 12 | ○ White | T 20A 003 A | 500 | 9019020000 |
| H0.75/12D G | 0.75 | AWG 18 | 12.00 | 6 | 1.2 | 2.8 | 0.15 | 0.25 | 8 | ● Grey | T 20A 005 A | 500 | 9019030000 |
| H0.75/16D G | 0.75 | AWG 18 | 16.00 | 10 | 1.2 | 2.8 | 0.15 | 0.25 | 12 | ● Grey | T 20A 006 A | 500 | 9019050000 |
| H0.75/18D G | 0.75 | AWG 18 | 18.00 | 12 | 1.2 | 2.8 | 0.15 | 0.25 | 14 | ● Grey | T 20A 007 A | 500 | 9019060000 |
| H1.0/12D R | 1 | AWG 17 | 12.00 | 6 | 1.4 | 3 | 0.15 | 0.25 | 8 | ● Red | T 20A 008 A | 500 | 9019070000 |
| H1.0/14D R | 1 | AWG 17 | 14.00 | 8 | 1.4 | 3 | 0.15 | 0.25 | 10 | ● Red | T 20A 009 A | 500 | 9019080000 |
| H1.0/16D R | 1 | AWG 17 | 16.00 | 10 | 1.4 | 3 | 0.15 | 0.25 | 12 | ● Red | T 20A 010 A | 500 | 9019100000 |
| H1.0/18D R | 1 | AWG 17 | 18.00 | 12 | 1.4 | 3 | 0.15 | 0.25 | 15 | ● Red | T 20A 011 A | 500 | 9019110000 |
| H1.5/14D SW | 1.5 | AWG 16 | 14.00 | 8 | 1.7 | 3.5 | 0.15 | 0.25 | 10 | ● Black | T 20A 012 A | 500 | 9019120000 |
| H1.5/16D SW | 1.5 | AWG 16 | 16.00 | 10 | 1.7 | 3.5 | 0.15 | 0.25 | 12 | ● Black | T 20A 013 A | 500 | 9019130000 |
| H1.5/18D SW | 1.5 | AWG 16 | 18.00 | 12 | 1.7 | 3.5 | 0.15 | 0.25 | 15 | ● Black | T 20A 014 A | 500 | 9019140000 |
| H1.5/24D SW | 1.5 | AWG 16 | 24.00 | 18 | 1.7 | 3.5 | 0.15 | 0.25 | 20 | ● Black | T 20A 015 A | 500 | 9019150000 |
| H2.5/15D BL | 2.5 | AWG 14 | 15.00 | 8 | 2.2 | 4.2 | 0.15 | 0.25 | 10 | ● Blue | T 20A 017 A | 500 | 9019160000 |
| H2.5/19D BL | 2.5 | AWG 14 | 19.00 | 12 | 2.2 | 4.2 | 0.15 | 0.25 | 14 | ● Blue | T 20A 017 A | 500 | 9019170000 |
| H2.5/25D BL | 2.5 | AWG 14 | 25.00 | 18 | 2.2 | 4.2 | 0.15 | 0.25 | 20 | ● Blue | T 20A 018 A | 500 | 9019180000 |
| H4.0/18D GR | 4 | AWG 12 | 18.00 | 10 | 2.8 | 4.8 | 0.2 | 0.3 | 12 | ● Grey | T 20A 019 A | 500 | 9019190000 |
| H4.0/20D GR | 4 | AWG 12 | 20.00 | 12 | 2.8 | 4.8 | 0.2 | 0.3 | 14 | ● Grey | T 20A 020 A | 500 | 9019200000 |
| H4.0/26D GR | 4 | AWG 12 | 26.00 | 18 | 2.8 | 4.8 | 0.2 | 0.3 | 20 | ● Grey | T 20A 021 A | 100 | 9019210000 |
| H6.0/20D GE | 6 | AWG 10 | 20.00 | 12 | 3.5 | 6.3 | 0.2 | 0.3 | 14 | ● Yellow | T 20A 022 A | 100 | 9019220000 |
| H6.0/26D GE | 6 | AWG 10 | 26.00 | 18 | 3.5 | 6.3 | 0.2 | 0.3 | 20 | ● Yellow | T 20A 023 A | 100 | 9019230000 |
| H10.0/22D R | 10 | AWG 7 | 22.00 | 12 | 4.5 | 7.6 | 0.2 | 0.4 | 15 | ● Red | T 20A 024 A | 100 | 9019240000 |
| H10.0/28D R | 10 | AWG 7 | 28.00 | 18 | 4.5 | 7.6 | 0.2 | 0.4 | 21 | ● Red | T 20A 025 A | 100 | 9019250000 |
| H16.0/22D B | 16 | AWG 6 | 22.00 | 12 | 5.8 | 8.8 | 0.2 | 0.4 | 15 | ● Blue | T 20A 026 A | 100 | 9019260000 |
| H16.0/28D B | 16 | AWG 6 | 28.00 | 18 | 5.8 | 8.8 | 0.2 | 0.4 | 21 | ● Blue | T 20A 027 A | 100 | 9019270000 |
| H25.0/30D 1 | 25 | AWG 3 | 30.00 | 16 | 7.3 | 11.2 | 0.2 | 0.4 | 18 | ● Yellow | T 20A 028 A | 50 | 9019280000 |
| H25.0/36D G | 25 | AWG 3 | 36.00 | 22 | 7.3 | 11.2 | 0.2 | 0.4 | 24 | ● Yellow | T 20A 030 A | 50 | 9019300000 |
| H35.0/30D 1 | 35 | AWG 2 | 30.00 | 16 | 8.3 | 12.7 | 0.2 | 0.4 | 19 | ● Red | T 20A 031 A | 50 | 9019310000 |
| H35.0/32D R | 35 | AWG 2 | 32.00 | 18 | 8.3 | 12.7 | 0.2 | 0.4 | 19 | ● Red | T 20A 032 A | 50 | 9019320000 |
| H35.0/39D R | 35 | AWG 2 | 39.00 | 25 | 8.3 | 12.7 | 0.2 | 0.4 | 28 | ● Red | T 20A 033 A | 50 | 9019330000 |
| H50.0/41D B | 50 | AWG 1 | 41.00 | 25 | 10.3 | 15 | 0.3 | 0.5 | 31 | ● Blue | T 20A 035 A | 50 | 9019350000 |
| H50.0/36D BL | 50 | AWG 1 | 36.00 | 20 | 10.3 | 15 | 0.3 | 0.5 | 26 | ● Blue | T 20A 034 A | 50 | 9019340000 |

DIN colour code

In multi-pack bag




| Type | Ø mm ² | AWG | L1 | L2 | D1 | D2 | S1 | S2 | Stripping length | Colour | VG* | Qty. | Order No. |
|-------------|-------------------|--------|-------|----|-----|-----|------|------|------------------|---------|-------------|------|------------|
| H0.75/14D G | 0.75 | AWG 18 | 14.00 | 8 | 1.2 | 2.8 | 0.15 | 0.25 | 10 | ● Grey | T 20A 005 A | 500 | 9019410000 |
| H0.5/14D W | 0.5 | AWG 20 | 14.00 | 8 | 1 | 2.6 | 0.15 | 0.25 | 10 | ○ White | T 20A 002 A | 500 | 9019400000 |
| H1.0/14D R | 1 | AWG 17 | 14.00 | 8 | 1.4 | 3 | 0.15 | 0.25 | 10 | ● Red | T 20A 009 A | 500 | 9019420000 |
| H1.5/14D SW | 1.5 | AWG 16 | 14.00 | 8 | 1.7 | 3.5 | 0.15 | 0.25 | 10 | ● Black | T 20A 012 A | 500 | 9019430000 |
| H2.5/15 BL | 2.5 | AWG 14 | 15.00 | 8 | 2.2 | 4.2 | 0.15 | 0.25 | 10 | ● Blue | T 20A 017 A | 500 | 9026100000 |
| H4.0/18 GR | 4 | AWG 12 | 18.00 | 10 | 2.8 | 4.8 | 0.2 | 0.3 | 12 | ● Grey | T 20A 019 A | 250 | 9026010000 |

DIN colour code

Strips of linked wire-end ferrules



| Type | Ø mm ² | AWG | L1 | L2 | D1 | D2 | S1 | S2 | Stripping length | Colour | VG* | Qty. | Order No. |
|-------------|-------------------|--------|-------|----|-----|-----|------|------|------------------|---------|-------------|------|------------|
| H0.5/14D W | 0.5 | AWG 20 | 14.00 | 8 | 1 | 2.6 | 0.15 | 0.25 | 10 | ○ White | T 20A 002 A | 500 | 9004280000 |
| H0.75/14D G | 0.75 | AWG 18 | 14.00 | 8 | 1.2 | 2.8 | 0.15 | 0.25 | 10 | ● Grey | T 20A 005 A | 500 | 9004300000 |
| H1.0/14D R | 1 | AWG 17 | 14.00 | 8 | 1.4 | 3 | 0.15 | 0.25 | 10 | ● Red | T 20A 009 A | 500 | 9004330000 |
| H1.5/14D SW | 1.5 | AWG 16 | 14.00 | 8 | 1.7 | 3.2 | 0.15 | 0.25 | 10 | ● Black | T 20A 012 A | 500 | 9004350000 |
| H2.5/14D BL | 2.5 | AWG 14 | 14.00 | 8 | 2.5 | 4 | 0.15 | 0.25 | 11 | ● Blue | T 20A 017 A | 500 | 9004360000 |



- Polypropylene conical entry funnel
- Heat-resistant up to 105 °C
- The entry funnel can also be manufactured from a non-flammable material on request

For conductors from 0.14-150 mm² (AWG 26-300MCM)

Material E-Cu, electro-galvanised

Dimensional tolerance acc. to DIN 46228 Part 4


DIN colour code

Reel of linked wire-end ferrules



| Type | Ø mm ² | AWG | L1 | L2 | D1 | D2 | S1 | S2 | Stripping length | Colour | Qty. | Order No. |
|--------------------|-------------------|--------|-------|----|-----|-----|------|------|------------------|---------|------|------------|
| H0,5/14D W BD GSP | 0.5 | AWG 20 | 14.00 | 8 | 1 | 2.6 | 0.15 | 0.25 | 10 | ○ White | 5000 | 9005860000 |
| H0,75/14D GR | 0.75 | AWG 18 | 14.00 | 8 | 1.2 | 2.8 | 0.15 | 0.25 | 10 | ● Grey | 5000 | 9005870000 |
| H1,0/14D R BD GSP | 1 | AWG 17 | 14.00 | 8 | 1.4 | 3 | 0.15 | 0.25 | 10 | ● Red | 5000 | 9005880000 |
| H1,5/14D SW BD GSP | 1.5 | AWG 16 | 14.00 | 8 | 1.7 | 3.2 | 0.15 | 0.25 | 10 | ● Black | 5000 | 9005890000 |
| H2,5/14D BL BD GSP | 2.5 | AWG 14 | 14.00 | 8 | 2.2 | 4 | 0.15 | 0.25 | 10 | ● Blue | 3000 | 9005850000 |

Wire-end ferrules with plastic collars



- Polypropylene conical entry funnel
- Heat-resistant up to 105 °C
- The entry funnel can also be manufactured from a non-flammable material on request

For conductors from 0.14-150 mm² (AWG 26-300MCM)

Material E-Cu, electro-galvanised

Dimensional tolerance acc. to DIN 46228 Part 4

Other colour code

Packed loose



| Type | Ø mm ² | AWG | L1 | L2 | D1 | D2 | S1 | S2 | Stripping length | Colour | Qty. | Order No. |
|---------------|-------------------|--------|-------|----|-----|------|------|------|------------------|--------------|------|------------|
| H0,25/10T GE | 0.25 | AWG 24 | 10.00 | 6 | 0.8 | 1.8 | 0.15 | 0.25 | 8 | ● Yellow | 500 | 9021010000 |
| H0,25/12T GE | 0.25 | AWG 24 | 12.00 | 8 | 0.8 | 1.8 | 0.15 | 0.25 | 10 | ● Yellow | 500 | 9021020000 |
| H0,5/12D W | 0.5 | AWG 20 | 12.00 | 6 | 1 | 2.6 | 0.15 | 0.25 | 8 | ○ White | 500 | 9019000000 |
| H0,5/14D W | 0.5 | AWG 20 | 14.00 | 8 | 1 | 2.6 | 0.15 | 0.25 | 10 | ○ White | 500 | 9019010000 |
| H0,5/16D W | 0.5 | AWG 20 | 16.00 | 10 | 1 | 2.6 | 0.15 | 0.25 | 12 | ○ White | 500 | 9019020000 |
| H0,75/12D GR | 0.75 | AWG 18 | 12.00 | 6 | 1.2 | 2.8 | 0.15 | 0.25 | 8 | ● Grey | 500 | 9019030000 |
| H0,75/14 HBL | 0.75 | AWG 18 | 14.00 | 8 | 1.2 | 2.8 | 0.15 | 0.25 | 10 | ● Light Blue | 500 | 9021040000 |
| H0,75/16T HBL | 0.75 | AWG 18 | 16.00 | 10 | 1.2 | 2.8 | 0.15 | 0.25 | 12 | ● Light Blue | 500 | 9021050000 |
| H0,75/18T HBL | 0.75 | AWG 18 | 18.00 | 12 | 1.2 | 2.8 | 0.15 | 0.25 | 14 | ● Light Blue | 500 | 9021060000 |
| H1,0/16D R | 1 | AWG 17 | 16.00 | 10 | 1.4 | 3 | 0.15 | 0.25 | 12 | ● Red | 500 | 9019100000 |
| H1,0/18D R | 1 | AWG 17 | 18.00 | 12 | 1.4 | 3 | 0.15 | 0.25 | 15 | ● Red | 500 | 9019110000 |
| H1,5/14D SW | 1.5 | AWG 16 | 14.00 | 8 | 1.7 | 3.5 | 0.15 | 0.25 | 10 | ● Black | 500 | 9019120000 |
| H1,5/16D SW | 1.5 | AWG 16 | 16.00 | 10 | 1.7 | 3.5 | 0.15 | 0.25 | 12 | ● Black | 500 | 9019130000 |
| H1,5/18D SW | 1.5 | AWG 16 | 18.00 | 12 | 1.7 | 3.5 | 0.15 | 0.25 | 15 | ● Black | 500 | 9019140000 |
| H1,5/24D SW | 1.5 | AWG 16 | 24.00 | 18 | 1.7 | 3.5 | 0.15 | 0.25 | 20 | ● Black | 500 | 9019150000 |
| H2,5/15T GR | 2.5 | AWG 14 | 15.00 | 8 | 2.2 | 4.2 | 0.15 | 0.25 | 10 | ● Grey | 500 | 9021070000 |
| H2,5/19T GR | 2.5 | AWG 14 | 19.00 | 12 | 2.2 | 4.2 | 0.15 | 0.25 | 14 | ● Grey | 500 | 9021080000 |
| H2,5/25T GR | 2.5 | AWG 14 | 25.00 | 18 | 2.2 | 4.2 | 0.15 | 0.25 | 20 | ● Grey | 500 | 9021090000 |
| H4,0/18T OR | 4 | AWG 12 | 18.00 | 10 | 2.8 | 4.8 | 0.2 | 0.3 | 12 | ● Orange | 500 | 9021100000 |
| H4,0/20T OR | 4 | AWG 12 | 20.00 | 12 | 2.8 | 4.8 | 0.2 | 0.3 | 14 | ● Orange | 500 | 9021110000 |
| H4,0/26T OR | 4 | AWG 12 | 26.00 | 18 | 2.8 | 4.8 | 0.2 | 0.3 | 20 | ● Orange | 100 | 9021120000 |
| H6,0/20T GN | 6 | AWG 10 | 20.00 | 12 | 3.5 | 6.3 | 0.2 | 0.3 | 14 | ● Green | 100 | 9021130000 |
| H6/26T GN | 6 | AWG 10 | 26.00 | 18 | 3.5 | 6.3 | 0.2 | 0.3 | 20 | ● Green | 100 | 9021140000 |
| H10,0/22T BR | 10 | AWG 7 | 22.00 | 12 | 4.5 | 7.6 | 0.2 | 0.4 | 15 | ● Brown | 100 | 9021150000 |
| H10,0/28T BR | 10 | AWG 7 | 28.00 | 18 | 4.5 | 7.6 | 0.2 | 0.4 | 21 | ● Brown | 100 | 9021160000 |
| H16,0/22T W | 16 | AWG 6 | 22.00 | 12 | 5.8 | 8.8 | 0.2 | 0.4 | 15 | ○ White | 100 | 9021170000 |
| H16,0/28T W | 16 | AWG 6 | 28.00 | 18 | 5.8 | 8.8 | 0.2 | 0.4 | 21 | ○ White | 100 | 9021180000 |
| H25,0/30T SW | 25 | AWG 3 | 30.00 | 16 | 7.3 | 11.2 | 0.2 | 0.4 | 18 | ● Black | 50 | 9021190000 |
| H25,0/36T SW | 25 | AWG 3 | 36.00 | 22 | 7.3 | 11.2 | 0.2 | 0.4 | 24 | ● Black | 50 | 9021200000 |

Other colour code

In multi-pack bag




| Type | Ø mm ² | AWG | L1 | L2 | D1 | D2 | S1 | S2 | Stripping length | Colour | Qty. | Order No. |
|-------------|-------------------|--------|-------|----|-----|-----|------|------|------------------|--------------|------|------------|
| H0,14/10T B | 0.14 | AWG 26 | 10.00 | 6 | 0.6 | 1.5 | 0.15 | 0.25 | 8 | ● Brown | 500 | 9028250000 |
| H0,25/10T G | 0.25 | AWG 24 | 10.00 | 6 | 0.8 | 1.8 | 0.15 | 0.25 | 8 | ● Yellow | 500 | 9021210000 |
| H0,25/12T G | 0.25 | AWG 24 | 12.00 | 8 | 0.8 | 1.8 | 0.15 | 0.25 | 10 | ● Yellow | 500 | 9021220000 |
| H0,5/14D W | 0.5 | AWG 20 | 14.00 | 8 | 1 | 2.6 | 0.15 | 0.25 | 10 | ○ White | 500 | 9019400000 |
| H0,75/14T H | 0.75 | AWG 18 | 14.00 | 8 | 1.2 | 2.8 | 0.15 | 0.25 | 10 | ● Light Blue | 500 | 9021230000 |
| H1,0/14D R | 1 | AWG 17 | 14.00 | 8 | 1.4 | 3 | 0.15 | 0.25 | 10 | ● Red | 500 | 9019420000 |
| H1,5/14D SW | 1.5 | AWG 16 | 14.00 | 8 | 1.7 | 3.5 | 0.15 | 0.25 | 10 | ● Black | 500 | 9019430000 |
| H2,5/15T GR | 2.5 | AWG 14 | 15.00 | 8 | 2.2 | 4.2 | 0.15 | 0.25 | 10 | ● Grey | 500 | 9021240000 |
| H4,0/18T OR | 4 | AWG 12 | 18.00 | 10 | 2.8 | 4.8 | 0.2 | 0.3 | 12 | ● Orange | 250 | 9021250000 |

Other colour code

Strips of linked wire-end ferrules



| Type | Ø mm ² | AWG | L1 | L2 | D1 | D2 | S1 | S2 | Stripping length | Colour | Qty. | Order No. |
|-------------|-------------------|--------|-------|----|-----|-----|------|------|------------------|--------------|------|------------|
| H0,5/14D W | 0.5 | AWG 20 | 14.00 | 8 | 1 | 2.6 | 0.15 | 0.25 | 10 | ○ White | 500 | 9004280000 |
| H0,75/14T H | 0.75 | AWG 18 | 14.00 | 8 | 1.2 | 2.8 | 0.15 | 0.25 | 10 | ● Light Blue | 500 | 9004310000 |
| H1,0/14D R | 1 | AWG 17 | 14.00 | 8 | 1.4 | 3 | 0.15 | 0.25 | 10 | ● Red | 500 | 9004330000 |
| H1,5/14D SW | 1.5 | AWG 16 | 14.00 | 8 | 1.7 | 3.2 | 0.15 | 0.25 | 10 | ● Black | 500 | 9004350000 |
| H2,5/14T GR | 2.5 | AWG 14 | 14.00 | 8 | 2.2 | 4 | 0.15 | 0.25 | 11 | ● Grey | 500 | 9004370000 |



- Polypropylene conical entry funnel
- Heat-resistant up to 105 °C
- The entry funnel can also be manufactured from a non-flammable material on request

For conductors from 0.14-150 mm² (AWG 26-300MCM)

Material E-Cu, electro-galvanised

Dimensional tolerance acc. to DIN 46228 Part 4


Other colour code

Reel of linked wire-end ferrules



| Type | Ø mm ² | AWG | L1 | L2 | D1 | D2 | S1 | S2 | Stripping length | Colour | Qty. | Order No. |
|---------------------|-------------------|--------|-------|----|-----|-----|------|------|------------------|---------|------|------------|
| H0,5/14D W BD GSP | 0.5 | AWG 20 | 14.00 | 8 | 1 | 2.6 | 0.15 | 0.25 | 10 | ○ White | 5000 | 9005860000 |
| H0,75/14T BL BD GSP | 0.75 | AWG 18 | 14.00 | 8 | 1.2 | 2.8 | 0.15 | 0.25 | 10 | ● Blue | 5000 | 9005900000 |
| H1,0/14D R BD GSP | 1 | AWG 17 | 14.00 | 8 | 1.4 | 3 | 0.15 | 0.25 | 10 | ● Red | 5000 | 9005880000 |
| H1,5/14D SW BD GSP | 1.5 | AWG 16 | 14.00 | 8 | 1.7 | 3.2 | 0.15 | 0.25 | 10 | ● Black | 5000 | 9005890000 |
| H2,5/14T GR BD GSP | 2.5 | AWG 14 | 14.00 | 8 | 2.2 | 4 | 0.15 | 0.25 | 10 | ● Grey | 3000 | 9005910000 |

Twin wire-end ferrules with plastic collars

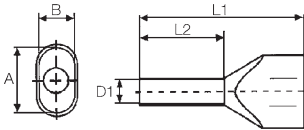

Polypropylene insertion funnel

Heat resistant up to 105 °C

If required, the insertion funnel can also be manufactured from a low-flammability material

For conductors of 2 x 0.5-2 x 16 mm² (2 x AWG 20-2 x AWG6)

Material E-Cu, tin-plated

Dimensional tolerance acc. to DIN 46228, part 4

Weidmüller colour code

Packed loose




| Type | Ø mm ² | AWG | L1 | L2 | D1 | D2 | S1 | S2 | Stripping length | Colour | Qty. | Order No. |
|----------------|-------------------|--------|-------|----|-----|----|------|-----|------------------|-------------|------|------------|
| H0,34/14 ZH TK | 0.34 | AWG 22 | 14.00 | | | | 0.15 | | | ● Turquoise | 500 | 1139070000 |
| H0,5/14 ZH OR | 0.5 | AWG 20 | 14.00 | 8 | 1.4 | | 0.15 | 0.3 | 11 | ● Orange | 500 | 9037200000 |
| H0,5/16 ZH OR | 0.5 | AWG 20 | 16.00 | 10 | 1.4 | | 0.15 | 0.3 | 13 | ● Orange | 500 | 9037210000 |
| H0,5/18 ZH OR | 0.5 | AWG 20 | 18.00 | 12 | 1.4 | | 0.15 | 0.3 | 15 | ● Orange | 500 | 9037220000 |
| H0,75/14 ZH W | 0.75 | AWG 18 | 14.00 | 8 | 1.7 | | 0.15 | 0.3 | 11 | ○ White | 500 | 9037230000 |
| H0,75/16 ZH W | 0.75 | AWG 18 | 16.00 | 10 | 1.7 | | 0.15 | 0.3 | 13 | ○ White | 500 | 9037240000 |
| H0,75/19S ZH W | 0.75 | AWG 18 | 19.00 | 12 | 1.7 | | 0.15 | 0.3 | 21 | ○ White | 500 | 9202820000 |
| H0,75/24 ZH W | 0.75 | AWG 18 | 24.00 | 18 | 1.7 | | 0.15 | 0.3 | 21 | ○ White | 500 | 9037250000 |
| H1,0/15 ZH GE | 1 | AWG 17 | 15.00 | 8 | 2 | | 0.15 | 0.3 | 11 | ● Yellow | 500 | 9037260000 |
| H1,0/15S ZH GE | 1 | AWG 17 | 15.00 | 8 | 2.2 | | 0.15 | 0.3 | 12 | ● Yellow | 500 | 9018690000 |
| H1,0/19 ZH GE | 1 | AWG 17 | 19.00 | 12 | 2 | | 0.15 | 0.3 | 16 | ● Yellow | 500 | 9037270000 |
| H1,0/25 ZH GE | 1 | AWG 17 | 25.00 | 18 | 2 | | 0.15 | 0.3 | 22 | ● Yellow | 500 | 9037280000 |
| H1,5/16 ZH R | 1.5 | AWG 16 | 16.00 | 8 | 2.2 | | 0.15 | 0.3 | 11 | ● Red | 500 | 9037290000 |
| H1,5/20 ZH R | 1.5 | AWG 16 | 20.00 | 12 | 2.2 | | 0.15 | 0.3 | 15 | ● Red | 500 | 9037300000 |
| H1,5/26 ZH R | 1.5 | AWG 16 | 26.00 | 18 | 2.2 | | 0.15 | 0.3 | 21 | ● Red | 100 | 9037310000 |
| H2,5/19D ZH BL | 2.5 | AWG 14 | 19.00 | 10 | 2.8 | | 0.15 | 0.4 | 13 | ● Blue | 500 | 9037500000 |
| H2,5/21D ZH BL | 2.5 | AWG 14 | 21.00 | 12 | 2.8 | | 0.15 | 0.4 | 15 | ● Blue | 100 | 9037510000 |
| H2,5/27D ZH BL | 2.5 | AWG 14 | 27.00 | 18 | 2.8 | | 0.15 | 0.4 | 21 | ● Blue | 100 | 9037520000 |
| H4,0/22D ZH GR | 4 | AWG 12 | 22.00 | 12 | 3.5 | | 0.2 | 0.5 | 15 | ● Grey | 100 | 9037530000 |
| H4,0/28D ZH GR | 4 | AWG 12 | 28.00 | 18 | 3.5 | | 0.2 | 0.5 | 21 | ● Grey | 100 | 9037540000 |
| H6,0/23 ZH SW | 6 | AWG 10 | 23.00 | 12 | 4.5 | | 0.2 | 0.5 | 20 | ● Black | 100 | 9037320000 |
| H6,0/29 ZH SW | 6 | AWG 10 | 29.00 | 18 | 4.5 | | 0.2 | 0.5 | 24 | ● Black | 100 | 9037330000 |
| H10,0/24 ZH EB | 10 | AWG 7 | 24.00 | 12 | 5.8 | | 0.2 | 0.5 | 17 | ● Ivory | 100 | 9037340000 |
| H10,0/30 ZH EB | 10 | AWG 7 | 30.00 | 18 | 5.8 | | 0.2 | 0.5 | 23 | ● Ivory | 100 | 9037350000 |
| H10,24S ZH EB | 10 | AWG 7 | 24.00 | 12 | 6.5 | | 0.2 | 0.5 | 17 | ● Ivory | 100 | 9018860000 |
| H10,30S ZH EB | 10 | AWG 7 | 30.00 | 18 | 6.5 | | 0.2 | 0.5 | 23 | ● Ivory | 100 | 9018870000 |
| H16,0/29 ZH GN | 16 | AWG 6 | 29.00 | 16 | 8.3 | | 0.3 | 0.6 | 20 | ● Green | 50 | 9037360000 |
| H16,0/38 ZH GN | 16 | AWG 6 | 38.00 | 25 | 8.3 | | 0.3 | 0.6 | 29 | ● Green | 50 | 9037370000 |

Weidmüller colour code

In multi-pack bag



| Type | Ø mm ² | AWG | L1 | L2 | D1 | D2 | S1 | S2 | Stripping length | Colour | Qty. | Order No. |
|---------------|-------------------|--------|-------|----|-----|----|------|-----|------------------|----------|------|------------|
| H0,5/14 ZH | 0.5 | AWG 20 | 14.00 | 8 | 1.4 | | 0.15 | 0.3 | 11 | ● Orange | 500 | 9004440000 |
| H0,75/14 ZH | 0.75 | AWG 18 | 14.00 | 8 | 1.7 | | 0.15 | 0.3 | 11 | ○ White | 500 | 9018510000 |
| H0,75/16 ZH | 0.75 | AWG 18 | 16.00 | 10 | 1.7 | | 0.15 | 0.3 | 13 | ○ White | 500 | 9004900000 |
| H1,0/15 ZH | 1 | AWG 17 | 15.00 | 8 | 2 | | 0.15 | 0.3 | 12 | ● Yellow | 500 | 9018530000 |
| H1,0/15S ZH | 1 | AWG 17 | 15.00 | 8 | 2.2 | | 0.15 | 0.3 | 12 | ● Yellow | 500 | 9018650000 |
| H1,0/19 ZH | 1 | AWG 17 | 19.00 | 12 | 2 | | 0.15 | 0.3 | 16 | ● Yellow | 500 | 9004910000 |
| H1,5/16 ZH | 1.5 | AWG 16 | 16.00 | 8 | 2.2 | | 0.15 | 0.3 | 11 | ● Red | 500 | 9004410000 |
| H2,5/19D ZH | 2.5 | AWG 14 | 19.00 | 10 | 2.8 | | 0.15 | 0.4 | 13 | ● Blue | 250 | 9004430000 |
| H1,5/20 ZH | 1.5 | AWG 16 | 20.00 | 12 | 2.2 | | 0.15 | 0.3 | 15 | ● Red | 500 | 9004920000 |
| H2,5/21D ZH | 2.5 | AWG 14 | 21.00 | 12 | 2.8 | | 0.15 | 0.4 | 15 | ● Blue | 250 | 9004740000 |
| H4,0/22D ZH G | 4 | AWG 12 | 22.00 | 12 | 3.5 | | 0.2 | 0.5 | 15 | ● Grey | 100 | 9004730000 |
| H6,0/23 ZH | 6 | AWG 10 | 23.00 | 12 | 4.5 | | 0.2 | 0.5 | 20 | ● Black | 100 | 9004930000 |
| H10,0/24 ZH | 10 | AWG 7 | 24.00 | 12 | 5.8 | | 0.2 | 0.5 | 17 | ● Ivory | 100 | 9004940000 |



- Polypropylene conical entry funnel
- Heat-resistant up to 105°C
- The entry funnel can also be manufactured from a non-flammable material on request

For conductors of 2 x 0.5-2 x 16 mm² (2 x AWG 20-2 x AWG6)

Material E-Cu, electro-galvanised

Dimensional tolerance acc. to DIN 46228 Part 4

DIN colour code

Packed loose



| Type | Ø mm ² | AWG | L1 | L2 | D1 | D2 | S1 | S2 | Stripping length | Colour | Qty. | Order No. |
|------------------|-------------------|--------|-------|----|-----|----|------|-----|------------------|----------|------|------------|
| H0,5/14D ZH W | 0.5 | AWG 20 | 14.00 | 8 | 1.4 | | 0.15 | 0.3 | 11 | ○ White | 500 | 9037380000 |
| H0,5/16D ZH W | 0.5 | AWG 20 | 16.00 | 10 | 1.4 | | 0.15 | 0.3 | 13 | ○ White | 500 | 9037390000 |
| H0,5/18D ZH W | 0.5 | AWG 20 | 18.00 | 12 | 1.4 | | 0.15 | 0.3 | 15 | ○ White | 500 | 9037400000 |
| H0,75/14D ZH GR | 0.75 | AWG 18 | 14.00 | 8 | 1.7 | | 0.15 | 0.3 | 11 | ● Grey | 500 | 9037410000 |
| H0,75/16D ZH GR | 0.75 | AWG 18 | 16.00 | 10 | 1.7 | | 0.15 | 0.3 | 13 | ● Grey | 500 | 9037420000 |
| H0,75/19DS ZH GR | 0.75 | AWG 18 | 19.00 | 12 | 1.7 | | 0.15 | 0.3 | 21 | ● Grey | 500 | 9202830000 |
| H0,75/24D ZH GR | 0.75 | AWG 18 | 24.00 | 18 | 1.7 | | 0.15 | 0.3 | 21 | ● Grey | 500 | 9037430000 |
| H1,0/15D ZH R | 1 | AWG 17 | 15.00 | 8 | 2 | | 0.15 | 0.3 | 11 | ● Red | 500 | 9037440000 |
| H1,0/19D ZH R | 1 | AWG 17 | 19.00 | 12 | 2 | | 0.15 | 0.3 | 16 | ● Red | 500 | 9037450000 |
| H1,0/22DS R ZH | 1 | AWG 17 | 22.00 | | 2 | | 0.15 | 0.3 | 21 | ● Red | 500 | 9036330000 |
| H1,0/25D ZH R | 1 | AWG 17 | 25.00 | 18 | 2 | | 0.15 | 0.3 | 22 | ● Red | 500 | 9037460000 |
| H1,5/16D ZH SW | 1.5 | AWG 16 | 16.00 | 8 | 2.2 | | 0.15 | 0.3 | 11 | ● Black | 500 | 9037470000 |
| H1,5/20D ZH SW | 1.5 | AWG 16 | 20.00 | 12 | 2.2 | | 0.15 | 0.3 | 15 | ● Black | 500 | 9037480000 |
| H1,5/26D ZH SW | 1.5 | AWG 16 | 25.00 | 18 | 2.2 | | 0.15 | 0.3 | 21 | ● Black | 100 | 9037490000 |
| H2,5/19D ZH BL | 2.5 | AWG 14 | 19.00 | 10 | 2.8 | | 0.15 | 0.4 | 13 | ● Blue | 500 | 9037500000 |
| H2,5/21D ZH BL | 2.5 | AWG 14 | 21.00 | 12 | 2.8 | | 0.15 | 0.4 | 15 | ● Blue | 100 | 9037510000 |
| H2,5/27D ZH BL | 2.5 | AWG 14 | 27.00 | 18 | 2.8 | | 0.15 | 0.4 | 21 | ● Blue | 100 | 9037520000 |
| H4,0/22D ZH GR | 4 | AWG 12 | 22.00 | 12 | 3.5 | | 0.2 | 0.5 | 15 | ● Grey | 100 | 9037530000 |
| H6,0/23D ZH GE | 6 | AWG 10 | 23.00 | 12 | 4.5 | | 0.2 | 0.5 | 20 | ● Yellow | 100 | 9037550000 |
| H4,0/28D ZH GR | 4 | AWG 12 | 28.00 | 18 | 3.5 | | 0.2 | 0.5 | 21 | ● Grey | 100 | 9037540000 |
| H6,0/29D ZH GE | 6 | AWG 10 | 29.00 | 18 | 4.5 | | 0.2 | 0.5 | 24 | ● Yellow | 100 | 9037560000 |
| H10,0/24D ZH R | 10 | AWG 7 | 24.00 | 12 | 5.8 | | 0.2 | 0.5 | 17 | ● Red | 100 | 9037570000 |
| H10,0/24DS ZH R | 10 | AWG 7 | 24.00 | 12 | 6.5 | | 0.2 | 0.5 | 17 | ● Red | 100 | 9018880000 |
| H10,0/30D ZH R | 10 | AWG 7 | 30.00 | 18 | 5.8 | | 0.2 | 0.5 | 23 | ● Red | 100 | 9037580000 |
| H10/30DS ZH R | 10 | AWG 7 | 30.00 | 18 | 6.5 | | 0.2 | 0.5 | 23 | ● Red | 100 | 9018890000 |
| H16,0/29D ZH BL | 16 | AWG 6 | 29.00 | 16 | 8.3 | | 0.3 | 0.6 | 20 | ● Blue | 50 | 9037590000 |
| H16,0/38D ZH BL | 16 | AWG 6 | 38.00 | 25 | 8.3 | | 0.3 | 0.6 | 29 | ● Blue | 50 | 9037600000 |


DIN colour code

In multi-pack bag



| Type | Ø mm ² | AWG | L1 | L2 | D1 | D2 | S1 | S2 | Stripping length | Colour | Qty. | Order No. |
|---------------|-------------------|--------|-------|----|-----|----|------|-----|------------------|----------|------|------------|
| H0,5/14D ZH | 0.5 | AWG 20 | 14.00 | 8 | 1.4 | | 0.15 | 0.3 | 11 | ○ White | 500 | 9004780000 |
| H0,75/14D Z | 0.75 | AWG 18 | 14.00 | 8 | 1.7 | | 0.15 | 0.3 | 11 | ● Grey | 500 | 9018520000 |
| H1,0/15D ZH | 1 | AWG 17 | 15.00 | 8 | 2.2 | | 0.15 | 0.3 | 12 | ● Red | 500 | 9018540000 |
| H1,0/19D ZH | 1 | AWG 17 | 19.00 | 12 | 2 | | 0.15 | 0.3 | 16 | ● Red | 500 | 9004760000 |
| H0,75/16D Z | 0.75 | AWG 18 | 16.00 | 10 | 1.7 | | 0.15 | 0.3 | 13 | ● Grey | 500 | 9004770000 |
| H1,5/16D ZH | 1.5 | AWG 16 | 16.00 | 8 | 2.2 | | 0.15 | 0.3 | 11 | ● Black | 500 | 9004420000 |
| H1,5/20D SW | 1.5 | AWG 16 | 20.00 | 12 | 2.2 | | 0.15 | 0.3 | 15 | ● Black | 500 | 9004750000 |
| H2,5/19D ZH | 2.5 | AWG 14 | 19.00 | 10 | 2.8 | | 0.15 | 0.4 | 13 | ● Blue | 250 | 9004430000 |
| H2,5/21D ZH | 2.5 | AWG 14 | 21.00 | 12 | 2.8 | | 0.15 | 0.4 | 15 | ● Blue | 250 | 9004740000 |
| H4,0/22D ZH G | 4 | AWG 12 | 22.00 | 12 | 3.5 | | 0.2 | 0.5 | 15 | ● Grey | 100 | 9004730000 |
| H6,0/23D ZH | 6 | AWG 10 | 23.00 | 12 | 4.5 | | 0.2 | 0.5 | 20 | ● Yellow | 100 | 9004720000 |
| H10,0/26D R | 10 | AWG 7 | 26.00 | 12 | 5.8 | | 0.2 | 0.5 | 17 | ● Red | 100 | 9004710000 |

Twin wire-end ferrules with plastic collars



- Polypropylene conical entry funnel
- Heat-resistant up to 105°C
- The entry funnel can also be manufactured from a non-flammable material on request

For conductors of 2 x 0.5-2 x 16 mm² (2 x AWG 20-2 x AWG6)

Material E-Cu, electro-galvanised

Dimensional tolerance acc. to DIN 46228 Part 4

Other colour code

Packed loose




| Type | Ø mm ² | AWG | L1 | L2 | D1 | D2 | S1 | S2 | Stripping length | Colour | Qty. | Order No. |
|-------------------|-------------------|--------|-------|----|-----|------|-----|----|------------------|--------|------------|-----------|
| H0,5/14 ZH OR | 0.5 | AWG 20 | 14.00 | 8 | 1.4 | 0.15 | 0.3 | 11 | ● Orange | 500 | 9037200000 | |
| H0,5/16 ZH OR | 0.5 | AWG 20 | 16.00 | 10 | 1.4 | 0.15 | 0.3 | 13 | ● Orange | 500 | 9037210000 | |
| H0,75/14T ZH HBL | 0.75 | AWG 18 | 14.00 | 8 | 1.7 | 0.15 | 0.3 | 11 | ● Light Blue | 500 | 9037610000 | |
| H0,5/18 ZH OR | 0.5 | AWG 20 | 18.00 | 12 | 1.4 | 0.15 | 0.3 | 15 | ● Orange | 500 | 9037220000 | |
| H0,75/16T ZH HBL | 0.75 | AWG 18 | 16.00 | 10 | 1.7 | 0.15 | 0.3 | 13 | ● Light Blue | 500 | 9037620000 | |
| H0,75/19TS ZH HBL | 0.75 | AWG 18 | 19.00 | 12 | 1.7 | 0.15 | 0.3 | 21 | ● Light Blue | 500 | 9202840000 | |
| H0,75/24T ZH HBL | 0.75 | AWG 18 | 24.00 | 18 | 1.7 | 0.15 | 0.3 | 21 | ● Light Blue | 500 | 9037630000 | |
| H1,0/15D ZH R | 1 | AWG 17 | 15.00 | 8 | 2 | 0.15 | 0.3 | 11 | ● Red | 500 | 9037440000 | |
| H1,0/19D ZH R | 1 | AWG 17 | 19.00 | 12 | 2 | 0.15 | 0.3 | 16 | ● Red | 500 | 9037450000 | |
| H1,0/25D ZH R | 1 | AWG 17 | 25.00 | 18 | 2 | 0.15 | 0.3 | 22 | ● Red | 500 | 9037460000 | |
| H1,5/16D ZH SW | 1.5 | AWG 16 | 16.00 | 8 | 2.2 | 0.15 | 0.3 | 11 | ● Black | 500 | 9037470000 | |
| H1,5/20D ZH SW | 1.5 | AWG 16 | 20.00 | 12 | 2.2 | 0.15 | 0.3 | 15 | ● Black | 500 | 9037480000 | |
| H1,5/26D ZH SW | 1.5 | AWG 16 | 25.00 | 18 | 2.2 | 0.15 | 0.3 | 21 | ● Black | 100 | 9037490000 | |
| H2,5/19T ZH GR | 2.5 | AWG 14 | 19.00 | 10 | 2.8 | 0.15 | 0.4 | 13 | ● Grey | 500 | 9037640000 | |
| H2,5/21T ZH GR | 2.5 | AWG 14 | 21.00 | 12 | 2.8 | 0.15 | 0.4 | 15 | ● Grey | 100 | 9037650000 | |
| H2,5/27T ZH GR | 2.5 | AWG 14 | 27.00 | 18 | 2.8 | 0.15 | 0.4 | 21 | ● Grey | 100 | 9037660000 | |
| H4,0/22T ZH OR | 4 | AWG 12 | 22.00 | 12 | 3.5 | 0.2 | 0.5 | 15 | ● Orange | 100 | 9037670000 | |
| H4,0/28T ZH OR | 4 | AWG 12 | 28.00 | 18 | 3.5 | 0.2 | 0.5 | 21 | ● Orange | 100 | 9037680000 | |
| H6,0/23T ZH GN | 6 | AWG 10 | 23.00 | 12 | 4.5 | 0.2 | 0.5 | 20 | ● Green | 100 | 9037690000 | |
| H6,0/29T ZH GN | 6 | AWG 10 | 29.00 | 18 | 4.5 | 0.2 | 0.5 | 24 | ● Green | 100 | 9037700000 | |
| H10,0/24T ZH BR | 10 | AWG 7 | 24.00 | 12 | 5.8 | 0.2 | 0.5 | 17 | ● Brown | 100 | 9037710000 | |
| H10,0/30T ZH BR | 10 | AWG 7 | 30.00 | 18 | 5.8 | 0.2 | 0.5 | 23 | ● Brown | 100 | 9037720000 | |
| H16,0/29T ZH W | 16 | AWG 6 | 29.00 | 16 | 8.3 | 0.3 | 0.6 | 20 | ○ White | 50 | 9037730000 | |
| H16,0/38T ZH W | 16 | AWG 6 | 38.00 | 25 | 8.3 | 0.3 | 0.6 | 29 | ○ White | 50 | 9037740000 | |

Other colour code

In multi-pack bag



| Type | Ø mm ² | AWG | L1 | L2 | D1 | D2 | S1 | S2 | Stripping length | Colour | Qty. | Order No. |
|-------------|-------------------|--------|-------|----|-----|------|-----|----|------------------|--------|------------|-----------|
| H0,75/16T Z | 0.75 | AWG 18 | 16.00 | 10 | 1.7 | 0.15 | 0.3 | 13 | ● Light Blue | 500 | 9005140000 | |
| H1,0/15D ZH | 1 | AWG 17 | 15.00 | 8 | 2.2 | 0.15 | 0.3 | 12 | ● Red | 500 | 9018540000 | |
| H1,0/19D ZH | 1 | AWG 17 | 19.00 | 12 | 2 | 0.15 | 0.3 | 16 | ● Red | 500 | 9004760000 | |
| H1,5/16D ZH | 1.5 | AWG 16 | 16.00 | 8 | 2.2 | 0.15 | 0.3 | 11 | ● Black | 500 | 9004420000 | |
| H1,5/20D SW | 1.5 | AWG 16 | 20.00 | 12 | 2.2 | 0.15 | 0.3 | 15 | ● Black | 500 | 9004750000 | |
| H2,5/19T ZH | 2.5 | AWG 14 | 19.00 | 10 | 2.8 | 0.15 | 0.4 | 13 | ● Grey | 250 | 9018580000 | |
| H2,5/21 ZH | 2.5 | AWG 14 | 21.00 | 12 | 2.8 | 0.15 | 0.4 | 15 | ● Grey | 250 | 9005150000 | |
| H4,0/22T ZH | 4 | AWG 12 | 2.00 | 12 | 3.5 | 0.2 | 0.5 | 15 | ● Orange | 100 | 9018590000 | |
| H6,0/23T ZH | 6 | AWG 10 | 23.00 | 12 | 4.5 | 0.2 | 0.5 | 20 | ● Green | 100 | 9005160000 | |
| H10,0/26T Z | 10 | AWG 7 | 26.00 | 12 | 5.8 | 0.2 | 0.5 | 17 | ● Brown | 100 | 9005170000 | |



- Polypropylene conical entry funnel
- Heat-resistant up to 105 °C
- The entry funnel can also be manufactured from a non-flammable material on request

For conductors from 1.5-16 mm² (AWG 26-250MCM)

Material E-Cu, electro-galvanised

Dimensional tolerance acc. to DIN 46228 Part 4

Weidmüller colour code

Packed loose



| Type | Ø mm ² | AWG | L1 | L2 | D1 | D2 | S1 | S2 | Stripping length | Colour | Qty. | Order No. |
|---------------|-------------------|--------|-------|------|-----|-----|------|-----|------------------|---------|------|------------|
| H1,5/24 XS SW | 1.5 | AWG 16 | 24.00 | 14.5 | 1.8 | 6.8 | 0.15 | 0.3 | 13 | ● Black | 100 | 9202870000 |
| H2,5/24 XS BL | 2.5 | AWG 14 | 24.00 | 14.5 | 2.3 | 7.6 | 0.15 | 0.3 | 20 | ● Black | 100 | 9202880000 |

Weidmüller colour code

In multi-pack bag



| Type | Ø mm ² | AWG | L1 | L2 | D1 | D2 | S1 | S2 | Stripping length | Colour | Qty. | Order No. |
|-------------|-------------------|--------|-------|----|-----|------|------|-----|------------------|----------|------|------------|
| H1,5/17,5X | 1.5 | AWG 16 | 17.50 | 8 | 1.8 | 6.8 | 0.15 | 0.3 | 13 | ● Black | 100 | 9006590000 |
| H1,5/19,5X | 1.5 | AWG 16 | 19.50 | 10 | 1.8 | 6.8 | 0.15 | 0.3 | 15 | ● Black | 100 | 9006630000 |
| H2,5/17,5X | 2.5 | AWG 14 | 17.50 | 8 | 2.3 | 7.6 | 0.15 | 0.3 | 14 | ● Blue | 100 | 9006670000 |
| H2,5/21,5X | 2.5 | AWG 14 | 21.50 | 12 | 2.3 | 7.6 | 0.15 | 0.3 | 17 | ● Blue | 100 | 9006710000 |
| H4,0/19,5X | 4 | AWG 12 | 19.50 | 10 | 2.9 | 7.8 | 0.2 | 0.3 | 14 | ● Grey | 100 | 9006750000 |
| H6,0/23,0X | 6 | AWG 10 | 23.00 | 12 | 3.6 | 8.1 | 0.2 | 0.3 | 17 | ● Yellow | 100 | 9006790000 |
| H10,0/24,0X | 10 | AWG 7 | 24.00 | 12 | 4.6 | 9.6 | 0.2 | 0.3 | 17 | ● Red | 100 | 9006830000 |
| H16,0/25,5X | 16 | AWG 6 | 25.50 | 12 | 6 | 11.9 | 0.2 | 0.3 | 26 | ● Blue | 100 | 9006870000 |

Wire-end ferrules with plastic collars, special sizes

- Polypropylene conical entry funnel
- Heat-resistant up to 105°C
- The entry funnel can also be manufactured from a non-flammable material on request

For conductors from 0.5-2.5 mm² Material E-Cu, electro-galvanised
Dimensional tolerance acc. to DIN 46228 Part 4

Weidmüller colour code

Packed loose




| Type | Ø mm ² | AWG | L1 | L2 | D1 | D2 | S1 | S2 | Stripping length | Colour | Qty. | Order No. |
|----------------|-------------------|--------|-------|----|------|-----|------|------|------------------|--------------|------|------------|
| H0,34/11 S TK | 0.34 | AWG 22 | 11.00 | 6 | 0.85 | 2.6 | 0.15 | 0.4 | 6 | ● Turquoise | 500 | 9204090000 |
| H0,5/14S OR | 0.5 | AWG 20 | 14.00 | 8 | 1 | 2.9 | 0.15 | 0.25 | 10 | ● Orange | 500 | 9004560000 |
| H0,5/14S W | 0.5 | AWG 20 | 14.00 | 8 | 1 | 2.9 | 0.15 | 0.25 | 10 | ○ White | 500 | 9004590000 |
| H0,5/16 DS W | 0.5 | AWG 20 | 16.00 | 10 | 1 | 2.9 | 0.15 | 0.25 | 12 | ○ White | 500 | 9202910000 |
| H 0,5/16 S OR | 0.5 | AWG 20 | 16.00 | 10 | 1 | 2.9 | 0.15 | 0.25 | 12 | ● Orange | 500 | 9202900000 |
| H0,75/14DS GR | 0.75 | AWG 18 | 14.00 | 8 | 1.2 | 3.4 | 0.15 | 0.25 | 10 | ● Grey | 500 | 9028580000 |
| H0,75/14S W | 0.75 | AWG 18 | 14.00 | 8 | 1.2 | 3.4 | 0.15 | 0.25 | 10 | ○ White | 500 | 9025960000 |
| H0,75/14TS HBL | 0.75 | AWG 18 | 14.00 | 8 | 1.2 | 3.4 | 0.15 | 0.25 | 10 | ● Light Blue | 500 | 9018550000 |
| H0,75/15S HBL | 0.75 | AWG 18 | 15.00 | 9 | 1.2 | 2.8 | 0.15 | 0.25 | 10 | ● Light Blue | 500 | 9204240000 |
| H1,0/14S GE | 1 | AWG 17 | 14.00 | 8 | 1.4 | 3.5 | 0.15 | 0.25 | 10 | ● Yellow | 500 | 9025970000 |
| H1,0/14S R | 1 | AWG 17 | 14.00 | 8 | 1.4 | 3.5 | 0.15 | 0.25 | 10 | ● Red | 500 | 9018560000 |
| H1,5/12S R | 1.5 | AWG 16 | 12.00 | 6 | 1.7 | 3.9 | 0.15 | 0.25 | 8 | ● Red | 500 | 9025690000 |
| H1,5/14S R | 1.5 | AWG 16 | 14.00 | 8 | 1.7 | 3.9 | 0.15 | 0.25 | 10 | ● Red | 500 | 9025980000 |
| H1,5/14S SW | 1.5 | AWG 16 | 14.00 | 8 | 1.7 | 3.9 | 0.15 | 0.25 | 10 | ● Black | 500 | 9025240000 |
| H2,5/12DS BL | 2.5 | AWG 14 | 12.00 | 6 | 2.2 | 4.2 | 0.15 | 0.25 | 8 | ● Blue | 500 | 9028490000 |
| H2,5/12TS GR | 2.5 | AWG 14 | 12.00 | 6 | 2.2 | 4.2 | 0.15 | 0.25 | 8 | ● Grey | 500 | 9036200000 |
| H2,5/14S BL | 2.5 | AWG 14 | 14.00 | 8 | 2.2 | 4 | 0.15 | 0.25 | 10 | ● Blue | 500 | 1333100000 |
| H2,5/14TS GR | 2.5 | AWG 14 | 14.00 | 8 | 2.2 | 4 | 0.15 | 0.25 | 10 | ● Grey | 500 | 9426770000 |
| H2,5/16DS BL | 2.5 | AWG 14 | 16.00 | 10 | 2.2 | 4.2 | 0.15 | 0.25 | 13 | ● Blue | 500 | 9036220000 |
| H 4,0/20 DS GR | 4 | AWG 12 | 20.00 | 12 | 2.9 | 4.7 | 0.2 | 0.5 | 15 | ● Grey | 500 | 9203630000 |
| H 10,0/22 S EB | 10 | AWG 7 | 22.00 | 12 | 4.6 | 7.1 | 0.2 | 0.6 | 15 | ● Ivory | 100 | 9203620000 |

Weidmüller colour code

In multi-pack bag



| Type | Ø mm ² | AWG | L1 | L2 | D1 | D2 | S1 | S2 | Stripping length | Colour | Qty. | Order No. |
|-------------|-------------------|--------|-------|----|-----|-----|------|------|------------------|----------|------|------------|
| H0,75/14S W | 0.75 | AWG 18 | 14.00 | 8 | 1.2 | 3.4 | 0.15 | 0.25 | 10 | ○ White | 500 | 9025700000 |
| H1,0/14S GE | 1 | AWG 17 | 14.00 | 8 | 1.4 | 3.5 | 0.15 | 0.25 | 10 | ● Yellow | 500 | 9025710000 |
| H1,5/14DS S | 1.5 | AWG 16 | 14.00 | 8 | 1.7 | 3.9 | 0.15 | 0.25 | 10 | ● Black | 500 | 9028360000 |
| H1,5/14S R | 1.5 | AWG 16 | 14.00 | 8 | 1.7 | 3.9 | 0.15 | 0.25 | 10 | ● Red | 500 | 9025720000 |



For conductors 0.25-185 mm² (AWG 24-350MCM) Material: tin-plated copper
Dimensional tolerances to DIN 46228 part 1

Without plastic collar

Packed loose



| Type | Ø mm ² | AWG | L1 | L2 | D1 | D2 | S1 | S2 | Stripping length | Qty. | Order No. |
|-----------|-------------------|-------------|-------|----|------|------|----|----|------------------|------|------------|
| H0,25/5 | 0.25 | AWG 24 | 5.00 | | 0.8 | 1.6 | | | 5 | 1000 | 9018910000 |
| H0,5/10 | 0.5 | AWG 20 | 10.00 | | 1 | 2.1 | | | 10 | 1000 | 9004050000 |
| H0,5/6 | 0.5 | AWG 20 | 6.00 | | 1 | 2.1 | | | 6 | 1000 | 0282600000 |
| H0,75/10 | 0.75 | AWG 18 | 10.00 | | 1.2 | 2.3 | | | 10 | 1000 | 0542500000 |
| H0,75/6 | 0.75 | AWG 18 | 6.00 | | 1.2 | 2.3 | | | 6 | 1000 | 0282700000 |
| H1,0/10 | 1 | AWG 17 | 10.00 | | 1.4 | 2.5 | | | 10 | 1000 | 0282800000 |
| H1,0/6 | 1 | AWG 17 | 6.00 | | 1.4 | 2.5 | | | 6 | 1000 | 0372600000 |
| H1,5/10 | 1.5 | AWG 16 | 10.00 | | 1.7 | 2.8 | | | 10 | 1000 | 0186500000 |
| H1,5/12 | 1.5 | AWG 16 | 12.00 | | 1.7 | 2.8 | | | 12 | 1000 | 9004060000 |
| H1,5/18 | 1.5 | AWG 16 | 18.00 | | 1.7 | 2.8 | | | 18 | 1000 | 9004070000 |
| H1,5/7 | 1.5 | AWG 16 | 7.00 | | 1.7 | 2.8 | | | 7 | 1000 | 0372700000 |
| H2,5/10 | 2.5 | AWG 14 | 10.00 | | 2.2 | 3.4 | | | 10 | 1000 | 9004080000 |
| H2,5/12 | 2.5 | AWG 14 | 12.00 | | 2.2 | 3.4 | | | 12 | 1000 | 0186100000 |
| H2,5/18 | 2.5 | AWG 14 | 18.00 | | 2.2 | 3.4 | | | 18 | 1000 | 9004090000 |
| H2,5/7 | 2.5 | AWG 14 | 7.00 | | 2.2 | 3.4 | | | 7 | 1000 | 0373000000 |
| H4,0/12 | 4 | AWG 12 | 12.00 | | 2.8 | 4 | | | 12 | 1000 | 0244100000 |
| H4,0/15 | 4 | AWG 12 | 15.00 | | 2.8 | 4 | | | 15 | 500 | 9004100000 |
| H4,0/18 | 4 | AWG 12 | 18.00 | | 2.8 | 4 | | | 18 | 500 | 9004110000 |
| H4,0/9 | 4 | AWG 12 | 9.00 | | 2.8 | 4 | | | 9 | 500 | 0373100000 |
| H6,0/10 | 6 | AWG 10 | 10.00 | | 3.5 | 4.7 | | | 10 | 500 | 9004120000 |
| H6,0/12 | 6 | AWG 10 | 12.00 | | 3.5 | 4.7 | | | 12 | 500 | 0191900000 |
| H6,0/15 | 6 | AWG 10 | 15.00 | | 3.5 | 4.7 | | | 15 | 500 | 0124700000 |
| H6,0/18 | 6 | AWG 10 | 18.00 | | 3.5 | 4.7 | | | 18 | 500 | 9004130000 |
| H10,0/12 | 10 | AWG 7 | 12.00 | | 4.5 | 5.8 | | | 12 | 500 | 0282900000 |
| H10,0/15 | 10 | AWG 7 | 15.00 | | 4.5 | 5.8 | | | 15 | 500 | 0124800000 |
| H10,0/18 | 10 | AWG 7 | 18.00 | | 4.5 | 5.8 | | | 18 | 500 | 0379300000 |
| H16,0/12 | 16 | AWG 6 | 12.00 | | 5.8 | 7.5 | | | 12 | 500 | 0492500000 |
| H16,0/15 | 16 | AWG 6 | 15.00 | | 5.8 | 7.5 | | | 15 | 500 | 0124300000 |
| H16,0/18 | 16 | AWG 6 | 18.00 | | 5.8 | 7.5 | | | 18 | 100 | 0375200000 |
| H16,0/25 | 16 | AWG 6 | 25.00 | | 5.8 | 7.5 | | | 25 | 100 | 9004150000 |
| H16,0/32 | 16 | AWG 6 | 32.00 | | 5.8 | 7.5 | | | 32 | 100 | 9004160000 |
| H25,0/15 | 25 | AWG 3 | 15.00 | | 7.3 | 9.5 | | | 15 | 250 | 0124400000 |
| H25,0/18 | 25 | AWG 3 | 18.00 | | 7.3 | 9.5 | | | 18 | 100 | 0375300000 |
| H25,0/25 | 25 | AWG 3 | 25.00 | | 7.3 | 9.5 | | | 25 | 250 | 9004170000 |
| H25,0/32 | 25 | AWG 3 | 32.00 | | 7.3 | 9.5 | | | 32 | 100 | 9004180000 |
| H35,0/18 | 35 | AWG 2 | 18.00 | | 8.3 | 11 | | | 18 | 100 | 0368900000 |
| H35,0/25 | 35 | AWG 2 | 25.00 | | 8.3 | 11 | | | 25 | 100 | 9004190000 |
| H35,0/30S | 35 | AWG 2 | 30.00 | | 8.3 | 11 | | | 30 | 100 | 9451000000 |
| H35,0/32 | 35 | AWG 2 | 32.00 | | 8.3 | 11 | | | 32 | 100 | 9004200000 |
| H50,0/18 | 50 | AWG 1 | 18.00 | | 10.3 | 13 | | | 18 | 100 | 9004210000 |
| H50,0/22S | 50 | AWG 1 | 22.00 | | 10.3 | 13 | | | 22 | 100 | 9025880000 |
| H50,0/32 | 50 | AWG 1 | 32.00 | | 10.3 | 13 | | | 32 | 100 | 9004220000 |
| H70,0/25 | 70 | AWG 2/0 | 25.00 | | 12.5 | 15 | | | 25 | 50 | 9004230000 |
| H70,0/32 | 70 | AWG 2/0 | 32.00 | | 12.5 | 15 | | | 32 | 50 | 9004240000 |
| H95,0/25 | 95 | AWG 3/0 | 25.00 | | 14.5 | 17 | | | 25 | 50 | 9004250000 |
| H95,0/32 | 95 | AWG 3/0 | 32.00 | | 14.5 | 17 | | | 32 | 50 | 9004260000 |
| H120,0/32 | 120 | AWG 4/0 | 32.00 | | 16.5 | 19 | | | 32 | 25 | 9036240000 |
| H150,0/32 | 150 | AWG 300 MCM | 32.00 | | 18.5 | 21 | | | 32 | 25 | 9036250000 |
| H185,0/32 | 185 | AWG 350 MCM | 32.00 | | 20 | 23.5 | | | 32 | 25 | 9036260000 |

Assortment of wire-end ferrules

0.14...0.75 mm²



Box filled with wire-end ferrules with plastic collar:

- in Weidmüller colour code

0.5...2.5 mm²



Box filled with wire-end ferrules with plastic collar:

- in Weidmüller colour code
- DIN colour code

ZH 0.5...2.5 mm²



Box filled with twin wire-end ferrules with plastic collars:

- in Weidmüller colour code

Assembly

| Type | | Piece |
|----------------|------------------|-------|
| H0,14/10 GR SV | Wire end ferrule | 500 |
| H0,25/10 HBL | Wire end ferrule | 500 |
| H0,34/10 TK | Wire end ferrule | 500 |
| H0,5/14 OR | Wire end ferrule | 500 |
| H0,75/14 W | Wire end ferrule | 500 |

Assembly

| Type | | Piece |
|--------------|------------------|-------|
| H1,0/14 GE | Wire end ferrule | 500 |
| H1,5/14 R | Wire end ferrule | 500 |
| H0,5/14D W | Wire end ferrule | 500 |
| H0,75/14D GR | Wire end ferrule | 500 |
| H2,5/15D BL | Wire end ferrule | 500 |

Assembly

| Type | | Piece |
|----------------|------------------|-------|
| H0,5/14 ZH OR | Wire end ferrule | 500 |
| H0,75/14 ZH W | Wire end ferrule | 500 |
| H1,0/15 ZH GE | Wire end ferrule | 500 |
| H1,5/16 ZH R | Wire end ferrule | 500 |
| H2,5/19D ZH BL | Wire end ferrule | 500 |

Technical data

| | |
|-------------------|---------------|
| Diameter / Height | 92 mm / 25 mm |
| Weight | 93 g |

Ordering data

| Colour code | Type | Order No. |
|-------------|--------------------|------------|
| Weidmüller | H-BOX 0,14-0,75QMM | 9025410000 |

Technical data

| | |
|-------------------|---------------|
| Diameter / Height | 92 mm / 40 mm |
| Weight | 93 g |

Ordering data

| Colour code | Type | Order No. |
|-------------|----------------------|------------|
| Weidmüller | H-BOX 0,5-2,5QMM | 9025900000 |
| DIN | H-BOX 0,5-2,5QMM DIN | 9025430000 |
| Misc. | H-BOX 0,5-2,5QMM T | 9023090000 |

Technical data


| | |
|-------------------|---------------|
| Diameter / Height | 92 mm / 40 mm |
| Weight | 93 g |

Ordering data

| Colour code | Type | Order No. |
|-------------|-------------------|------------|
| Weidmüller | ZH-BOX 0,5-2,5QMM | 9025390000 |

4.0...16 mm²

Empty box

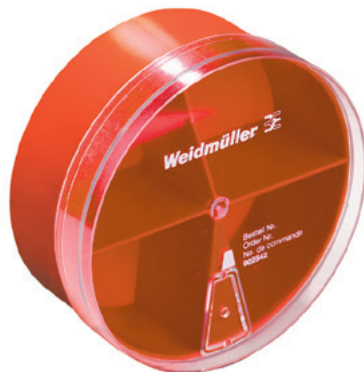

Box filled with wire-end ferrules with plastic collars:

- in Weidmüller colour code
- DIN colour code

Empty box for wire-end ferrules with

- 4 dividers
- 5 dividers
- 5 coloured inserts

Assembly

| Type | | Piece |
|-------------|------------------|-------|
| H6,0/20 SW | Wire end ferrule | 100 |
| H10,0/22 EB | Wire end ferrule | 100 |
| H16,0/22 GN | Wire end ferrule | 100 |
| H4/17 GRAU | Wire end ferrule | 500 |

Technical data

| | |
|-------------------|---------------|
| Diameter / Height | 92 mm / 40 mm |
| Weight | 93 g |

Ordering data

| Colour code | Type | Order No. |
|-------------|-----------------------|------------|
| Weidmüller | H-BOX 4,0-16,0QMM | 9025920000 |
| DIN | H-BOX 4,0-16,0QMM DIN | 9025400000 |

Technical data

| | |
|-------------------|---------------|
| Diameter / Height | 92 mm / 40 mm |
| Weight | |


Ordering data

| Colour code | Type | Order No. |
|-------------|------------------------|------------|
| Empty box | H-LEERBOX 4 TRENNSTEGE | 9025420000 |
| Empty box | H-LEERBOX 5 EINSAETZE | 9025940000 |
| Empty box | H-LEERBOX 5 TRENNSTEGE | 9025680000 |

Insulated cable connectors, PVC, with conical cable entry




Ring cable connector



Ordering data

| Type | Cross-section mm ² | Colour | Dimensions | d ¹ | d | D | L | b | S1* | Qty. | Order No. |
|---------------|-------------------------------|--------|------------|----------------|------|-----|-------|-------|------|------|------------|
| LIR 1.5M3 V | 0.5 - 1.5 | ● | M 3 | 3.2 | 5.5 | 4.0 | 16.05 | 11.3 | 0.75 | 100 | 9200070000 |
| LIR 1.5M3.5 V | 0.5 - 1.5 | ● | M 3.5 | 3.7 | 5.5 | 4.0 | 16.05 | 11.3 | 0.75 | 100 | 9200080000 |
| LIR 1.5M4 V | 0.5 - 1.5 | ● | M 4 | 4.3 | 8.0 | 4.0 | 18.3 | 11.3 | 0.75 | 100 | 9200090000 |
| LIR 1.5M5 V | 0.5 - 1.5 | ● | M 5 | 5.3 | 8.0 | 4.0 | 18.3 | 11.3 | 0.75 | 100 | 9200100000 |
| LIR 1.5M6 V | 0.5 - 1.5 | ● | M 6 | 6.4 | 11.6 | 4.0 | 21.0 | 11.3 | 0.75 | 100 | 9200110000 |
| LIR 1.5M8 V | 0.5 - 1.5 | ● | M 8 | 8.4 | 11.6 | 4.0 | 21.0 | 11.3 | 0.75 | 100 | 9200120000 |
| LIR 2.5M3 V | 1.5 - 2.5 | ● | M 3 | 3.2 | 6.4 | 4.5 | 15.6 | 11.3 | 0.8 | 100 | 9200150000 |
| LIR 2.5M3.5 V | 1.5 - 2.5 | ● | M 3.5 | 3.7 | 6.4 | 4.5 | 15.6 | 11.3 | 0.8 | 100 | 9200160000 |
| LIR 2.5M4 V | 1.5 - 2.5 | ● | M 4 | 4.4 | 8.5 | 4.5 | 19.05 | 11.3 | 0.8 | 100 | 9200170000 |
| LIR 2.5M5 V | 1.5 - 2.5 | ● | M 5 | 5.3 | 8.5 | 4.5 | 19.05 | 11.3 | 0.8 | 100 | 9200180000 |
| LIR 2.5M6 V | 1.5 - 2.5 | ● | M 6 | 6.4 | 12.0 | 4.5 | 22.3 | 11.3 | 0.8 | 100 | 9200190000 |
| LIR 2.5M8 V | 1.5 - 2.5 | ● | M 8 | 8.4 | 12.0 | 4.5 | 22.3 | 11.3 | 0.8 | 100 | 9200200000 |
| LIR 2.5M10 V | 1.5 - 2.5 | ● | M 10 | 10.5 | 14.0 | 4.5 | 22.3 | 11.3 | 0.8 | 100 | 9200210000 |
| LIR 6.0M4 V | 4 - 6 | ● | M 4 | 4.3 | 9.5 | 6.4 | 22.4 | 14.15 | 1 | 100 | 9200230000 |
| LIR 6M5 V | 4 - 6 | ● | M 5 | 5.3 | 9.5 | 6.4 | 22.4 | 14.15 | 1 | 100 | 9200240000 |
| LIR 6M6 V | 4 - 6 | ● | M 6 | 6.4 | 12.0 | 6.4 | 24.65 | 14.15 | 1 | 100 | 9200250000 |
| LIR 6M8 V | 4 - 6 | ● | M 8 | 8.4 | 15.0 | 6.4 | 27.65 | 14.15 | 1 | 100 | 9200260000 |
| LIR 6.0M10 V | 4 - 6 | ● | M 10 | 10.5 | 15.0 | 6.4 | 27.65 | 14.15 | 1 | 100 | 9200270000 |

Fork-type cable connector




Ordering data

| Type | Cross-section mm ² | Colour | Dimensions | d ¹ | d | D | L | b | S1* | Qty. | Order No. |
|---------------|-------------------------------|--------|------------|----------------|------|-----|-------|-------|------|------|------------|
| LIS 1.5M3 V | 0.5 - 1.5 | ● | M 3 | 3.2 | 5.7 | 4.0 | 17.8 | 11.3 | 0.75 | 100 | 9200290000 |
| LIS 1.5M3.5 V | 0.5 - 1.5 | ● | M 3.5 | 3.7 | 6.4 | 4.0 | 17.8 | 11.3 | 0.75 | 100 | 9200300000 |
| LIS 1.5M4 V | 0.5 - 1.5 | ● | M 4 | 4.3 | 7.2 | 4.0 | 17.8 | 11.3 | 0.75 | 100 | 9200310000 |
| LIS 1.5M5 V | 0.5 - 1.5 | ● | M 5 | 5.3 | 8.1 | 4.0 | 17.8 | 11.3 | 0.75 | 100 | 9200320000 |
| LIS 1.5M6 V | 0.5 - 1.5 | ● | M 6 | 6.4 | 11.0 | 4.0 | 21.3 | 11.3 | 0.75 | 100 | 9200330000 |
| LIS 2.5M3 V | 1.5 - 2.5 | ● | M 3 | 3.2 | 5.7 | 4.5 | 17.8 | 11.3 | 0.8 | 100 | 9200350000 |
| LIS 2.5M3.5 V | 1.5 - 2.5 | ● | M 3.5 | 3.7 | 6.4 | 4.5 | 17.8 | 11.3 | 0.8 | 100 | 9200360000 |
| LIS 2.5M4 V | 1.5 - 2.5 | ● | M 4 | 4.3 | 7.2 | 4.5 | 17.8 | 11.3 | 0.8 | 100 | 9200370000 |
| LIS 2.5M5 V | 1.5 - 2.5 | ● | M 5 | 5.3 | 8.1 | 4.5 | 17.8 | 11.3 | 0.8 | 100 | 9200380000 |
| LIS 2.5M6 V | 1.5 - 2.5 | ● | M 6 | 6.4 | 11.0 | 4.5 | 21.3 | 11.3 | 0.8 | 100 | 9200390000 |
| LIS 6.0M4 V | 4 - 6 | ● | M 4 | 4.3 | 9.0 | 6.4 | 21.35 | 14.15 | 1 | 100 | 9200410000 |
| LIS 6.0M5 V | 4 - 6 | ● | M 5 | 5.3 | 9.0 | 6.4 | 21.35 | 14.15 | 1 | 100 | 9200420000 |
| LIS 6.0M6 V | 4 - 6 | ● | M 6 | 6.4 | 12.0 | 6.4 | 25.15 | 14.15 | 1 | 100 | 9200430000 |
| LIS 6.0M8 V | 4 - 6 | ● | M 8 | 8.4 | 14 | 6.5 | 34 | 13.15 | 1 | 100 | 9200440000 |
| LIS 6.0M10 V | 4 - 6 | ● | M 10 | 10.5 | 18 | 6.5 | 34.7 | 13.15 | 1 | 100 | 9200450000 |

S1* = Connection density

Pin-type cable connector




Ordering data

| Type | Cross-section mm ² | Colour | Dimensions | D | L | b | f | Qty. | Order No. |
|--------------|-------------------------------|--------|------------|-----|-------|------|-----|------|------------|
| LIP 1.5R12 V | 0.5 - 1.5 | ● | 12.0 | 4 | 23.3 | 11.3 | 1.9 | 100 | 9200460000 |
| LIP 2.5R12 V | 1.5 - 2.5 | ● | 12.0 | 4.5 | 23.3 | 11.3 | 1.9 | 100 | 9200470000 |
| LIP 6.0R14 V | 4 - 6 | ● | 14.0 | 6.4 | 28.15 | 14.5 | 2.7 | 100 | 9200480000 |

Hook-type cable connector

to ESI 50-18 part 2



Ordering data

| Type | Cross-section mm ² | Colour | L1 | L2 | B | Qty. | Order No. |
|---------|-------------------------------|--------|------|-------|-----|------|------------|
| HB 1-17 | 0.25 - 1.5 | ● | 27.2 | 16.75 | 4.6 | 100 | 9036290000 |
| HB 1-13 | 1.0 - 2.5 | ● | 27.2 | 16.75 | 3.0 | 100 | 9036300000 |



Butt connector




Ordering data

| Type | Cross-section mm ² | Colour | Dimensions | D | L | Qty. | Order No. |
|---------------|-------------------------------|--------|------------|-----|----|------|------------|
| LIB 1.5B25 VF | 0.5 - 1.5 | ● | 24.5 | 3.8 | 26 | 100 | 9200490000 |
| LIB 2.5B25 VF | 1.5 - 2.5 | ● | 24.5 | 4.3 | 26 | 100 | 9200500000 |
| LIB 6.0B26 VF | 4 - 6 | ● | 26.0 | 6 | 26 | 100 | 9200510000 |

Flat blade receptacles

with copper sleeve




Ordering data

| Type | Cross-section mm ² | Colour | Dimensions | d2* | d3* | D | L | b | w | Qty. | Order No. |
|---------------|-------------------------------|--------|--------------|-----|-----|-----|------|------|-----|------|------------|
| LIF 1.5F288 R | 0.5 - 1.5 | ● | 2.8 x 0.8 mm | 2.8 | 0.8 | 4.0 | 18.7 | 10.0 | 3.8 | 100 | 9200520000 |
| LIF 1.5F488 R | 0.5 - 1.5 | ● | 4.8 x 0.8 mm | 4.8 | 0.8 | 4.0 | 19.2 | 10.0 | 5.7 | 100 | 9200530000 |
| LIF 1.5F638 R | 0.5 - 1.5 | ● | 6.3 x 0.8 mm | 6.3 | 0.8 | 4.0 | 20.8 | 10.0 | 7.4 | 100 | 9200540000 |
| LIF 2.5F488 R | 1.5 - 2.5 | ● | 4.8 x 0.8 mm | 4.8 | 0.8 | 5.0 | 19.2 | 10.0 | 5.7 | 100 | 9200550000 |
| LIF 2.5F638 R | 1.5 - 2.5 | ● | 6.3 x 0.8 mm | 6.3 | 0.8 | 5.0 | 20.8 | 10.0 | 7.4 | 100 | 9200560000 |
| LIF 6.0F638 R | 4 - 6 | ● | 6.3 x 0.8 mm | 6.3 | 0.8 | 6.8 | 23.8 | 13.0 | 7.4 | 100 | 9200570000 |

Flat blade connector

with copper sleeve



Ordering data

| Type | Cross-section mm ² | Colour | Dimensions | d2* | d3* | D | L | b | w | Qty. | Order No. |
|---------------|-------------------------------|--------|--------------|-----|-----|-----|------|------|-----|------|------------|
| LIF 1.5M638 R | 0.5 - 1.5 | ● | 6.3 x 0.8 mm | 6.3 | 0.8 | 4.0 | 20.8 | 10.0 | 6.3 | 100 | 9200580000 |
| LIF 2.5M638 R | 1.5 - 2.5 | ● | 6.3 x 0.8 mm | 6.3 | 0.8 | 5.0 | 20.8 | 10.0 | 6.3 | 100 | 9200590000 |
| LIF 6.0M638 R | 4 - 6 | ● | 6.3 x 0.8 mm | 6.3 | 0.8 | 6.8 | 23.8 | 13.0 | 6.3 | 100 | 9200600000 |

Flat blade receptacles, piggy-back

with copper sleeve




Ordering data

| Type | Cross-section mm ² | Colour | Dimensions | d2* | d3* | D | L | b | w | Qty. | Order No. |
|---------------|-------------------------------|--------|--------------|-----|-----|-----|------|------|-----|------|------------|
| LIF 1.5T638 R | 0.5 - 1.5 | ● | 6.3 x 0.8 mm | 6.3 | 0.8 | 4.0 | 20.8 | 10.0 | 7.4 | 100 | 9200610000 |
| LIF 2.5T638 R | 1.5 - 2.5 | ● | 6.3 x 0.8 mm | 6.3 | 0.8 | 5.8 | 20.8 | 10.0 | 7.4 | 100 | 9200620000 |
| LIF 6.0T638 R | 4 - 6 | ● | 6.3 x 0.8 mm | 6.3 | 0.8 | 6.8 | 23.8 | 13.0 | 7.4 | 100 | 9200630000 |

Flat blade receptacles, full insulation

with copper sleeve



Ordering data

| Type | Cross-section mm ² | Colour | Dimensions | d2* | d3* | D | L | b | w | Qty. | Order No. |
|----------------|-------------------------------|--------|--------------|-----|-----|-----|------|------|-----|------|------------|
| LIF 1.5F638 RF | 0.5 - 1.5 | ● | 6.3 x 0.8 mm | 6.3 | 0.8 | 4.0 | 22.0 | 10.5 | 7.4 | 100 | 9200640000 |
| LIF 2.5F638 RF | 1.5 - 2.5 | ● | 6.3 x 0.8 mm | 6.3 | 0.8 | 5.0 | 22.0 | 10.5 | 7.4 | 100 | 9200650000 |
| LIF 6.0F638 RF | 4 - 6 | ● | 6.3 x 0.8 mm | 6.3 | 0.8 | 6.8 | 24.5 | 13.0 | 5.7 | 100 | 9200660000 |


d2* = Plug-in width
d3* = Plug-in density

Insulated cable connectors, PVC, with conical cable entry



Round plug

with copper sleeve




Ordering data

| Type | Cross-section mm ² | Colour | Dimensions | d | D | L | b | Qty. | Order No. |
|-------------|-------------------------------|--------|------------|-----|-----|------|------|------|------------|
| LID 1,5M4 R | 0,5 - 1,5 | ● | ∅ 4 mm | 4,0 | 4,0 | 20,8 | 10,0 | 100 | 9200670000 |
| LID 2,5M5 R | 1,5 - 2,5 | ● | ∅ 5 mm | 5,0 | 5,0 | 20,8 | 10,0 | 100 | 9200680000 |
| LID 6,0M5 R | 4 - 6 | ● | ∅ 5 mm | 5,0 | 5,8 | 23,8 | 13,0 | 100 | 9200690000 |

Sockets for round plugs

with copper sleeve



Ordering data

| Type | Cross-section mm ² | Colour | Dimensions | d | D | L | b | Qty. | Order No. |
|--------------|-------------------------------|--------|------------|-----|-----|------|------|------|------------|
| LID 1,5F4 RF | 0,5 - 1,5 | ● | ∅ 4 mm | 4,0 | 4,0 | 23,0 | 10,5 | 100 | 9200700000 |
| LID 2,5F5 RF | 1,5 - 2,5 | ● | ∅ 5 mm | 5,0 | 5,0 | 23,0 | 11,5 | 100 | 9200710000 |
| LID 6,0F5 RF | 4 - 6 | ● | ∅ 5 mm | 5,0 | 5,0 | 24,0 | 13,8 | 100 | 9200720000 |