


**Cabtite (cable entry system)
CABTITE FR 16/8 BK SET**

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

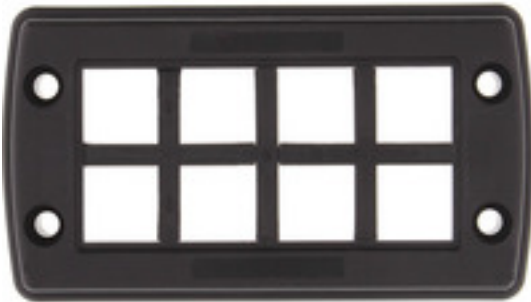

The frame, fabricated from a single piece, is quick and easy to assemble and consists of dimensionally stable, fibre-glass reinforced plastic. The captive foamed seal guarantees effective IP66 sealing in accordance with DIN EN 60529, even on painted and rough surfaces.

General ordering data

Type	CABTITE FR 16/8 BK SET
Order No.	2583740000
Version	Frame, Cabtite (cable entry system), Polyamide, glass fibre-reinforced, Deep black, Height: 70 mm, Width: 126 mm, Depth: 19.6 mm, -40 °C... 120 °C, IP54, IP65, IP66
GTIN (EAN)	4050118617146
Qty.	1 pc(s).

**Cabtite (cable entry system)
CABTITE FR 16/8 BK SET**

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Technical data
Dimensions and weights

Width	126 mm	Width (inches)	4.961 inch
Height	70 mm	Height (inches)	2.756 inch
Height of lowest version	19.6 mm	Depth	19.6 mm
Depth (inches)	0.772 inch	Mounting dimension - width	32 mm
Mounting dimension - height	103 mm	Net weight	42.48 g
Diameter	5.5 mm		

General information

Tightening torque	3 Nm	Opening width	46 mm
Opening length	91 mm	UL 94 flammability rating	V-0
Sealing element	2 large sealing elements or 4 small sealing elements or 1 large sealing element and 4 small sealing elements or 8 small sealing elements	Halogen	No
Silicone	No	Sealing	TPE
Material	Polyamide, glass fibre-reinforced		

Classifications

ETIM 6.0	EC002624	ETIM 7.0	EC002624
eClass 9.0	27-18-28-15	eClass 9.1	27-18-92-65
eClass 10.0	27-18-28-15		

Approvals

ROHS	Conform
------	---------

Downloads

Engineering Data	STEP
User Documentation	Cabtite Installation Instructions

Data sheet

**Cabtite (cable entry system)
CABTITE FR 16/8 BK SET**

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Drawings

