

ORDERING INFORMATION

Order code: 62022
 Description: F15T8/CW/PH/G13/STD
 UPC: 69549620223
 Case quantity: 25




Nominal length : 18 in. (457 mm) Dia. : 1 in. (26 mm)

PERFORMANCE DATA


Shape:	T8
Base:	G13 (Med Bipin)
Starting method:	Preheat Start (PH)
Wattage (W):	15
Colour temperature (K):	4 100
CRI:	60
Rated life on PS/PRS ¹ ballast:	
Based on a 3 hour start	24 000
Based on a 12 hour start	30 000
Initial lumens (lm):	850
Mean lumens (lm):	750
Nominal efficiency (lm/W):	57
TCLP compliant:	Yes
Phosphor composition:	Triphosphor
Nominal lamp operating frequency (Hz):	60
² Minimum starting temperature (°C):	-10

DIMENSIONS

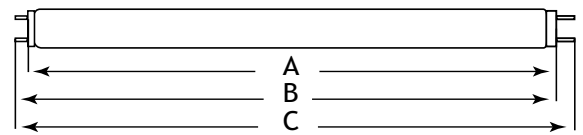

A Max Base face to base face	B Min / B Max Base face to end of opposite face pin	C Max End of base pin to the end of opposite end
17.22 in. 437.40 mm	17.40 in./17.50 in. 442.10 mm/444.50 mm	17.80 in. 451.60 mm

DIMENSIONS

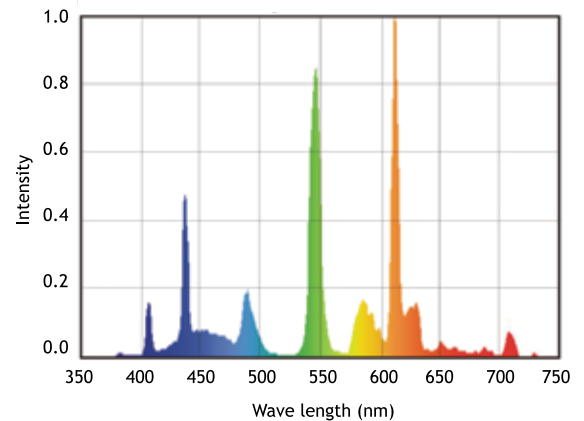

¹ The life rating indicated is based on 3 hour burning cycles under specified conditions and with ballast meeting ANSI specifications.

² The minimum starting temperature is a function of the ballast. The minimum starting temperature is based on a STANDARD brand T8 ballast.

