




## Table of Contents



Nylon Wallplates



Snap-On Wallplates

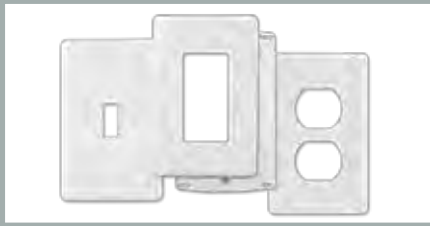

While-In-Use Weatherproof Covers



| Product  | Page |
|--|------|
| Features and Benefits                                      | N-2  |
| Snap-On Wallplates   | N-4  |
| Toggle Switch Wallplates                                   | N-6  |
| Duplex and Single Receptacle Wallplates                    | N-7  |
| Single Receptacle Wallplates                               | N-8  |
| Blank Wallplates   | N-9  |
| 347 Volt Wallplates  | N-10 |
| Decorator Wallplates                                       | N-11 |
| Combination Wallplates, 2-Gang                             | N-12 |
| Combination Wallplates, 3-Gang                             | N-14 |
| Combination Wallplates, 4- and 5-Gang                      | N-15 |
| Telephone and Coaxial Outlet Plates                        | N-16 |
| Jumbo, Metal Wallplates                                    | N-17 |
| Pre-Marked "EMERGENCY" and Barrel Key Switch Wallplates    | N-18 |
| Pre-Marked "ISOLATED GROUND" or "COMPUTER ONLY" Wallplates | N-19 |

| Product   | Page |
|---|------|
| Security Wallplates                                   | N-20 |
| Accessories and Selection Charts                      | N-21 |
| Weatherproof Plates for Receptacles                   | N-22 |
| Weatherproof Plates for Receptacles and Switches      | N-23 |
| Weatherproof Covers for Flanged Devices               | N-24 |
| Weatherproof Switch Plates, Covers and Locking Covers | N-25 |
| Heavy Duty Weatherproof Covers                        | N-26 |
| Weatherproof Covers                                   | N-27 |
| Metallic EXTRA DUTY® While-In-Use Covers              | N-28 |
| Non-Metallic While-In-Use Covers                      | N-29 |
| Screws and Accessories                                | N-30 |
| Wallplate Dimensions                                  | N-31 |
| Custom Metal Wallplates Configuration Chart           | N-32 |
|   | N-33 |



## Features and Benefits

### Nylon Wallplates

Our line of nylon wallplates features larger standard sized wallplates to provide extra coverage to hide rough box opening, improved aesthetics, greater strength, impact resistance, along with excellent cleanability in all different types of environments.

- Standard size is 1/8 inch larger to give you extra coverage to hide rough box openings. Also available in mid-size and pre-marked.
- Curved corners for improved aesthetics, for use in any application.
- Reinforcement ribs for extra strength.
- Captive screw feature holds mounting screw in place for quick and easy installation.
- High-impact, self-extinguishing nylon material, which is virtually unbreakable.
- Smooth, easy to clean finish is highly resistant to solvents and cleaning solutions, providing long life in the harshest environments.



Hubbell's standard sized wallplates are 1/8 inch larger to provide you that extra coverage to hide rough box openings. The depth is 1/4 inch so that it will comfortably fit over the device even on imperfect installations or on retrofit work.

### Nylon Wallplates



### Nylon Pre-Marked Wallplates



### Metal Wallplates



### Pre-Marked





## Features and Benefits

### Stainless Steel Wallplates

Provide solutions for a variety of industrial and commercial applications.


- Environments subjected to heavy abuse.
- The 302/304 type stainless steel wallplates are ideal for highly corrosive environments such as food processing, hospitals, static free requirements and more.  
Non-magnetic: 18.0% Chromium  
8.0% Nickel
- Standard commercial use.
- The 430 type stainless steel wallplates are aesthetically identical to the 302/304 type stainless steel wallplates and are best suited for environments where corrosion resistance is less critical.  
Magnetic: 17.0% Chromium  
Less than 0.5% Nickel

### Smooth Solid Brass

- Provides a plush appearance with the durability of metal.
- Finish is lacquer coated to inhibit oxidation.

### Anodized Aluminum

- Non-magnetic and corrosion resistance for a wide range of applications.
- Finish is lacquer coated to inhibit oxidation.

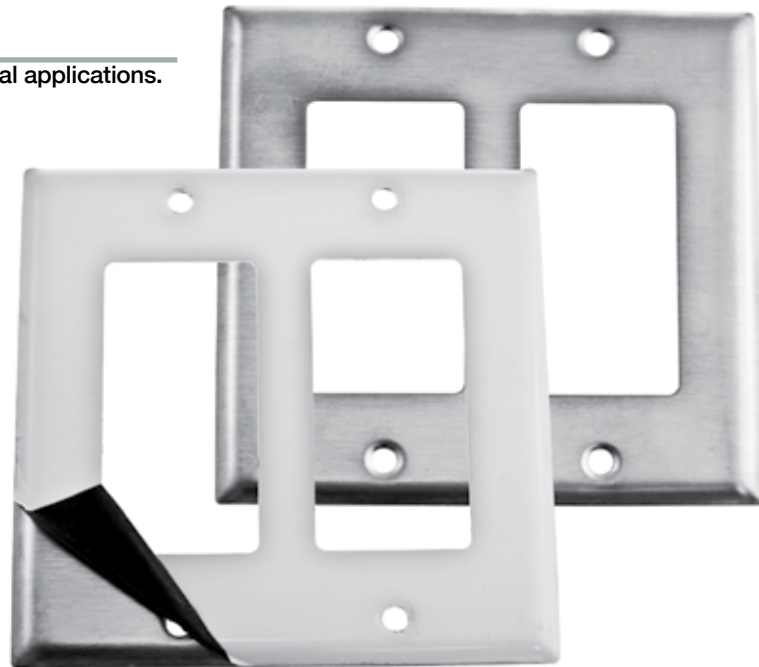

Protective plastic film helps to prevent scratches and damage.

### Extra-Duty Metallic While-in-Use Covers

These covers are designed for use whenever protection is required while an outlet is in use. Covers meet or exceed the extra-duty rating per UL 514D, and are NEMA 3R rated.

- Die-cast aluminum construction
- Powder coated “chip resistant” paint corrosion protection
- Unique plug management provision for securing device and cord



### 2014 National Electrical Code (NEC®) Requirement

#### 406.9 Receptacles in Damp or Wet Locations.

406.9 Receptacles in Damp or Wet Locations.

(B) Wet Locations.

(1) 15 and 20 Ampere Receptacles in a Wet Location. 15 and 20 ampere, 125 and 250 volt receptacles installed in a wet location shall have an enclosure that is weatherproof whether or not the attachment plug cap is inserted. An outlet box hood installed for this purpose shall be listed, and shall be identified as “extra-duty.” All 15 and 20 ampere, 125 and 250 volt nonlocking-type receptacles shall be listed weather-resistant type.

Exception: 15 and 20 ampere, 125 through 250 volt receptacles installed in a wet location and subject to routine high-pressure spray washing shall be permitted to have an enclosure that is weatherproof when the attachment plug is removed.

(2) Other Receptacles. All other receptacles installed in a wet location shall comply with (B)(2)(a) or (B)(2)(b).


(a) A receptacle installed in a wet location, where the product intended to be plugged into it is not attended while in use, shall have an enclosure that is weatherproof with the attachment plug cap inserted or removed.

(b) A receptacle installed in a wet location where the product intended to be plugged into it will be attended while in use (e.g., portable tools) shall have an enclosure that is weatherproof when the attachment plug is removed.



## More Style In a Snap

- Snap-on wallplates offer a clean, elegant look
- Installs in seconds
- Cover snaps into place
- Meets UL and CSA standards

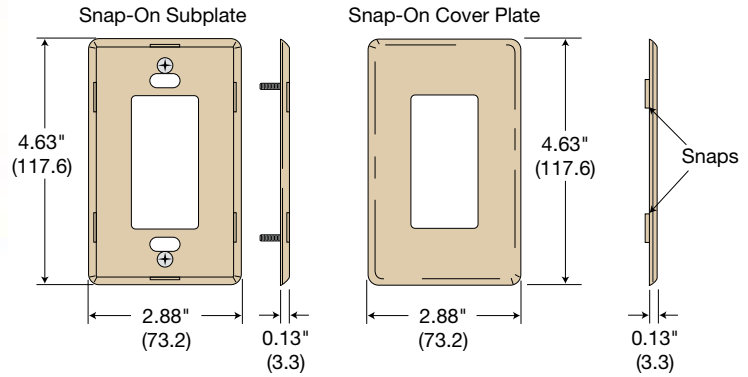


## Snap-On Wallplates

| Description         |                  | Color                          | Decorator Catalog Number                      | Toggle Catalog Number             |
|---------------------|------------------|--------------------------------|---|-----------------------------------|
| 1-Gang, 1-Decorator | 1-Gang, 1-Toggle | Ivory<br>Light Almond<br>White | <b>RCW1I</b><br><b>RCW1LA</b><br><b>RCW1W</b> | <b>RFW1I</b><br>-<br><b>RFW1W</b> |
| 2-Gang, 2-Decorator | 2-Gang, 2-Toggle | Ivory<br>Light Almond<br>White | <b>RCW2I</b><br><b>RCW2LA</b><br><b>RCW2W</b> | <b>RFW2I</b><br>-<br><b>RFW2W</b> |
| 3-Gang, 3-Decorator | 3-Gang, 3-Toggle | Ivory<br>Light Almond<br>White | <b>RCW3I</b><br><b>RCW3LA</b><br><b>RCW3W</b> | <b>RFW3I</b><br>-<br><b>RFW3W</b> |
| 4-Gang, 4-Decorator |                  | Ivory<br>Light Almond<br>White | <b>RCW4I</b><br><b>RCW4LA</b><br><b>RCW4W</b> | -<br>-<br>-                       |
| 5-Gang, 5-Decorator |                  | Ivory<br>Light Almond<br>White | <b>RCW5I</b><br><b>RCW5LA</b><br><b>RCW5W</b> | -<br>-<br>-                       |
| 6-Gang, 6-Decorator |                  | Ivory<br>Light Almond<br>White | <b>RCW6I</b><br><b>RCW6LA</b><br><b>RCW6W</b> | -<br>-<br>-                       |

Dimensions in Inches (mm)

## New and Improved Snap

- Clean, elegant look
- No visible screws
- Snap-on cover plate completely covers sub-plate eliminating dirt build-up around the edges
- Snap-on cover plate hides any paint or scratches on sub-plate caused during installation
- Appearance is consistent with other Hubbell wallplates
- Meets UL and CSA standards

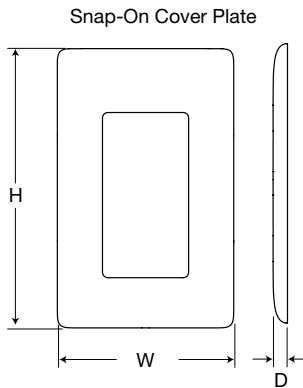

| Gang | Height (H)    | Width (W)     | Depth (D)  |
|------|---------------|---------------|------------|
| 1    | 4.75" (120.6) | 3.00" (76.2)  | .25" (6.2) |
| 2    | 4.75" (120.6) | 4.81" (122.2) | .25" (6.2) |
| 3    | 4.75" (120.6) | 6.62" (168.2) | .25" (6.2) |
| 4    | 4.75" (120.6) | 8.44" (214.3) | .25" (6.2) |

## Snap-On Wallplates










| Description         |                  | Color                          | Decorator Catalog Number                              | Toggle Catalog Number                           |
|---------------------|------------------|--------------------------------|---|---|
| 1-Gang, 1-Decorator | 1-Gang, 1-Toggle | Ivory<br>Light Almond<br>White | <b>NPS261</b><br><b>NPS261LA</b><br><b>NPS261W</b>    | <b>NPS11</b><br><b>NPS1LA</b><br><b>NPS1W</b>   |
| 2-Gang, 2-Decorator | 2-Gang, 2-Toggle | Ivory<br>Light Almond<br>White | <b>NPS2621</b><br><b>NPS2621LA</b><br><b>NPS2621W</b> | <b>NPS21</b><br><b>NPS21LA</b><br><b>NPS21W</b> |
| 3-Gang, 3-Decorator | 3-Gang, 3-Toggle | Ivory<br>Light Almond<br>White | <b>NPS2631</b><br><b>NPS2631LA</b><br><b>NPS2631W</b> | <b>NPS31</b><br><b>NPS31LA</b><br><b>NPS31W</b> |
| 4-Gang, 4-Decorator |                  | Ivory<br>Light Almond<br>White | <b>NPS2641</b><br><b>NPS2641LA</b><br><b>NPS2641W</b> | -<br>-<br>-                                     |
| 1-Gang, 1-Duplex    |                  | Ivory<br>Light Almond<br>White | <b>NPS81</b><br><b>NPS81LA</b><br><b>NPS81W</b>       | -<br>-<br>-                                     |

Dimensions in Inches (mm)





## Toggle Switch Wallplates

| Description  | Color   | Nylon Standard | Nylon Mid-Size | Nylon Jumbo    | Material      | Metal Catalog Number |
|--|---|----------------|----------------|----------------|---------------|----------------------|
| <br>1-Gang, 1-Toggle   | Almond  | <b>NP1AL</b>   | <b>NPJ1AL</b>  | -              | Aluminum      | <b>SA1</b>           |
|  | Black   | <b>NP1BK</b>   | <b>NPJ1BK</b>  | -              | Brass         | <b>SB1</b>           |
|  | Brown   | <b>NP1</b>     | <b>NPJ1</b>    | -              | Brass Plated  | <b>SBP1</b>          |
|  | Gray  | <b>NP1GY</b>   | <b>NPJ1GY</b>  | -              | Chrome        | <b>SCH1</b>          |
|  | Ivory   | <b>NP1I</b>    | <b>NPJ1I</b>   | <b>NPJJ1I</b>  | S/S 302/304   | <b>SS1</b>           |
|  | Light Almond  | <b>NP1LA</b>   | <b>NPJ1LA</b>  | <b>NPJJ1LA</b> | S/S 430       | <b>SS1L</b>          |
|  | Office White  | <b>NP1OW</b>   | <b>NPJ1OW</b>  | -              | Steel, Almond | <b>SP1AL*</b>        |
|  | Red   | <b>NP1R</b>    | <b>NPJ1R</b>   | -              | Steel, Gray   | <b>SP1G*</b>         |
|  | White   | <b>NP1W</b>    | <b>NPJ1W</b>   | <b>NPJJ1W</b>  |               |                      |
|  | <br>2-Gang, 2-Toggle  | Almond         | <b>NP2AL</b>   | <b>NPJ2AL</b>  | -             | Aluminum             |
| Black  |   | <b>NP2BK</b>   | <b>NPJ2BK</b>  | -              | Brass         | <b>SB2</b>           |
| Brown  |   | <b>NP2</b>     | <b>NPJ2</b>    | -              | Brass Plated  | <b>SBP2</b>          |
| Gray   |   | <b>NP2GY</b>   | <b>NPJ2GY</b>  | -              | Chrome        | <b>SCH2</b>          |
| Ivory  |   | <b>NP2I</b>    | <b>NPJ2I</b>   | <b>NPJJ2I</b>  | S/S 302/304   | <b>SS2</b>           |
| Light Almond   |   | <b>NP2LA</b>   | <b>NPJ2LA</b>  | <b>NPJJ2LA</b> | S/S 430       | <b>SS2L</b>          |
| Office White   |   | <b>NP2OW</b>   | <b>NPJ2OW</b>  | -              | Steel, Almond | <b>SP2AL*</b>        |
| Red  |   | <b>NP2R</b>    | <b>NPJ2R</b>   | -              | Steel, Gray   | <b>SP2G*</b>         |
| White  |   | <b>NP2W</b>    | <b>NPJ2W</b>   | <b>NPJJ2W</b>  |               |                      |
| <br>3-Gang, 3-Toggle   |   | Almond         | <b>NP3AL</b>   | <b>NPJ3AL</b>  | -             | Aluminum             |
|  | Black   | <b>NP3BK</b>   | <b>NPJ3BK</b>  | -              | Brass         | <b>SB3</b>           |
|  | Brown   | <b>NP3</b>     | <b>NPJ3</b>    | -              | Brass Plated  | <b>SBP3</b>          |
|  | Gray  | <b>NP3GY</b>   | <b>NPJ3GY</b>  | -              | Chrome        | <b>SCH3</b>          |
|  | Ivory   | <b>NP3I</b>    | <b>NPJ3I</b>   | -              | S/S 302/304   | <b>SS3</b>           |
|  | Light Almond  | <b>NP3LA</b>   | <b>NPJ3LA</b>  | -              | S/S 430       | <b>SS3L</b>          |
|  | Office White  | <b>NP3OW</b>   | <b>NPJ3OW</b>  | -              | Steel, Almond | <b>SP3AL*</b>        |
|  | Red   | -              | <b>NPJ3R</b>   | -              |               |                      |
|  | White   | <b>NP3W</b>    | <b>NPJ3W</b>   | -              |               |                      |
|  | <br>4-Gang, 4-Toggle | Black          | <b>NP4BK</b>   | <b>NPJ4BK</b>  | -             | Aluminum             |
| Brown  |   | <b>NP4</b>     | <b>NPJ4</b>    | -              | Brass         | <b>SB4</b>           |
| Gray   |   | <b>NP4GY</b>   | <b>NPJ4GY</b>  | -              | Brass Plated  | <b>SBP4</b>          |
| Ivory  |   | <b>NP4I</b>    | <b>NPJ4I</b>   | -              | Chrome        | ①                    |
| Light Almond   |   | <b>NP4LA</b>   | <b>NPJ4LA</b>  | -              | S/S 302/304   | <b>SS4</b>           |
| Office White   |   | <b>NP4OW</b>   | <b>NPJ4OW</b>  | -              | S/S 430       | <b>SS4L</b>          |
| White  |   | <b>NP4W</b>    | <b>NPJ4W</b>   | -              | Steel, Almond | <b>SP4AL*</b>        |
|  |   |                |                |                |               |                      |
| <br>5-Gang, 5-Toggle | Black   | <b>NP5BK</b>   | -              | -              | Aluminum      | ①                    |
|  | Brown   | <b>NP5</b>     | -              | -              | Brass         | <b>SB5</b>           |
|  | Gray  | <b>NP5GY</b>   | -              | -              | Brass Plated  | ①                    |
|  | Ivory   | <b>NP5I</b>    | -              | -              | Chrome        | ①                    |
|  | Light Almond  | <b>NP5LA</b>   | -              | -              | S/S 302/304   | <b>SS5</b>           |
|  | White   | <b>NP5W</b>    | -              | -              | S/S 430       | -                    |
|  |   |                |                | Steel, Almond  | <b>SP5AL*</b> |                      |
| <br>6-Gang, 6-Toggle | Brown   | <b>NP6</b>     | -              | -              | Aluminum      | ①                    |
|  | Gray  | <b>NP6GY</b>   | -              | -              | Brass         | <b>SB6</b>           |
|  | Ivory   | <b>NP6I</b>    | -              | -              | Brass Plated  | ①                    |
|  | Light Almond  | <b>NP6LA</b>   | -              | -              | Chrome        | ①                    |
|  | White   | <b>NP6W</b>    | -              | -              | S/S 302/304   | <b>SS6</b>           |
|  |   |                |                | S/S 430        | -             |                      |
|  |   |                |                | Steel, Almond  | <b>SP6AL*</b> |                      |
| <br>7-Gang, 7-Toggle | Almond  | -              | -              | -              | Aluminum      | ①                    |
|  | Brown   | -              | -              | -              | Brass         | ①                    |
|  | Gray  | -              | -              | -              | Brass Plated  | ①                    |
|  | Ivory   | -              | -              | -              | Chrome        | ①                    |
|  | White   | -              | -              | -              | S/S 302/304   | <b>SS607</b>         |
|  |   |                |                | S/S 430        | -             |                      |
| <br>8-Gang, 8-Toggle | Almond  | -              | -              | -              | Aluminum      | ①                    |
|  | Brown   | -              | -              | -              | Brass         | ①                    |
|  | Gray  | -              | -              | -              | Brass Plated  | ①                    |
|  | Ivory   | -              | -              | -              | Chrome        | ①                    |
|  | White   | -              | -              | -              | S/S 302/304   | <b>SS608</b>         |
|  |   |                |                | S/S 430        | -             |                      |
| <br>2-Gang, 1-Toggle | Almond  | -              | -              | -              | Aluminum      | -                    |
|  | Brown   | -              | -              | -              | Brass         | -                    |
|  | Gray  | -              | -              | -              | Brass Plated  | -                    |
|  | Ivory   | -              | -              | -              | Chrome        | -                    |
|  | White   | -              | -              | -              | S/S 302/304   | <b>SS740</b>         |
|  |   |                |                | S/S 430        | -             |                      |

Note: All standard and mid-size nylon wallplates feature pre-inserted captive screws for faster assembly, up to 6-gang.

① Available as a custom wallplate, see pages N-32 to N-36. Consult custom wallplates section for additional openings and combinations.






\*Powder coat paint finish.

Dimensions in Inches (mm)




# Wallplates and Covers



## Duplex Receptacle Wallplates

| Description   | Color   | Nylon Standard | Nylon Mid-Size | Nylon Jumbo    | Material       | Metal Catalog Number |
|---|---|----------------|----------------|----------------|----------------|----------------------|
| <br>1-Gang, 1-Duplex   | Almond  | <b>NP8AL</b>   | <b>NPJ8AL</b>  | -              | Aluminum       | <b>SA8</b>           |
|   | Black   | <b>NP8BK</b>   | <b>NPJ8BK</b>  | -              | Brass          | <b>SB8</b>           |
|   | Blue  | -              | <b>NPJ8BL</b>  | -              | Brass Plated   | <b>SBP8</b>          |
|   | Brown   | <b>NP8</b>     | <b>NPJ8</b>    | -              | Chrome         | <b>SCH8</b>          |
|   | Gray  | <b>NP8GY</b>   | <b>NPJ8GY</b>  | -              | S/S 302/304    | <b>SS8</b>           |
|   | Ivory   | <b>NP8I</b>    | <b>NPJ8I</b>   | <b>NPJJ8I</b>  | S/S 430        | <b>SS8L</b>          |
|   | Light Almond  | <b>NP8LA</b>   | <b>NPJ8LA</b>  | <b>NPJJ8LA</b> | Steel, Almond  | <b>SP8AL*</b>        |
|   | Office White  | <b>NP8OW</b>   | <b>NPJ8OW</b>  | -              | Steel, Gray    | <b>SP8G*</b>         |
|   | Orange  | <b>NP8OR</b>   | -              | -              |                |                      |
|   | Red   | <b>NP8R</b>    | <b>NPJ8R</b>   | -              |                |                      |
|   | White   | <b>NP8W</b>    | <b>NPJ8W</b>   | <b>NPJJ8W</b>  |                |                      |
|   | <br>2-Gang, 2-Duplex | Black          | <b>NP82BK</b>  | <b>NPJ82BK</b> | -              | Aluminum             |
| Brown   |   | <b>NP82</b>    | <b>NPJ82</b>   | -              | Brass          | <b>SB82</b>          |
| Gray  |   | <b>NP82GY</b>  | <b>NPJ82GY</b> | -              | Brass Plated   | <b>SBP82</b>         |
| Ivory   |   | <b>NP82I</b>   | <b>NPJ82I</b>  | -              | Chrome         | <b>SCH82</b>         |
| Light Almond  |   | <b>NP82LA</b>  | <b>NPJ82LA</b> | -              | S/S 302/304    | <b>SS82</b>          |
| Office White  |   | <b>NP82OW</b>  | <b>NPJ82OW</b> | -              | S/S 430        | <b>SS82L</b>         |
| Orange  |   | <b>NP82OR</b>  | -              | -              | Steel, Almond  | <b>SP82AL*</b>       |
| Red   |   | <b>NP82R</b>   | <b>NPJ82R</b>  | -              | Steel, Gray    | <b>SP82G*</b>        |
| White   |   | <b>NP82W</b>   | <b>NPJ82W</b>  | -              |                |                      |
|   |   |                |                |                |                |                      |
| <br>3-Gang, 3-Duplex   | Brown   | <b>NP83</b>    | -              | -              | Aluminum       | ①                    |
|   | Ivory   | <b>NP83I</b>   | -              | -              | Brass          | ①                    |
|   | White   | <b>NP83W</b>   | -              | -              | Brass Plated   | ①                    |
|   |   |                |                |                | Chrome         | ①                    |
|   |   |                |                | S/S 302/304    | <b>SS83</b>    |                      |
|   |   |                |                | S/S 430        | -              |                      |
|   |   |                |                | Steel, Almond  | <b>SP83AL*</b> |                      |
| <br>4-Gang, 4-Duplex  | Brown   | <b>NP84</b>    | -              | -              | Aluminum       | ①                    |
|   | Ivory   | <b>NP84I</b>   | -              | -              | Brass          | ①                    |
|   | White   | <b>NP84W</b>   | -              | -              | Brass Plated   | ①                    |
|   |   |                |                |                | Chrome         | ①                    |
|   |   |                |                | S/S 302/304    | <b>SS84</b>    |                      |
|   |   |                |                | S/S 430        | -              |                      |
| <br>2-Gang, 1-Duplex | -   | -              | -              | -              | Brass          | -                    |
|   | -   | -              | -              | -              | Brass Plated   | -                    |
|   | -   | -              | -              | -              | Chrome         | -                    |
|   | -   | -              | -              | -              | S/S 302/304    | <b>SS748</b>         |
|   | -   | -              | -              | -              | S/S 430        | -                    |

## Single 15/20A Straight Blade or 15A Twist-Lock® Receptacle Wallplates

| Description   | Color        | Nylon Standard | Nylon Mid-Size | Nylon Jumbo | Material      | Metal Catalog Number |
|---|--------------|----------------|----------------|-------------|---------------|----------------------|
| <br>1-Gang, 1-Single 1.40 in. (35.6) Dia. Hole | Black        | <b>NP7BK</b>   | <b>NPJ7BK</b>  | -           | Aluminum      | <b>SA7</b>           |
|   | Brown        | <b>NP7</b>     | <b>NPJ7</b>    | -           | Brass         | <b>SB7</b>           |
|   | Gray         | <b>NP7GY</b>   | <b>NPJ7GY</b>  | -           | Brass Plated  | <b>SBP7</b>          |
|   | Ivory        | <b>NP7I</b>    | <b>NPJ7I</b>   | -           | Chrome        | <b>SCH7</b>          |
|   | Light Almond | <b>NP7LA</b>   | <b>NPJ7LA</b>  | -           | S/S 302/304   | <b>SS7</b>           |
|   | Office White | <b>NP7OW</b>   | <b>NPJ7OW</b>  | -           | S/S 430       | <b>SS7L</b>          |
|   | Red          | <b>NP7R</b>    | <b>NPJ7R</b>   | -           | Steel, Almond | <b>SP7AL*</b>        |
|   | White        | <b>NP7W</b>    | <b>NPJ7W</b>   | -           | Steel, Gray   | <b>SP7G*</b>         |
|   |              |                |                |             |               |                      |
| <br>2-Gang, 1-Single 1.40 in. (35.6) Dia. Hole | -            | -              | -              | -           | Aluminum      | -                    |
|   | -            | -              | -              | -           | Brass         | -                    |
|   | -            | -              | -              | -           | Brass Plated  | -                    |
|   | -            | -              | -              | -           | Chrome        | -                    |
|   | -            | -              | -              | -           | S/S 302/304   | <b>SS747</b>         |
|   | -            | -              | -              | -           | S/S 430       | -                    |
| <br>2-Gang, 2-Single 1.40 in. (35.6) Dia. Hole | -            | -              | -              | -           | Aluminum      | ①                    |
|   | -            | -              | -              | -           | Brass         | ①                    |
|   | -            | -              | -              | -           | Brass Plated  | ①                    |
|   | -            | -              | -              | -           | Chrome        | ①                    |
|   | -            | -              | -              | -           | S/S 302/304   | <b>SS72</b>          |
|   | -            | -              | -              | -           | S/S 430       | -                    |

Note: All standard and mid-size nylon wallplates feature pre-inserted captive screws for faster assembly, up to 6-gang.






① Available as a custom wallplate, see pages N-32 to N-36. Consult custom wallplates section for additional openings and combinations.

\*Powder coat paint finish.







Dimensions in Inches (mm)



## Single 20/30A Twist-Lock® Receptacle Wallplates

| Description  | Color        | Nylon Standard | Nylon Mid-Size | Material     | Metal Catalog Number |
|--|--------------|----------------|----------------|--------------|----------------------|
|  1-Gang, 1-Single<br>1.60 in. (40.6) Dia. Hole | Black        | <b>NP720BK</b> | -              | Aluminum     | <b>SA720</b>         |
|  | Brown        | <b>NP720</b>   | -              | Brass        | <b>SB720</b>         |
|  | Gray         | <b>NP720GY</b> | -              | Brass Plated | ①                    |
|  | Ivory        | <b>NP720I</b>  | -              | Chrome       | ①                    |
|  | Office White | <b>NP720OW</b> | -              | S/S 302/304  | <b>SS720</b>         |
|  | Red          | <b>NP720R</b>  | -              | S/S 430      | -                    |
|  1-Gang, 1-Single<br>1.74 in. (44.2) Dia. Hole | -            | -              | -              | Aluminum     | -                    |
|  | -            | -              | -              | Brass        | -                    |
|  | -            | -              | -              | Brass Plated | -                    |
|  | -            | -              | -              | Chrome       | -                    |
|  | -            | -              | -              | S/S 302/304  | <b>SS725</b>         |
|  | -            | -              | -              | -            | -                    |
|  2-Gang, 1-Single<br>1.60 in. (40.6) Dia. Hole | -            | -              | -              | Aluminum     | -                    |
|  | -            | -              | -              | Brass        | -                    |
|  | -            | -              | -              | Brass Plated | -                    |
|  | -            | -              | -              | Chrome       | -                    |
|  | -            | -              | -              | S/S 302/304  | <b>SS749</b>         |
|  | -            | -              | -              | -            | -                    |
|  3-Gang, 2-Single<br>1.60 in. (40.6) Dia. Hole | -            | -              | -              | Aluminum     | ①                    |
|  | -            | -              | -              | Brass        | ①                    |
|  | -            | -              | -              | Brass Plated | ①                    |
|  | -            | -              | -              | Chrome       | ①                    |
|  | -            | -              | -              | S/S 302/304  | <b>SS320</b>         |
|  | -            | -              | -              | -            | -                    |
|  3-Gang, 2-Single<br>1.74 in. (44.2) Dia. Hole | -            | -              | -              | Aluminum     | -                    |
|  | -            | -              | -              | Brass        | -                    |
|  | -            | -              | -              | Brass Plated | -                    |
|  | -            | -              | -              | Chrome       | -                    |
|  | -            | -              | -              | S/S 302/304  | <b>SS330</b>         |
|  | -            | -              | -              | -            | -                    |

## Single Receptacle Wallplates

| Description  | Color | Nylon Standard | Nylon Mid-Size  | Material     | Metal Catalog Number |
|--|-------|----------------|-----------------|--------------|----------------------|
|  1-Gang, 1-Single<br>1.97 in. (50.0) Dia. Hole | -     | -              | -               | Aluminum     | -                    |
|  | -     | -              | -               | Brass        | -                    |
|  | -     | -              | -               | Chrome       | -                    |
|  | -     | -              | -               | S/S 302/304  | <b>SS737</b>         |
|  | -     | -              | -               | S/S 430      | -                    |
|  1-Gang, 1-Single<br>2.16 in. (54.9) Dia. Hole | Black | <b>NP724BK</b> | <b>NPJ724BK</b> | Aluminum     | <b>SA723</b>         |
|  | Brown | <b>NP724</b>   | <b>NPJ724</b>   | Brass        | ①                    |
|  | Gray  | <b>NP724GY</b> | <b>NPJ724GY</b> | Brass Plated | ①                    |
|  | Ivory | <b>NP724I</b>  | <b>NPJ724I</b>  | Chrome       | <b>SCH723</b>        |
|  | White | <b>NP724W</b>  | <b>NPJ724W</b>  | S/S 302/304  | <b>SS723</b>         |
|  | -     | -              | -               | S/S 430      | <b>SS723L</b>        |
|  2-Gang, 1-Single<br>2.16 in. (54.9) Dia. Hole | -     | -              | -               | Aluminum     | -                    |
|  | -     | -              | -               | Brass        | -                    |
|  | -     | -              | -               | Chrome       | <b>SCH702</b>        |
|  | -     | -              | -               | S/S 302/304  | <b>SS702</b>         |
|  | -     | -              | -               | S/S 430      | -                    |
|  2-Gang, 1-Single<br>2.16 in. (54.9) Dia. Hole | Black | <b>NP703BK</b> | <b>NPJ703BK</b> | Aluminum     | -                    |
|  | Brown | <b>NP703</b>   | <b>NPJ703</b>   | Brass        | -                    |
|  | Gray  | <b>NP703GY</b> | <b>NPJ703GY</b> | Brass Plated | -                    |
|  | Ivory | <b>NP703I</b>  | <b>NPJ703I</b>  | Chrome       | -                    |
|  | White | <b>NP703W</b>  | <b>NPJ703W</b>  | S/S 302/304  | <b>SS703</b>         |
|  | -     | -              | -               | S/S 430      | <b>SS703L</b>        |
|  2-Gang, 1-Single<br>2.48 in. (63.0) Dia. Hole | -     | -              | -               | Aluminum     | -                    |
|  | -     | -              | -               | Brass        | -                    |
|  | -     | -              | -               | Chrome       | -                    |
|  | -     | -              | -               | S/S 302/304  | <b>SS701</b>         |
|  | -     | -              | -               | S/S 430      | -                    |
|  2-Gang, 1-Single<br>2.66 in. (67.6) Dia. Hole | -     | -              | -               | Aluminum     | -                    |
|  | -     | -              | -               | Brass        | -                    |
|  | -     | -              | -               | Chrome       | -                    |
|  | -     | -              | -               | S/S 302/304  | <b>SS716</b>         |
|  | -     | -              | -               | S/S 430      | -                    |

Note: All standard and mid-size nylon wallplates feature pre-inserted captive screws for faster assembly, up to 6-gang.

① Available as a custom wallplate, see pages N-32 to N-36. Consult custom wallplates section for additional openings and combinations.









Dimensions in Inches (mm)



# Wallplates and Covers



## Blank Wallplates, Box Mount and Strap Mount

| Description  | Color         | Nylon Standard | Nylon Mid-Size | Nylon Jumbo     | Material      | Metal Catalog Number |
|--|---------------|----------------|----------------|-----------------|---------------|----------------------|
|  1-Gang,<br>1-Blank,<br>Box Mount     | Almond        | <b>NP13AL</b>  | <b>NPJ13AL</b> | -               | Aluminum      | <b>SA13A</b>         |
|  | Black         | <b>NP13BK</b>  | <b>NPJ13BK</b> | -               | Brass         | <b>SB13</b>          |
|  | Brown         | <b>NP13</b>    | <b>NPJ13</b>   | -               | Brass Plated  | <b>SBP13</b>         |
|  | Gray          | <b>NP13GY</b>  | <b>NPJ13GY</b> | -               | Chrome        | <b>SCH13</b>         |
|  | Ivory         | <b>NP13I</b>   | <b>NPJ13I</b>  | <b>NPJJ13I</b>  | S/S 302/304   | <b>SS13</b>          |
|  | Light Almond  | <b>NP13LA</b>  | <b>NPJ13LA</b> | <b>NPJJ13LA</b> | S/S 430       | <b>SS13L</b>         |
|  | Office White  | <b>NP13OW</b>  | <b>NPJ13OW</b> | -               | Steel, Almond | <b>SP14BAL*</b>      |
|  | White         | <b>NP13W</b>   | <b>NPJ13W</b>  | <b>NPJJ13W</b>  | Steel, Gray   | <b>SP14BG*</b>       |
|  2-Gang,<br>2-Blank,<br>Box Mount     | Almond        | <b>NP23AL</b>  | <b>NPJ23AL</b> | -               | Aluminum      | <b>SA23</b>          |
|  | Black         | <b>NP23BK</b>  | -              | -               | Brass         | <b>SB23</b>          |
|  | Brown         | <b>NP23</b>    | <b>NPJ23</b>   | -               | Brass Plated  | ①                    |
|  | Gray          | <b>NP23GY</b>  | -              | -               | Chrome        | <b>SCH23</b>         |
|  | Ivory         | <b>NP23I</b>   | <b>NPJ23I</b>  | -               | S/S 302/304   | <b>SS23</b>          |
|  | Light Almond  | <b>NP23LA</b>  | <b>NPJ23LA</b> | -               | S/S 430       | <b>SS23L</b>         |
|  | White         | <b>NP23W</b>   | <b>NPJ23W</b>  | -               | Steel, Almond | <b>SP24BAL*</b>      |
|  | Steel, Gray   | -              | -              | -               | Steel, Gray   | <b>SP24BG*</b>       |
|  3-Gang,<br>3-Blank,<br>Box Mount     | Brown         | <b>NP33</b>    | -              | -               | Aluminum      | ①                    |
|  | Ivory         | <b>NP33I</b>   | -              | -               | Brass         | ①                    |
|  | White         | <b>NP33W</b>   | -              | -               | Brass Plated  | ①                    |
|  | Chrome        | -              | -              | -               | Chrome        | ①                    |
|  | S/S 302/304   | -              | -              | -               | S/S 302/304   | <b>SS33</b>          |
|  | S/S 430       | -              | -              | -               | S/S 430       | -                    |
|  | Steel, Almond | -              | -              | -               | Steel, Almond | <b>SP34BAL*</b>      |
|  | Steel, Gray   | -              | -              | -               | Steel, Gray   | -                    |
|  4-Gang,<br>4-Blank,<br>Box Mount     | Brown         | <b>NP43</b>    | -              | -               | Aluminum      | ①                    |
|  | Ivory         | <b>NP43I</b>   | -              | -               | Brass         | ①                    |
|  | White         | <b>NP43W</b>   | -              | -               | Brass Plated  | ①                    |
|  | Chrome        | -              | -              | -               | Chrome        | ①                    |
|  | S/S 302/304   | -              | -              | -               | S/S 302/304   | <b>SS43</b>          |
| S/S 430  | -             | -              | -              | S/S 430         | -             |                      |
|  1-Gang,<br>1-Blank,<br>Strap Mount | Black         | <b>NP14BK</b>  | -              | -               | Aluminum      | ①                    |
|  | Brown         | <b>NP14</b>    | -              | -               | Brass         | <b>SB14</b>          |
|  | Gray          | <b>NP14GY</b>  | -              | -               | Brass Plated  | ①                    |
|  | Ivory         | <b>NP14I</b>   | -              | -               | Chrome        | ①                    |
|  | Office White  | <b>NP14OW</b>  | -              | -               | S/S 302/304   | <b>SS14</b>          |
|  | Red           | <b>NP14R</b>   | -              | -               | S/S 430       | <b>SS14L</b>         |
|  | White         | <b>NP14W</b>   | -              | -               | Steel, Almond | <b>SP14AL*</b>       |
|  | Steel, Gray   | -              | -              | -               | Steel, Gray   | <b>SP14G*</b>        |
|  2-Gang,<br>2-Blank,<br>Strap Mount | Black         | <b>NP24BK</b>  | -              | -               | Aluminum      | ①                    |
|  | Brown         | <b>NP24</b>    | -              | -               | Brass         | ①                    |
|  | Gray          | <b>NP24GY</b>  | -              | -               | Brass Plated  | ①                    |
|  | Ivory         | <b>NP24I</b>   | -              | -               | Chrome        | ①                    |
|  | Office White  | <b>NP24OW</b>  | -              | -               | S/S 302/304   | <b>SS24</b>          |
|  | Red           | <b>NP24R</b>   | -              | -               | S/S 430       | <b>SS24L</b>         |
|  | White         | <b>NP24W</b>   | -              | -               | Steel, Almond | <b>SP24AL*</b>       |
| Steel, Gray  | -             | -              | -              | Steel, Gray     | <b>SP24G*</b> |                      |
|  3-Gang,<br>3-Blank,<br>Strap Mount | Brown         | <b>NP34</b>    | -              | -               | Aluminum      | ①                    |
|  | Ivory         | <b>NP34I</b>   | -              | -               | Brass         | ①                    |
|  | White         | <b>NP34W</b>   | -              | -               | Brass Plated  | ①                    |
|  | Chrome        | -              | -              | -               | Chrome        | ①                    |
|  | S/S 302/304   | -              | -              | -               | S/S 302/304   | <b>SS34</b>          |
|  | S/S 430       | -              | -              | -               | S/S 430       | -                    |
|  | Steel, Almond | -              | -              | -               | Steel, Almond | <b>SP34AL*</b>       |
|  | Steel, Gray   | -              | -              | -               | Steel, Gray   | -                    |
|  4-Gang, 4-Blank,<br>Strap Mount    | Brown         | <b>NP44</b>    | -              | -               | Aluminum      | ①                    |
|  | Ivory         | <b>NP44I</b>   | -              | -               | Brass         | ①                    |
|  | White         | <b>NP44W</b>   | -              | -               | Brass Plated  | ①                    |
|  | Chrome        | -              | -              | -               | Chrome        | ①                    |
| S/S 302/304  | -             | -              | -              | S/S 302/304     | <b>SS44</b>   |                      |
| S/S 430  | -             | -              | -              | S/S 430         | -             |                      |

Note: All standard and mid-size nylon wallplates feature pre-inserted captive screws for faster assembly, up to 6-gang.







① Available as a custom wallplate, see pages N-32 to N-36. Consult custom wallplates section for additional openings and combinations.

\*Powder coat paint finish.




Dimensions in Inches (mm)



## 347 Volt Toggle Wallplates with 2.25" (57.2) Spacing Between Gangs, Stamped "347V"

| Description   | Color | Nylon Catalog Number | Material  | Metal Catalog Number                 |
|---|-------|----------------------|---|--------------------------------------|
| 1-Gang, 1-Toggle<br>2.25 in. (57.2) Spacing<br>   | -     | -                    | Aluminum<br>Brass<br>Brass Plated<br>Chrome<br>S/S 302/304<br>S/S 430 | -<br>-<br>-<br>-<br><b>SS1C</b><br>- |
| 2-Gang, 2-Toggle<br>2.25 in. (57.2) Spacing<br>   | -     | -                    | Aluminum<br>Brass<br>Brass Plated<br>Chrome<br>S/S 302/304<br>S/S 430 | -<br>-<br>-<br>-<br><b>SS2C</b><br>- |
| 3-Gang, 3-Toggle<br>2.25 in. (57.2) Spacing<br>   | -     | -                    | Aluminum<br>Brass<br>Brass Plated<br>Chrome<br>S/S 302/304<br>S/S 430 | -<br>-<br>-<br>-<br><b>SS3C</b><br>- |
| 4-Gang, 4-Toggle<br>2.25 in. (57.2) Spacing<br>   | -     | -                    | Aluminum<br>Brass<br>Brass Plated<br>Chrome<br>S/S 302/304<br>S/S 430 | -<br>-<br>-<br>-<br><b>SS4C</b><br>- |
| 5-Gang, 5-Toggle<br>2.25 in. (57.2) Spacing<br>  | -     | -                    | Aluminum<br>Brass<br>Brass Plated<br>Chrome<br>S/S 302/304<br>S/S 430 | -<br>-<br>-<br>-<br><b>SS5C</b><br>- |
| 6-Gang, 6-Toggle<br>2.25 in. (57.2) Spacing<br> | -     | -                    | Aluminum<br>Brass<br>Brass Plated<br>Chrome<br>S/S 302/304<br>S/S 430 | -<br>-<br>-<br>-<br><b>SS6C</b><br>- |

## 347 Volt Decorator Wallplates

| Description   | Color                           | Nylon Catalog Number   | Material  | Metal Catalog Number       |
|---|---------------------------------|--|---|----------------------------|
| 1-Gang, 1-Decorator<br> | Black<br>Gray<br>Ivory<br>White | <b>HPS1347BK</b><br><b>HPS1347GY</b><br><b>HPS1347I</b><br><b>HPS1347W</b> | Aluminum<br>Brass<br>Brass Plated<br>Chrome<br>S/S 302/304<br>S/S 430 | -<br>-<br>-<br>-<br>-<br>- |
| 2-Gang, 2-Decorator<br> | Black<br>Gray<br>Ivory<br>White | <b>HPS2347BK</b><br><b>HPS2347GY</b><br><b>HPS2347I</b><br><b>HPS2347W</b> | Aluminum<br>Brass<br>Brass Plated<br>Chrome<br>S/S 302/304<br>S/S 430 | -<br>-<br>-<br>-<br>-<br>- |
| 3-Gang, 3-Decorator<br> | Ivory<br>White                  | <b>HPS3347I</b><br><b>HPS3347W</b>   | Aluminum<br>Brass<br>Brass Plated<br>Chrome<br>S/S 302/304<br>S/S 430 | -<br>-<br>-<br>-<br>-<br>- |







Note: All standard and mid-size nylon wallplates feature pre-inserted captive screws for faster assembly, up to 6-gang.

Dimensions in Inches (mm)

# Wallplates and Covers



## GFCI, Surge Receptacles and Style Line® Device Wallplates









| Description  | Color  | Nylon Standard | Nylon Mid-Size  | Nylon Jumbo     | Material      | Metal Catalog Number |   |
|--|--|----------------|-----------------|-----------------|---------------|----------------------|---|
| 1-Gang, 1-Decorator<br>   | Almond   | <b>NP26AL</b>  | <b>NPJ26AL</b>  | -               | Aluminum      | ①                    |   |
|  | Black  | <b>NP26BK</b>  | <b>NPJ26BK</b>  | -               | Brass         | <b>SB26</b>          |   |
|  | Blue   | -              | <b>NPJ26BL</b>  | -               | Brass Plated  | <b>SBP26</b>         |   |
|  | Brown  | <b>NP26</b>    | <b>NPJ26</b>    | -               | Chrome        | <b>SCH26</b>         |   |
|  | Gray   | <b>NP26GY</b>  | <b>NPJ26GY</b>  | -               | S/S 302/304   | <b>SS26</b>          |   |
|  | Ivory  | <b>NP26I</b>   | <b>NPJ26I</b>   | <b>NPJJ26I</b>  | S/S 430       | <b>SS26L</b>         |   |
|  | Light Almond   | <b>NP26LA</b>  | <b>NPJ26LA</b>  | <b>NPJJ26LA</b> | Steel, Almond | <b>PHPS1AL*</b>      |   |
|  | Office White   | <b>NP26OW</b>  | <b>NPJ26OW</b>  | -               | Steel, Gray   | <b>PHPS1G*</b>       |   |
|  | Red  | <b>NP26R</b>   | <b>NPJ26R</b>   | -               |               |                      |   |
|  | White  | <b>NP26W</b>   | <b>NPJ26W</b>   | <b>NPJJ26W</b>  |               |                      |   |
|  | 2-Gang, 2-Decorator<br>   | Almond         | <b>NP262AL</b>  | <b>NPJ262AL</b> | -             | Aluminum             | ① |
| Black  |  | <b>NP262BK</b> | <b>NPJ262BK</b> | -               | Brass         | <b>SB262</b>         |   |
| Brown  |  | <b>NP262</b>   | <b>NPJ262</b>   | -               | Brass Plated  | <b>SBP262</b>        |   |
| Gray   |  | <b>NP262GY</b> | <b>NPJ262GY</b> | -               | Chrome        | <b>SCH262</b>        |   |
| Ivory  |  | <b>NP262I</b>  | <b>NPJ262I</b>  | -               | S/S 302/304   | <b>SS262</b>         |   |
| Light Almond   |  | <b>NP262LA</b> | <b>NPJ262LA</b> | -               | S/S 430       | <b>SS262L</b>        |   |
| Office White   |  | <b>NP262OW</b> | <b>NPJ262OW</b> | -               | Steel, Almond | <b>PHPS2AL*</b>      |   |
| Red  |  | <b>NP262R</b>  | <b>NPJ262R</b>  | -               | Steel, Gray   | <b>PHPS2G*</b>       |   |
| White  |  | <b>NP262W</b>  | <b>NPJ262W</b>  | -               |               |                      |   |
| 3-Gang, 3-Decorator<br>   |  | Almond         | <b>NP263AL</b>  | <b>NPJ263AL</b> | -             | Aluminum             | ① |
|  |  | Black          | <b>NP263BK</b>  | <b>NPJ263BK</b> | -             | Brass                | ① |
|  | Brown  | <b>NP263</b>   | <b>NPJ263</b>   | -               | Brass Plated  | <b>SBP263</b>        |   |
|  | Gray   | <b>NP263GY</b> | <b>NPJ263GY</b> | -               | Chrome        | ①                    |   |
|  | Ivory  | <b>NP263I</b>  | <b>NPJ263I</b>  | -               | S/S 302/304   | <b>SS263</b>         |   |
|  | Light Almond   | <b>NP263LA</b> | <b>NPJ263LA</b> | -               | S/S 430       | -                    |   |
|  | Office White   | <b>NP263OW</b> | <b>NPJ263OW</b> | -               | Steel, Almond | <b>PHPS3AL*</b>      |   |
|  | Red  | <b>NP263R</b>  | <b>NPJ263R</b>  | -               |               |                      |   |
|  | White  | <b>NP263W</b>  | <b>NPJ263W</b>  | -               |               |                      |   |
|  | 4-Gang, 4-Decorator<br> | Almond         | <b>NP264AL</b>  | <b>NPJ264AL</b> | -             | Aluminum             | ① |
|  |  | Black          | <b>NP264BK</b>  | <b>NPJ264BK</b> | -             | Brass                | ① |
| Brown  |  | <b>NP264</b>   | <b>NPJ264</b>   | -               | Brass Plated  | ①                    |   |
| Gray   |  | <b>NP264GY</b> | <b>NPJ264GY</b> | -               | Chrome        | ①                    |   |
| Ivory  |  | <b>NP264I</b>  | <b>NPJ264I</b>  | -               | S/S 302/304   | <b>SS264</b>         |   |
| Light Almond   |  | <b>NP264LA</b> | <b>NPJ264LA</b> | -               | S/S 430       | -                    |   |
| Office White   |  | <b>NP264OW</b> | <b>NPJ264OW</b> | -               | Steel, Almond | <b>PHPS4AL*</b>      |   |
| White  |  | <b>NP264W</b>  | <b>NPJ264W</b>  | -               |               |                      |   |
| 5-Gang, 5-Decorator<br> |  | Black          | <b>NP265BK</b>  | -               | -             | Aluminum             | ① |
|  |  | Brown          | <b>NP265</b>    | -               | -             | Brass                | ① |
|  |  | Gray           | <b>NP265GY</b>  | -               | -             | Brass Plated         | ① |
|  | Ivory  | <b>NP265I</b>  | -               | -               | Chrome        | ①                    |   |
|  | Light Almond   | <b>NP265LA</b> | -               | -               | S/S 302/304   | <b>SS265</b>         |   |
|  | White  | <b>NP265W</b>  | -               | -               | S/S 430       | -                    |   |
|  |  |                |                 |                 | Steel, Almond | <b>PHPS5AL*</b>      |   |
| 6-Gang, 6-Decorator<br> | Black  | <b>NP266BK</b> | -               | -               | Aluminum      | ①                    |   |
|  | Brown  | <b>NP266</b>   | -               | -               | Brass         | ①                    |   |
|  | Gray   | <b>NP266GY</b> | -               | -               | Brass Plated  | ①                    |   |
|  | Ivory  | <b>NP266I</b>  | -               | -               | Chrome        | ①                    |   |
|  | Light Almond   | <b>NP266LA</b> | -               | -               | S/S 302/304   | <b>SS266</b>         |   |
|  | White  | <b>NP266W</b>  | -               | -               | S/S 430       | -                    |   |
|  |  |                |                 |                 | Steel, Almond | <b>PHPS6AL*</b>      |   |

Note: All standard and mid-size nylon wallplates feature pre-inserted captive screws for faster assembly, up to 6-gang.  
 ① Available as a custom wallplate, see pages N-32 to N-36. Consult custom wallplates section for additional openings and combinations.  
 \*Powder coat paint finish.

Dimensions in Inches (mm)



## Combination Wallplates, 2-Gang

| Description  | Color  | Nylon Standard  | Nylon Mid-Size  | Material        | Metal Catalog Number |              |
|--|--|-----------------|-----------------|-----------------|----------------------|--------------|
|  2-Gang, 1-Toggle, 1-Duplex  | Almond   | <b>NP18AL</b>   | <b>NPJ18AL</b>  | Aluminum        | ①                    |              |
|  | Black  | <b>NP18BK</b>   | <b>NPJ18BK</b>  | Brass           | ①                    |              |
|  | Brown  | <b>NP18</b>     | <b>NPJ18</b>    | Brass Plated    | <b>SBP18</b>         |              |
|  | Gray   | <b>NP18GY</b>   | <b>NPJ18GY</b>  | Chrome          | <b>SCH18</b>         |              |
|  | Ivory  | <b>NP18I</b>    | <b>NPJ18I</b>   | S/S 302/304     | <b>SS18</b>          |              |
|  | Light Almond   | <b>NP18LA</b>   | <b>NPJ18LA</b>  | S/S 430         | <b>SS18L</b>         |              |
|  | Office White   | <b>NP18OW</b>   | <b>NPJ18OW</b>  | Steel, Almond   | <b>SP18AL*</b>       |              |
|  | Red  | <b>NP18R</b>    | <b>NPJ18R</b>   | Steel, Gray     | <b>SP18G*</b>        |              |
|  | White  | <b>NP18W</b>    | <b>NPJ18W</b>   |                 |                      |              |
|  |  2-Gang, 1-Duplex, 1-Decorator   | Almond          | <b>NP826AL</b>  | <b>NPJ826AL</b> | Aluminum             | ①            |
| Black  |  | <b>NP826BK</b>  | <b>NPJ826BK</b> | Brass           | <b>SB826</b>         |              |
| Brown  |  | <b>NP826</b>    | <b>NPJ826</b>   | Brass Plated    | ①                    |              |
| Gray   |  | <b>NP826GY</b>  | <b>NPJ826GY</b> | Chrome          | ①                    |              |
| Ivory  |  | <b>NP826I</b>   | <b>NPJ826I</b>  | S/S 302/304     | <b>SS826</b>         |              |
| Light Almond   |  | <b>NP826LA</b>  | <b>NPJ826LA</b> | S/S 430         | -                    |              |
| Office White   |  | <b>NP826OW</b>  | -               |                 |                      |              |
| White  |  | <b>NP826W</b>   | <b>NPJ826W</b>  |                 |                      |              |
|  2-Gang, 1-Toggle, 1-Decorator   |  | Almond          | <b>NP126AL</b>  | <b>NPJ126AL</b> | Aluminum             | ①            |
|  |  | Black           | <b>NP126BK</b>  | <b>NPJ126BK</b> | Brass                | <b>SB126</b> |
|  | Brown  | <b>NP126</b>    | <b>NPJ126</b>   | Brass Plated    | <b>SBP126</b>        |              |
|  | Gray   | <b>NP126GY</b>  | <b>NPJ126GY</b> | Chrome          | ①                    |              |
|  | Ivory  | <b>NP126I</b>   | <b>NPJ126I</b>  | S/S 302/304     | <b>SS126</b>         |              |
|  | Light Almond   | <b>NP126LA</b>  | <b>NPJ126LA</b> | S/S 430         | <b>SS126L</b>        |              |
|  | White  | <b>NP126W</b>   | <b>NPJ126W</b>  | Steel, Almond   | <b>PJS126AL*</b>     |              |
|  |  |                 |                 | Steel, Gray     | <b>PJS126G*</b>      |              |
|  |  2-Gang, 1-Duplex, 1-Telephone<br>.406 in. (10.3) Hole<br>Strap Mount | Black           | <b>NP128BK</b>  | -               | Aluminum             | -            |
|  |  | Brown           | <b>NP128</b>    | -               | Brass                | -            |
| Gray   |  | <b>NP128GY</b>  | -               | Brass Plated    | -                    |              |
| Ivory  |  | <b>NP128I</b>   | -               | Chrome          | -                    |              |
| White  |  | <b>NP128W</b>   | -               | S/S 302/304     | -                    |              |
|  |  |                 |                 | S/S 430         | -                    |              |
|  2-Gang, 1-Toggle, 1-Telephone<br>.406 in. (10.3) Hole<br>Strap Mount    | Black  | <b>NP112BK</b>  | -               | Aluminum        | -                    |              |
|  | Brown  | <b>NP112</b>    | -               | Brass           | -                    |              |
|  | Gray   | <b>NP112GY</b>  | -               | Brass Plated    | -                    |              |
|  | Ivory  | <b>NP112I</b>   | -               | Chrome          | -                    |              |
|  | Office White   | <b>NP112OW</b>  | -               | S/S 302/304     | -                    |              |
|  | White  | <b>NP112W</b>   | -               | S/S 430         | -                    |              |
|  2-Gang, 1-Decorator, 1-Telephone<br>.406 in. (10.3) Hole<br>Strap Mount | Black  | <b>NP1226BK</b> | -               | Aluminum        | -                    |              |
|  | Brown  | <b>NP1226</b>   | -               | Brass           | -                    |              |
|  | Gray   | <b>NP1226GY</b> | -               | Brass Plated    | -                    |              |
|  | Ivory  | <b>NP1226I</b>  | -               | Chrome          | -                    |              |
|  | White  | <b>NP1226W</b>  | -               | S/S 302/304     | -                    |              |
|  |  |                 |                 | S/S 430         | -                    |              |
|  2-Gang, 1-Single Receptacle<br>1.40 in. (35.6) Hole,<br>1-Duplex        | Almond   | <b>NP78AL</b>   | -               | Aluminum        | ①                    |              |
|  | Brown  | <b>NP78</b>     | -               | Brass           | ①                    |              |
|  | Gray   | <b>NP78GY</b>   | -               | Brass Plated    | ①                    |              |
|  | Ivory  | <b>NP78I</b>    | -               | Chrome          | ①                    |              |
|  | White  | <b>NP78W</b>    | -               | S/S 302/304     | <b>SS78</b>          |              |
|  |  |                 |                 | S/S 430         | -                    |              |
|  2-Gang, 1-Single Recept.<br>1.60 in. (40.6) Hole,<br>1-Duplex           | Almond   | -               | -               | Aluminum        | ①                    |              |
|  | Brown  | -               | -               | Brass           | ①                    |              |
|  | Ivory  | -               | -               | Brass Plated    | ①                    |              |
|  | White  | -               | -               | Chrome          | ①                    |              |
|  |  |                 |                 | S/S 302/304     | <b>SS8720</b>        |              |
|  |  |                 | S/S 430         | -               |                      |              |

Note: All standard and mid-size nylon wallplates feature pre-inserted captive screws for faster assembly, up to 6-gang.

① Available as a custom wallplate, see pages N-32 to N-36. Consult custom wallplates section for additional openings and combinations.

\*Powder coat paint finish.

Dimensions in Inches (mm)

## Combination Wallplates, 2-Gang

| Description  | Color          | Nylon Standard  | Nylon Mid-Size   | Material     | Metal Catalog Number |
|--|----------------|-----------------|------------------|--------------|----------------------|
| 2-Gang, 1-Toggle, 1-Single Receptacle<br>1.40 in. (35.6) Hole<br>                 | Black          | <b>NP17BK</b>   | -                | Aluminum     | ①                    |
|  | Brown          | <b>NP17</b>     | -                | Brass        | ①                    |
|  | Gray           | <b>NP17GY</b>   | -                | Brass Plated | ①                    |
|  | Ivory          | <b>NP17I</b>    | -                | Chrome       | ①                    |
|  | White          | <b>NP17W</b>    | -                | S/S 302/304  | <b>SS17</b>          |
| S/S 430  | -              |                 |                  |              |                      |
| 2-Gang, 1-Toggle, 1-Blank, Box Mount<br>  | Black          | <b>NP113BK</b>  | -                | Aluminum     | ①                    |
|  | Brown          | <b>NP113</b>    | <b>NPJ113</b>    | Brass        | ①                    |
|  | Gray           | <b>NP113GY</b>  | -                | Brass Plated | ①                    |
|  | Ivory          | <b>NP113I</b>   | <b>NPJ113I</b>   | Chrome       | ①                    |
|  | Light Almond   | <b>NP113LA</b>  | -                | S/S 302/304  | <b>SS113</b>         |
| White  | <b>NP113W</b>  | -               | S/S 430          | -            |                      |
| 2-Gang, 1-Toggle, 1-Blank, Strap Mount<br>  | Black          | -               | -                | Aluminum     | ①                    |
|  | Brown          | -               | -                | Brass        | ①                    |
|  | Gray           | -               | -                | Brass Plated | ①                    |
|  | Ivory          | -               | -                | Chrome       | ①                    |
|  | Light Almond   | -               | -                | S/S 302/304  | <b>SS114</b>         |
| White  | -              | -               | S/S 430          | -            |                      |
| 2-Gang, 1-Blank, 1-Duplex, Box Mount<br>   | Black          | <b>NP138BK</b>  | -                | Aluminum     | ①                    |
|  | Brown          | <b>NP138</b>    | <b>NPJ138</b>    | Brass        | ①                    |
|  | Gray           | <b>NP138GY</b>  | -                | Brass Plated | ①                    |
|  | Ivory          | <b>NP138I</b>   | <b>NPJ138I</b>   | Chrome       | ①                    |
|  | Light Almond   | <b>NP138LA</b>  | -                | S/S 302/304  | <b>SS138</b>         |
| White  | <b>NP138W</b>  | <b>NPJ138W</b>  | S/S 430          | -            |                      |
| 2-Gang, 1-Blank, 1-Duplex, Strap Mount<br>                                      | Black          | -               | -                | Aluminum     | ①                    |
|  | Brown          | -               | -                | Brass        | ①                    |
|  | Gray           | -               | -                | Brass Plated | ①                    |
|  | Ivory          | -               | -                | Chrome       | ①                    |
|  | Light Almond   | -               | -                | S/S 302/304  | <b>SS148</b>         |
| White  | -              | -               | S/S 430          | -            |                      |
| 2-Gang, 1-Blank, 1-Decorator, Box Mount<br>                                     | Black          | <b>NP1326BK</b> | <b>NPJ1326BK</b> | Aluminum     | ①                    |
|  | Brown          | <b>NP1326</b>   | <b>NPJ1326</b>   | Brass        | ①                    |
|  | Gray           | <b>NP1326GY</b> | <b>NPJ1326GY</b> | Brass Plated | ①                    |
|  | Ivory          | <b>NP1326I</b>  | <b>NPJ1326I</b>  | Chrome       | ①                    |
|  | Light Almond   | <b>NP1326LA</b> | <b>NPJ1326LA</b> | S/S 302/304  | <b>SS1426*</b>       |
| White  | <b>NP1326W</b> | <b>NPJ1326W</b> | S/S 430          | -            |                      |
| 2-Gang, 1-Telephone, .406 in. (10.3) Hole,<br>1-Blank, Strap Mount<br>          | Black          | <b>NP1214BK</b> | -                | Aluminum     | -                    |
|  | Brown          | <b>NP1214</b>   | -                | Brass        | -                    |
|  | Gray           | <b>NP1214GY</b> | -                | Brass Plated | -                    |
|  | Ivory          | <b>NP1214I</b>  | -                | Chrome       | -                    |
|  | White          | <b>NP1214W</b>  | -                | S/S 302/304  | -                    |
| S/S 430  | -              |                 |                  |              |                      |
| 2-Gang, 1-Single Receptacle<br>1.40 in. (35.6) Hole<br>1-Blank, Strap Mount<br> | Black          | <b>NP147BK</b>  | -                | Aluminum     | ①                    |
|  | Brown          | <b>NP147</b>    | -                | Brass        | ①                    |
|  | Gray           | <b>NP147GY</b>  | -                | Brass Plated | ①                    |
|  | Ivory          | <b>NP147I</b>   | -                | Chrome       | ①                    |
|  | White          | <b>NP147W</b>   | -                | S/S 302/304  | ①                    |
| S/S 430  | -              |                 |                  |              |                      |

Note: All standard and mid-size nylon wallplates feature pre-inserted captive screws for faster assembly, up to 6-gang.








①Available as a custom wallplate, see pages N-32 to N-36. Consult custom wallplates section for additional openings and combinations.

\*Strap Mount.

Dimensions in Inches (mm)



## Combination Wallplates, 3-Gang

| Description   | Color  | Nylon Standard   | Nylon Mid-Size   | Material  | Metal Catalog Number   |
|---|--|--|--|---|--|
| 3-Gang, 2-Toggle, 1-Duplex<br>            | Brown<br>Gray<br>Ivory<br>Light Almond<br>White          | <b>NP28</b><br><b>NP28GY</b><br><b>NP28I</b><br><b>NP28LA</b><br><b>NP28W</b>                              | <b>NPJ28</b><br>-<br><b>NPJ28I</b><br><b>NPJ28LA</b><br><b>NPJ28W</b>                                      | Aluminum<br>Brass<br>Brass Plated<br>Chrome<br>S/S 302/304<br>S/S 430<br>Steel, Almond<br>Steel, Gray | ①<br>①<br><b>SBP28</b><br>①<br><b>SS28</b><br>-<br><b>SP28AL*</b><br><b>SP28G*</b> |
| 3-Gang, 1-Toggle, 2-Duplex<br>            | Black<br>Brown<br>Gray<br>Ivory<br>White                 | <b>NP182BK</b><br><b>NP182</b><br><b>NP182GY</b><br><b>NP182I</b><br><b>NP182W</b>                         | -<br>-<br>-<br>-<br>-  | Aluminum<br>Brass<br>Brass Plated<br>Chrome<br>S/S 302/304<br>S/S 430                                 | ①<br>①<br>①<br>①<br><b>SS182</b><br>-  |
| 3-Gang, 2-Toggle, 1-Decorator<br>         | Black<br>Brown<br>Gray<br>Ivory<br>Light Almond<br>White | <b>NP226BK</b><br><b>NP226</b><br><b>NP226GY</b><br><b>NP226I</b><br><b>NP226LA</b><br><b>NP226W</b>       | <b>NPJ226BK</b><br><b>NPJ226</b><br><b>NPJ226GY</b><br><b>NPJ226I</b><br><b>NPJ226LA</b><br><b>NPJ226W</b> | Aluminum<br>Brass<br>Brass Plated<br>Chrome<br>S/S 302/304<br>S/S 430<br>Steel, Gray                  | ①<br>①<br>①<br>①<br><b>SS226</b><br>-<br><b>PJS226G*</b>                           |
| 3-Gang, 1-Toggle, 2-Decorator<br>        | Black<br>Brown<br>Gray<br>Ivory<br>Light Almond<br>White | <b>NP1262BK</b><br><b>NP1262</b><br><b>NP1262GY</b><br><b>NP1262I</b><br><b>NP1262LA</b><br><b>NP1262W</b> | -<br>-<br>-<br>-<br>-<br>-   | Aluminum<br>Brass<br>Brass Plated<br>Chrome<br>S/S 302/304<br>S/S 430                                 | ①<br>①<br>①<br>①<br>①<br>-   |
| 3-Gang, 2-Duplex, 1-Blank<br>           | Black<br>Brown<br>Gray<br>Ivory<br>Light Almond<br>White | -<br>-<br>-<br>-<br>-<br>-   | -<br>-<br>-<br>-<br>-<br>-   | Aluminum<br>Brass<br>Brass Plated<br>Chrome<br>S/S 302/304<br>S/S 430                                 | ①<br>①<br>①<br>①<br><b>SS211</b><br>-  |
| 3-Gang, 1-Duplex, 1-Blank, 1-Duplex<br> | Black<br>Brown<br>Gray<br>Ivory<br>Light Almond<br>White | -<br>-<br>-<br>-<br>-<br>-   | -<br>-<br>-<br>-<br>-<br>-   | Aluminum<br>Brass<br>Brass Plated<br>Chrome<br>S/S 302/304<br>S/S 430                                 | ①<br>①<br>①<br>①<br><b>SS8147</b><br>-   |
| 3-Gang, 2-Toggle, 1-Blank<br>           | Black<br>Brown<br>Gray<br>Ivory<br>Light Almond<br>White | -<br>-<br>-<br>-<br>-<br>-   | -<br>-<br>-<br>-<br>-<br>-   | Aluminum<br>Brass<br>Brass Plated<br>Chrome<br>S/S 302/304<br>S/S 430                                 | ①<br>①<br>①<br>①<br><b>SS213</b><br>-  |

Note: All standard and mid-size nylon wallplates feature pre-inserted captive screws for faster assembly, up to 6-gang.





① Available as a custom wallplate, see pages N-32 to N-36. Consult custom wallplates section for additional openings and combinations.

\*Powder coat paint finish.

Dimensions in Inches (mm)



## Combination Plates, 4- and 5-Gang

| Description  | Color        | Nylon Standard  | Nylon Mid-Size | Material     | Metal Catalog Number |
|--|--------------|-----------------|----------------|--------------|----------------------|
| 4-Gang, 3-Toggle, 1-Duplex<br>    | Brown        | <b>NP38</b>     | -              | Aluminum     | ①                    |
|  | Ivory        | <b>NP38I</b>    | -              | Brass        | ①                    |
|  | Light Almond | <b>NP38LA</b>   | -              | Brass Plated | ①                    |
|  | White        | <b>NP38W</b>    | -              | Chrome       | ①                    |
|  |              |                 |                | S/S 302/304  | <b>SS38</b>          |
|  |              |                 | S/S 430        | -            |                      |
| 4-Gang, 3-Toggle, 1-Decorator<br> | Black        | <b>NP326BK</b>  | -              | Aluminum     | ①                    |
|  | Brown        | <b>NP326</b>    | -              | Brass        | ①                    |
|  | Gray         | <b>NP326GY</b>  | -              | Brass Plated | ①                    |
|  | Ivory        | <b>NP326I</b>   | -              | Chrome       | ①                    |
|  | Light Almond | <b>NP326LA</b>  | -              | S/S 302/304  | <b>SS326</b>         |
|  | White        | <b>NP326W</b>   | -              | S/S 430      | -                    |
| 4-Gang, 2-Toggle, 2-Decorator<br> | Black        | <b>NP2262BK</b> | -              | Aluminum     | ①                    |
|  | Brown        | <b>NP2262</b>   | -              | Brass        | ①                    |
|  | Gray         | <b>NP2262GY</b> | -              | Brass Plated | ①                    |
|  | Ivory        | <b>NP2262I</b>  | -              | Chrome       | ①                    |
|  | Light Almond | <b>NP2262LA</b> | -              | S/S 302/304  | ①                    |
|  | White        | <b>NP2262W</b>  | -              | S/S 430      | -                    |
| 5-Gang, 4-Toggle, 1-Duplex<br>   | Brown        | <b>NP48</b>     | -              | Aluminum     | ①                    |
|  | Ivory        | <b>NP48I</b>    | -              | Brass        | ①                    |
|  | White        | <b>NP48W</b>    | -              | Brass Plated | ①                    |
|  |              |                 |                | Chrome       | ①                    |
|  |              |                 | S/S 302/304    | ①            |                      |
|  |              |                 | S/S 430        | -            |                      |

Note: All standard and mid-size nylon wallplates feature pre-inserted captive screws for faster assembly, up to 6-gang.

① Available as a custom wallplate, see pages N-32 to N-36. Consult custom wallplates section for additional openings and combinations.

Dimensions in Inches (mm)



## Telephone and Coaxial Outlet Plates

| Description   | Color        | Nylon Standard | Nylon Mid-Size | Material                 | Metal Catalog Number |
|---|--------------|----------------|----------------|--------------------------|----------------------|
|  1-Gang, 1-Tel Nylon .406 in. (10.3) Hole, Box Mount<br>Metal .640 in. (16.3) Hole, Box Mount | Almond       | <b>NP11AL</b>  | <b>NPJ11AL</b> | Aluminum                 | ①                    |
|   | Black        | <b>NP11BK</b>  | -              | Brass                    | ①                    |
|   | Brown        | <b>NP11</b>    | <b>NPJ11</b>   | Brass Plated             | ①                    |
|   | Gray         | <b>NP11GY</b>  | -              | Chrome                   | ①                    |
|   | Ivory        | <b>NP11I</b>   | <b>NPJ11I</b>  | S/S 302/304              | <b>SS11*</b>         |
|   | Light Almond | <b>NP11LA</b>  | <b>NPJ11LA</b> | S/S 430                  | <b>SS11L*</b>        |
|   | Red          | <b>NP11R</b>   | -              |                          |                      |
| White   | <b>NP11W</b> | <b>NPJ11W</b>  |                |                          |                      |
|  1-Gang, 1-Tel Nylon .406 in. (10.3) Hole, Metal .640 in. (16.3) Hole, Strap Mount            | Almond       | <b>NP12AL</b>  | -              | Aluminum                 | ①                    |
|   | Black        | <b>NP12BK</b>  | -              | Brass                    | <b>SB12*</b>         |
|   | Brown        | <b>NP12</b>    | -              | Brass Plated             | <b>SBP12*</b>        |
|   | Gray         | <b>NP12GY</b>  | -              | Chrome                   | <b>SCH12*</b>        |
|   | Ivory        | <b>NP12I</b>   | -              | S/S 302/304              | <b>SS12*</b>         |
|   | White        | <b>NP12W</b>   | -              | S/S 430                  | <b>SS12L*</b>        |
|   |              |                |                |                          |                      |
|  1-Gang, 1-Tel .625 in. (15.9) Hole, Box Mount  | Almond       | <b>NP737AL</b> | -              | Aluminum                 | -                    |
|   | Brown        | <b>NP737</b>   | -              | Brass                    | -                    |
|   | Ivory        | <b>NP737I</b>  | -              | Brass Plated             | -                    |
|   | White        | <b>NP737W</b>  | -              | Chrome                   | -                    |
|   |              |                |                | S/S 302/304              | -                    |
|  1-Gang, 1-Tel .625 in. (15.9) Hole, Strap Mount   | Brown        | <b>NP730</b>   | -              | Aluminum                 | -                    |
|   | Ivory        | <b>NP730I</b>  | -              | Brass                    | -                    |
|   | White        | <b>NP730W</b>  | -              | Brass Plated             | -                    |
|   |              |                |                | Chrome                   | -                    |
|   |              |                |                | S/S 302/304              | -                    |
|  1-Gang, 1-Tel .380 in. (9.7) Hole, Box Mount or Strap Mount                                | Almond       | -              | -              | Aluminum                 | ①                    |
|   | Brown        | -              | -              | Brass                    | ①                    |
|   | Ivory        | -              | -              | Brass Plated             | ①                    |
|   | White        | -              | -              | Chrome                   | ①                    |
|   |              |                |                | S/S 302/304              | <b>SS739</b>         |
|  2-Gang, 2-Tel Nylon .406 in. (10.3) Hole, Metal .640 in. (16.3) Hole, Box Mount            | Black        | <b>NP21BK</b>  | -              | Aluminum                 | ①                    |
|   | Brown        | <b>NP21</b>    | -              | Brass                    | ①                    |
|   | Gray         | <b>NP21GY</b>  | -              | Brass Plated             | ①                    |
|   | Ivory        | <b>NP21I</b>   | -              | Chrome                   | ①                    |
|   | White        | <b>NP21W</b>   | -              | S/S 302/304, Strap Mount | <b>SS22*</b>         |
|   |              |                |                | S/S 430                  | -                    |
|   |              |                |                |                          |                      |
|  2-Gang, 1-Tel .640 in. (16.3) Hole, Box Mount  | Almond       | -              | -              | Aluminum                 | -                    |
|   | Brown        | -              | -              | Brass                    | -                    |
|   | Ivory        | -              | -              | Brass Plated             | -                    |
|   | White        | -              | -              | Chrome                   | -                    |
|   |              |                |                | S/S 302/304              | <b>SS741*</b>        |
|   |              |                | S/S 430        | -                        |                      |












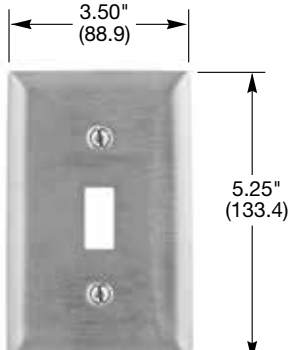

Note: All standard and mid-size nylon wallplates feature pre-inserted captive screws for faster assembly, up to 6-gang.

① Available as a custom wallplate, see pages N-32 to N-36. Consult custom wallplates section for additional openings and combinations.

\*.50" (12.7) I.D. nylon bushing provided.

Dimensions in Inches (mm)

## Jumbo, Smooth, Stainless Steel Type 302/304 Wallplates

| Configuration  | Catalog Number | Configuration  | Catalog Number |
|--|----------------|--|----------------|
| 1-Gang, 1-Toggle<br>  | <b>SSJ1</b>    | 1-Gang, 1-Single Receptacle for 2.09–2.13 in. (53.1–54.1) Dia. Face<br> | <b>SSJ723</b>  |
| 2-Gang, 2-Toggle<br>  | <b>SSJ2</b>    | 1-Gang, 1-Blank, Box Mount<br>  | <b>SSJ13</b>   |
| 1-Gang, 1-Duplex<br>  | <b>SSJ8</b>    | 1-Gang, 1-Telephone Opening, .640 in. (16.3) Box Mount<br>              | <b>SSJ11*</b>  |
| 2-Gang, 2-Duplex<br>   | <b>SSJ82</b>   | 2-Gang, 1-Toggle, 1-Duplex<br>   | <b>SSJ18</b>   |
| 1-Gang, 1-Decorator<br>   | <b>SSJ26</b>   | 2-Gang, 1-Toggle, 1-Decorator<br>                                     | <b>SSJ126</b>  |
| 2-Gang, 2-Decorator<br>   | <b>SSJ262</b>  |    |                |
| 1-Gang, 1-Single Receptacle for 1.36–1.39 in. (34.5–35.3) Dia. Face<br> | <b>SSJ7</b>    |  |                |

Note: \*.50 in. (12.7) I.D. nylon bushing provided.  
Specifications are subject to change without notice.

**Jumbo Wallplate**




Oversize dimensions (see page N-31 for more details).

1-Gang, 5.25 in. x 3.50 in. (133.4 x 88.9).  
2-Gang, 5.25 in. x 5.31 in. (133.4 x 134.9).

Dimensions in Inches (mm)







## Pre-Marked "EMERGENCY" Wallplates

| Description   | Color | Nylon Standard | Nylon Mid-Size  | Material  | Metal Catalog Number                    |
|---|-------|----------------|-----------------|---|---|
|  1-Gang, 1-Duplex, paint filled white lettering | Red   | -              | <b>NPJ8RMEV</b> | Aluminum<br>Brass<br>Brass Plated<br>Chrome<br>S/S 302/304<br>S/S 430 | -<br>-<br>-<br>-<br><b>SS8MEV</b><br>-  |
|  1-Gang, 1-Toggle, paint filled white lettering | Red   | -              | <b>NPJ1RME</b>  | Aluminum<br>Brass<br>Brass Plated<br>Chrome<br>S/S 302/304<br>S/S 430 | -<br>-<br>-<br>-<br><b>SS1ME</b><br>-   |
|  2-Gang, 2 Duplex, paint filled red lettering   | -     | -              | -               | Aluminum<br>Brass<br>Brass Plated<br>Chrome<br>S/S 302/304<br>S/S 430 | -<br>-<br>-<br>-<br><b>SS82MEV</b><br>- |

Note: See page N-31 for mid-size plate dimensions.  
All lettering .25 in. (6.3) high.



## Stainless Steel Barrel Key Switch Wallplates

| Description                       | 1-Gang, with on/off markings  | 1-Gang, with position markings  | 2-Gang, with on/off markings   | 2-Gang, with position markings  |
|-----------------------------------|---|---|--|---|
| Stainless steel, 302/304, smooth. | <b>SS12RKL</b>  | <b>SS12RKLM</b>   | <b>SS22RKL</b>   | <b>SS22RKLM</b>   |
|                                   |  |  |  |  |

Note: See page D-6 for barrel key switch selection.

## Single Count Screws and Accessories

| Description   | Catalog Number    |
|---|-------------------|
| Stainless steel screw, standard slot, .38 in. (9.7) long. | <b>HBL7341SS</b>  |
| Security spanner head screws, 6-32 thread, 100 count.     | <b>HBL7342RKL</b> |
| Screwdriver with spanner head security bit.               | <b>HBL7372RKL</b> |







**HBL7342RKL**






**HBL7372RKL**

Dimensions in Inches (mm)


## Pre-Marked "ISOLATED GROUND" Wallplates

| Description  | Color  | Nylon Standard  | Nylon No Marking | Material  | Metal Catalog Number       |
|--|--------|-----------------|------------------|---|----------------------------|
| 1-Gang, 1-Duplex, paint filled black<br>  | Orange | <b>NP80IG</b>   | <b>NP8OR</b>     | Aluminum<br>Brass<br>Brass Plated<br>Chrome<br>S/S 302/304<br>S/S 430 | -<br>-<br>-<br>-<br>-<br>- |
| 1-Gang, 1-Decorator, paint filled black<br>   | Orange | <b>NP260IG</b>  | -                | Aluminum<br>Brass<br>Brass Plated<br>Chrome<br>S/S 302/304<br>S/S 430 | -<br>-<br>-<br>-<br>-<br>- |
| 1-Gang, 1-Single Receptacle 1.40 in. (35.6)<br>Hole for 1.36–1.39 in. (34.5–35.3)<br>Dia. face, paint filled black<br>                                | Orange | <b>NP70IG</b>   | -                | Aluminum<br>Brass<br>Brass Plated<br>Chrome<br>S/S 302/304<br>S/S 430 | -<br>-<br>-<br>-<br>-<br>- |
| 1-Gang, 1-Single Receptacle 1.60 in. (40.6)<br>Hole for 20 and 30A Twist-Lock®<br>with 1.55–1.58 in. (39.4–40.1)<br>Dia. face, paint filled black<br> | Orange | <b>NP7200IG</b> | -                | Aluminum<br>Brass<br>Brass Plated<br>Chrome<br>S/S 302/304<br>S/S 430 | -<br>-<br>-<br>-<br>-<br>- |

## Pre-Marked "COMPUTER ONLY" Wallplates

| Description  | Color           | Nylon Standard | Nylon Mid-Size                   | Material  | Metal Catalog Number       |
|--|-----------------|----------------|----------------------------------|---|----------------------------|
| 1-Gang, 1-Duplex, paint filled black<br>    | Orange<br>Ivory | -<br>-         | <b>NPJ8CO</b><br><b>NPJ8C</b>    | Aluminum<br>Brass<br>Brass Plated<br>Chrome<br>S/S 302/304<br>S/S 430 | -<br>-<br>-<br>-<br>-<br>- |
| 2-Gang, 2-Duplex, paint filled black<br>    | Orange          | -              | <b>NPJ82CO</b>                   | Aluminum<br>Brass<br>Brass Plated<br>Chrome<br>S/S 302/304<br>S/S 430 | -<br>-<br>-<br>-<br>-<br>- |
| 1-Gang, 1-Decorator, paint filled black<br> | Blue<br>Ivory   | -<br>-         | <b>NPJ26CBL</b><br><b>NPJ26C</b> | Aluminum<br>Brass<br>Brass Plated<br>Chrome<br>S/S 302/304<br>S/S 430 | -<br>-<br>-<br>-<br>-<br>- |

## Louver Plate, 1-Gang, Box Mount

| Description  | Color                 | Nylon Standard        | Nylon Mid-Size        | Material  | Metal Catalog Number   |
|--|-----------------------|-----------------------|-----------------------|---|--|
| 1-Gang, Vertical Mounted Louver<br> | -<br>-<br>-<br>-<br>- | -<br>-<br>-<br>-<br>- | -<br>-<br>-<br>-<br>- | Aluminum<br>Brass<br>Brass Plated<br>Chrome<br>S/S 302/304<br>S/S 430 | ①<br><b>SB771</b><br><b>SBP771</b><br>①<br><b>SS771</b><br>- |

Note: \*See page N-31 for mid-size plate dimensions.

① Available as a custom wallplate, see pages N-32 to N-36. Consult custom wallplates section for additional openings and combinations.

Dimensions in Inches (mm)



SWP1



SWP8

## 1-Gang Security Wallplates, White

| Description                               | Catalog Number |
|---|----------------|
| 1-Toggle switch                           | <b>SWP1</b>    |
| 1-Duplex receptacle                       | <b>SWP8</b>    |
| 1-GFCI/Style Line® opening                | <b>SWP26</b>   |
| 1-Telephone or TV opening .640 in. (16.3) | <b>SWP12</b>   |
| 1-Blank                                   | <b>SWP13</b>   |

## 2-Gang Security Wallplates, White



SWP82



SWP18

| Description                                 | Catalog Number |
|---|----------------|
| 2-Toggle switches                           | <b>SWP2</b>    |
| 2-Duplex receptacles                        | <b>SWP82</b>   |
| 1-Toggle switch, 1-Duplex receptacle        | <b>SWP18</b>   |
| 2-GFCI/Style Line® openings                 | <b>SWP262</b>  |
| 1-Toggle switch, 1-GFCI/Style Line® opening | <b>SWP126</b>  |
| 1-Duplex receptacle, 1-Telephone or TV      | <b>SWP812</b>  |
| 1-Duplex receptacle, 1-Blank                | <b>SWP813</b>  |
| 2-Blank                                     | <b>SWP23</b>   |




SWP28

## 3-Gang Security Wallplates, White

| Description                            | Catalog Number |
|--|----------------|
| 2-Toggle switches, 1-Duplex receptacle | <b>SWP28</b>   |

## Dimensions Inches (mm)

|        | A                 | B                 | C              | D                | E                | F               | G                | H                |
|--------|-------------------|-------------------|----------------|------------------|------------------|-----------------|------------------|------------------|
| 1-Gang | 3.77"<br>(95.8)   | 5.52"<br>(140.2)  | .55"<br>(14.0) | 3.37"<br>(85.6)  | 5.13"<br>(130.3) | 1.00"<br>(25.4) | 4.63"<br>(117.6) | 2.88"<br>(73.2)  |
| 2-Gang | 5.52"<br>(140.2)  | 5.52"<br>(140.2)  | .55"<br>(14.0) | 5.13"<br>(130.3) | 5.13"<br>(130.3) | 1.00"<br>(25.4) | 4.63"<br>(117.6) | 4.63"<br>(117.6) |
| 3-Gang | 7.39"<br>(187.71) | 5.52"<br>(140.21) | .55"<br>(14.0) | 7.00"<br>(177.8) | 5.13"<br>(130.3) | 1.00"<br>(25.4) | 4.63"<br>(117.6) | 6.50"<br>(165.1) |

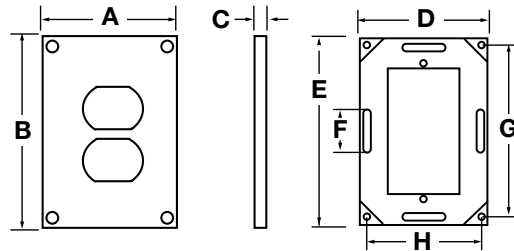

## Specifications

Tamper resistant wallplate 1-gang duplex receptacle shall be of the following construction:

Cover plate: One piece #14 cold rolled zinc plated steel. Plate shall have a five stage baked white polyester powder enamel finish. Gloss: 85%; reflectance: 93%; hardness minimum: 2H and pass 600 hour salt spray test.

Back plate: #10 cold rolled galvanized steel. Plate assembly shall use four (4) #8-32 X 1/2 inch stainless steel T-15 TORX® head screws with center pin reject. Plate must be UL listed to UL 514D and comply with the NEC®.

TORX® is a registered trademark of Textron Inc.

NEC® is a registered trademark of the The National Electrical Code.

Dimensions in Inches (mm)



## Brass Locking Cover Plate

| Description  | Catalog Number  |
|--|-----------------|
| Locking cover plate for single 15 and 20A straight blade receptacles and 15A Twist-Lock® receptacles. Straight cylinder type lock. All cylinder locks keyed alike. | <b>HBL96067</b> |



**HBL96067**  
Shown with receptacle  
(sold separately)



**HBL6187**  
Shown with receptacle  
and back box  
(sold separately)

## Weather Shield Plate

| Description                             | Catalog Number |
|---|----------------|
| 20° angle plate for duplex receptacles. | <b>HBL6187</b> |

## Catalog Number of Receptacles in Groups A through E below

| Group A   |                  | Group B   |                  |                  | Group C   |                 | Group D   |  | Group E   |
|---|------------------|---|------------------|------------------|---|-----------------|---|--|---|
| Boss diameter<br>1.36" to 1.39"<br>(34.5 to 35.3) |                  | Boss diameter<br>1.55" to 1.58"<br>(39.4 to 40.1) |                  |                  | Boss diameter<br>1.68" to 1.72"<br>(42.7 to 43.7) |                 | Boss diameter<br>2.09" to 2.13"<br>(53.1 to 54.1) |  | Boss diameter<br>2.28" to 2.44"<br>(57.9 to 62.0) |
| <b>HBL2300HG</b>                                  | <b>HBL5661</b>   | <b>HBL23CM10</b>                                  | <b>HBL2530</b>   | <b>HBL2770</b>   | <b>HBL45105</b>                                   | <b>HBL7962</b>  | <b>HBL7301A</b>                                   |  |   |
| <b>HBL23030</b>                                   | <b>HBL6810</b>   | <b>HBL2310</b>                                    | <b>HBL26CM10</b> | <b>HBL2810</b>   | <b>HBL45205</b>                                   | <b>HBL9350</b>  | <b>HBL8330A</b>                                   |  |   |
| <b>HBL4560</b>                                    | <b>HBL7210B</b>  | <b>HBL2320</b>                                    | <b>HBL2610</b>   | <b>HBL2820</b>   | <b>HBL45305</b>                                   | <b>HBL9308</b>  | <b>HBL8350A</b>                                   |  |   |
| <b>HBL4710</b>                                    | <b>HBL7250</b>   | <b>HBL2330</b>                                    | <b>HBL2620</b>   | <b>HBL2830</b>   | <b>HBL45905</b>                                   | <b>HBL9315</b>  | <b>HBL8430A</b>                                   |  |   |
| <b>HBL4760</b>                                    | <b>HBL7310B</b>  | <b>HBL2340</b>                                    | <b>HBL2630</b>   | <b>HBL3330</b>   |   | <b>HBL9330</b>  | <b>HBL8450A</b>                                   |  |   |
| <b>HBL5251</b>                                    | <b>HBL7310BG</b> | <b>HBL2410</b>                                    | <b>HBL2640</b>   | <b>HBL3330G</b>  |   | <b>HBL9360•</b> | <b>HBL8460A</b>                                   |  |   |
| <b>HBL52CM61</b>                                  | <b>HBL7535</b>   | <b>HBL2420</b>                                    | <b>HBL2650</b>   | <b>HBL3430</b>   |   | <b>HBL9365•</b> | <b>HBL9430A</b>                                   |  |   |
| <b>HBL5261</b>                                    | <b>HBL7582</b>   | <b>HBL2430</b>                                    | <b>HBL2710</b>   | <b>HBL3430G</b>  |   | <b>HBL9367•</b> | <b>HBL9450A</b>                                   |  |   |
| <b>HBL53CM61</b>                                  | <b>HBL8210</b>   | <b>HBL2440</b>                                    | <b>HBL2720</b>   | <b>HBL3520</b>   |   |                 | <b>HBL9460A</b>                                   |  |   |
| <b>HBL5361</b>                                    | <b>HBL8310</b>   | <b>HBL2450</b>                                    | <b>HBL2730</b>   | <b>HBL7410B</b>  |   |                 |   |  |   |
| <b>HBL5461</b>                                    | <b>HBL8410</b>   | <b>HBL2460</b>                                    | <b>HBL2740</b>   | <b>HBL7410BG</b> |   |                 |   |  |   |
| <b>HBL5552B</b>                                   | <b>HBL8420</b>   | <b>HBL2510</b>                                    | <b>HBL2750</b>   |                  |   |                 |   |  |   |
|   |                  | <b>HBL2520</b>                                    | <b>HBL2760</b>   |                  |   |                 |   |  |   |

Note: •50A 2P 3W.

## Wallplates for Single Receptacles

| Description                          | Group A   |             | Group B   |   | Group C   |   | Group D   |               | Group E   |
|--------------------------------------|---|-------------|---|---|---|---|---|---------------|---|
|                                      | Boss diameter<br>1.36" to 1.39"<br>(34.5 to 35.3) |             | Boss diameter<br>1.55" to 1.58"<br>(39.4 to 40.1) |   | Boss diameter<br>1.68" to 1.72"<br>(42.7 to 43.7) |   | Boss diameter<br>2.09" to 2.13"<br>(53.1 to 54.1) |               | Boss diameter<br>2.28" to 2.44"<br>(57.9 to 62.0) |
| Smooth nylon, brown.                 | <b>NP7*</b>                                       | -           | <b>NP720*</b>                                     | - | -   | - | <b>NP724*</b>                                     | <b>NP703*</b> | -   |
| Cast aluminum.                       | <b>HBL7320</b>                                    | -           | <b>HBL7320</b>                                    | - | <b>HBL3394</b>                                    | - | <b>HBL9419</b>                                    | -             | -   |
| Stainless steel,<br>302/304, smooth. | <b>SS7**</b>                                      | <b>SS72</b> | <b>SS720</b>                                      | - | <b>SS725</b>                                      | - | <b>SS723</b>                                      | <b>SS703</b>  | <b>SS701</b>                                      |

Note: See pages N-7 and N-8 for complete plate descriptions.

\*Catalog number indicated is Brown, add with the following to designate color: "AL" (Almond), "BK" (Black), "GY" (Gray), "I" (Ivory), and "W" (white).

\*\*Catalog number indicated is Stainless Steel, replace "SS" with the following prefix to designate material: "SA" for Anodized Aluminum, "SB" for Solid Brass.

## Weatherproof Lift Covers for WDL "Closed" and WDL "Open", Wet Locations, 1-Gang

| Description                                  | Group A   |  | Group B   |  | Group C   |  | Group D   |  | 50A<br>Twist-Lock®<br>Receptacles | 30A 4W<br>Hubbellok®<br>Receptacles  |
|--|---|--|---|--|---|--|---|--|-----------------------------------|--------------------------------------|
|  | Boss diameter<br>1.36" to 1.39"<br>(34.5 to 35.3) |  | Boss diameter<br>1.55" to 1.58"<br>(39.4 to 40.1) |  | Boss diameter<br>1.68" to 1.72"<br>(42.7 to 43.7) |  | Boss diameter<br>2.09" to 2.13"<br>(53.1 to 54.1) |  |                                   |                                      |
| Thermoplastic, with<br>cover "open", gray.   | <b>HBL7423WO</b>                                  |  | <b>HBL7425WOA</b>                                 |  | <b>HBL7424WO</b>                                  |  | -   |  | <b>HBL7774WO^</b>                 | -                                    |
| Thermoplastic, with<br>cover "open", yellow. | <b>HBL74CM23WO</b>                                |  | <b>HBL74CM25WOA</b>                               |  | <b>HBL74CM24WO</b>                                |  | -   |  | <b>HBL77CM74WO^</b>               | -                                    |
| Cast aluminum, with<br>cover "closed".       | <b>HBL7420</b>                                    |  | <b>HBL7420</b>                                    |  | <b>HBL3393</b>                                    |  | <b>HBL9420</b><br><b>HBL9425•</b>                 |  | <b>HBL7770</b>                    | <b>HBL20405†</b><br><b>HBL20446†</b> |

Note: •50A 2P 3W.

▲The "CS" versions of 50A Twist-Lock® receptacles will only fit these thermoplastic plates.

†HBL20446 plate painted red for use with HBL20443 only. HBL20405 plate is for use with HBL20403 only. See page B-62 for devices.



**IP44**  
SUITABILITY



**HBL7777A**

### For Receptacles with Face Diameters of 2.28–2.44 in. (57.9–62.0)

| Description  | Catalog Number                |
|--|-------------------------------|
| Thermoplastic, 2-gang, wet and damp locations with cover “closed”, gray.   | <b>HBL7777A<sup>▲</sup></b>   |
| Thermoplastic, 2-gang, wet and damp locations with cover “closed”, yellow. | <b>HBL77CM77A<sup>▲</sup></b> |
| Thermoplastic, 2-gang, wet and damp locations with cover “closed”, gray.   | <b>HBL7777<sup>▽</sup></b>    |



**HBL9420**

### For Receptacles with Face Diameters of 2.09–2.13 in. (53.1–54.1)

| Description   | Catalog Number |
|---|----------------|
| Cast aluminum, wet locations only when cover “closed” and damp locations. | <b>HBL9420</b> |
| Cast aluminum, no lift cover. NOT weatherproof.                           | <b>HBL9419</b> |

### For 50A Twist-Lock<sup>®</sup> Single Receptacles

| Description   | Catalog Number                 |
|---|--------------------------------|
| Thermoplastic, wet and damp locations with cover “open”, gray.            | <b>HBL7774WO<sup>*</sup></b>   |
| Thermoplastic, wet and damp locations with cover “open”, yellow.          | <b>HBL77CM74WO<sup>*</sup></b> |
| Cast aluminum, wet locations only when cover “closed” and damp locations. | <b>HBL7770</b>                 |
| Galvanized Steel, fits 4" square or 2-gang box.                           | <b>HBL50SC<sup>**</sup></b>    |
| Stainless steel, single gang, wallplate. NOT weatherproof.                | <b>SS750<sup>▲</sup></b>       |



**HBL7774WO**

### For 30A, 4 Wire Hubbellock<sup>®</sup> Receptacles

| Description   | Catalog Number                |
|---|-------------------------------|
| Thermoplastic, wet and damp locations with cover “open”, gray.                              | <b>HBL7428WOG<sup>*</sup></b> |
| Thermoplastic, wet and damp locations with cover “open”, yellow.                            | <b>HBL7428WOY<sup>*</sup></b> |
| Thermoplastic, wet and damp locations with cover “open”, red.                               | <b>HBL7428WOR<sup>*</sup></b> |
| Cast aluminum, wet locations only when cover “closed” and damp locations, lift cover plate. | <b>HBL20405</b>               |
| Cast aluminum, wet locations only when cover “closed” and damp locations, red finish.       | <b>HBL20446</b>               |
| Cast aluminum, no lift cover. NOT weatherproof.   | <b>HBL20406</b>               |



**HBL7770**

Note: <sup>▲</sup>Will fit FS/FD boxes having plate mounting holes on 3.25 in. x 3.75 in. (82.6 x 95.3) centers.  
<sup>▽</sup>Will only fit old style porcelain face devices.  
<sup>\*</sup>The “CS” versions of 50A Twist-Lock<sup>®</sup> will only fit these plates.  
<sup>\*\*</sup>IP20 Suitability.

### Weatherproof Covers for Single Receptacles for Use on FS/FD Boxes

Note: All weatherproof plates are UL Listed for WET LOCATIONS WITH COVER CLOSED, for intermittent use in wet locations or use in damp locations. Those with suffix “WO” are listed for WET LOCATIONS with cover open in continuous use. All plates are gasketed and self-closing.

### Accessories

| Description  | Catalog Number             |
|--|----------------------------|
| Sub-plate for mounting and weatherproofing flanged devices with mounting centers of 1.76", 1.94" or 2.13" such as HBL7556, HBL4716, etc. when used with a HBL7420 or HBL7425WOA type weatherproof plate. | <b>7452<sup>•</sup></b>    |
| Adapter plate for mounting HBL7423WO, HBL7424WO, HBL7425WOA or HBL7420 plates to standard boxes.   | <b>HBL7349<sup>•</sup></b> |


Note: <sup>•</sup>Not UL Listed.




**HBL20405**



**HBL7349**



**7452**



**Typical Plate, 1-Gang**

Dimensions in Inches (mm)

**IP44**  
SUITABILITY

## For Receptacles with Face Diameters of 1.36–1.39 in. (34.5–35.3)

| Description  | Catalog Number     |
|--|--------------------|
| Thermoplastic, wet and damp locations with cover "open", gray.           | <b>HBL7423WO</b>   |
| Thermoplastic, wet and damp locations with cover "open", yellow.         | <b>HBL74CM23WO</b> |
| Cast aluminum, wet location only when cover "closed" and damp locations. | <b>HBL7420</b>     |
| Cast aluminum, no lift cover, NOT weatherproof.                          | <b>HBL7320*</b>    |



HBL7423WO

## For Switches and Receptacles with Face Diameters of 1.55–1.58 in. (39.4–40.1)

| Description  | Catalog Number       |
|--|----------------------|
| Thermoplastic, wet and damp locations with cover "open", gray.   | <b>HBL7425WOA</b>    |
| Thermoplastic, wet and damp locations with cover "open", yellow. | <b>HBL74CM25WOA</b>  |
| Thermoplastic, wet and damp locations with cover "open", white.  | <b>HBL74CM25WOAW</b> |
| Cast aluminum, wet and damp locations with cover "closed."       | <b>HBL7420*</b>      |
| Cast aluminum, no lift cover, NOT weatherproof.                  | <b>HBL7320*</b>      |
| Thermoplastic, wet and damp locations with cover "open", gray.   | <b>HBL7428WOG**</b>  |
| Thermoplastic, wet and damp locations with cover "open", yellow. | <b>HBL7428WOY**</b>  |
| Thermoplastic, wet and damp locations with cover "open", red.    | <b>HBL7428WOR**</b>  |



HBL7425WOA

## For Receptacles with Face Diameters of 1.68–1.72 in. (42.7–43.7)

| Description  | Catalog Number     |
|--|--------------------|
| Thermoplastic, wet and damp locations with cover "open", gray.           | <b>HBL7424WO</b>   |
| Thermoplastic, wet and damp locations with cover "open", yellow.         | <b>HBL74CM24WO</b> |
| Cast aluminum, wet location only when cover "closed" and damp locations. | <b>HBL3393</b>     |
| Cast aluminum, no lift cover, NOT weatherproof.                          | <b>HBL3394*</b>    |



HBL7420

Note: \*Cast aluminum lift cover with fibershield for standard toggle and PresSwitch® Switches.

\*\*Features two #6-32 threaded inserts to back mount device to cover.

▲IP20 SUITABILITY.

All weatherproof lift cover plates on this page are UL Listed as "WDL Closed" for use in wet locations with cover closed and in damp locations.

## Weatherproof Covers for Single Receptacles on FS/FD Boxes

Note: All weatherproof plates are UL Listed for WET LOCATIONS WITH COVER CLOSED for intermittent use in wet locations or use in damp locations. Those with suffix "WO" are listed for WET LOCATIONS with cover open in continuous use. All plates are gasketed and self-closing.




HBL7320

## 2011 National Electrical Code (NEC®)

### 406.9 Receptacles in Damp or Wet Locations.

(A) Damp Locations. A receptacle installed outdoors in a location protected from the weather or in other damp locations shall have an enclosure for the receptacle that is weatherproof when the receptacle is covered (attachment plug cap not inserted and receptacle covers closed). An installation suitable for wet locations shall also be considered suitable for damp locations. A receptacle shall be considered to be in a location protected from the weather where located under roofed open porches, canopies, marquees, and the like, and will not be subjected to a beating rain or water runoff. All 15 and 20A, 125 and 250V nonlocking receptacles shall be listed weather-resistant type. FPN: The types of receptacles covered by this requirement are identified as 5-15, 5-20, 6-15 and 6-20 in ANSI/NEMA WD 6-2002, National Electrical Manufacturers Association Standard for Dimensions of Attachment Plugs and Receptacles.

(B) Wet Locations. 15 and 20A, 125 and 250V receptacles installed in a wet location shall have an enclosure that is weatherproof whether or not the attachment plug cap is inserted. For other one or two family dwellings, an outlet box hood installed for this purpose shall be listed, and where installed on an enclosure supported from grade as described in 314.23(B) or as described in 314.23(F) shall be identified as "extra-duty". All 15 and 20A, 125 and 250V nonlocking type receptacles shall be listed weather resistant type.



Typical Plate, 1-Gang



HBL7424WO



HBL3393

Dimensions in Inches (mm)



**IP44**  
SUITABILITY

## Weatherproof Thermoplastic Cover For Flanged Inlets and Flanged Receptacles

| Description   | Catalog Number |
|---|----------------|
| For use with 15 and 20A, 2 pole, 2 wire and 2 pole, 3 wire Insulgrip® flanged inlets and flanged receptacles below. | <b>WP1</b>     |

### Straight Blade, 2 pole, 3 wire Flanged Inlets



HBL5278C  
HBL5378C  
HBL5478C  
HBL5678C

### Flanged Receptacles



HBL5279C  
HBL5379C  
HBL5479C  
HBL5679C

### Twist-Lock®, 2 pole, 2 wire and 2 pole, 3 wire Flanged Inlets



HBL8815C  
HBL7524C  
HBL4716C  
HBL4586C  
HBL4786C

### Flanged Receptacles



HBL8809C  
HBL7526C  
HBL4715C  
HBL4585C  
HBL4785C



## Weatherproof Thermoplastic Cover For Flanged Inlets and Flanged Receptacles

| Description  | Catalog Number |
|--|----------------|
| For 20 and 30A, 3, 4, and 5 wire Insulgrip flanged inlets and flanged receptacles below. | <b>WP2</b>     |

### Twist-Lock®, 2 pole, 3 wire; 3 pole, 4 wire; 4 pole, 4 wire; 4 pole, 5 wire Flanged Inlets



HBL2315  
HBL2325  
HBL2335  
HBL2345  
HBL2355  
HBL2415  
HBL2425  
HBL2435

HBL2445  
HBL2455  
HBL2465  
HBL2515  
HBL2525  
HBL2535  
HBL2615  
HBL2625

HBL2635  
HBL2645  
HBL2655  
HBL2715  
HBL2725  
HBL2735  
HBL2745  
HBL2755

HBL2765  
HBL2775  
HBL2815  
HBL2825  
HBL2835  
HBL3325C  
HBL3334C  
HBL7408C

### Flanged Receptacles



HBL2316  
HBL2326  
HBL2336  
HBL2346  
HBL2356  
HBL2416  
HBL2426  
HBL2436

HBL2446  
HBL2456  
HBL2466  
HBL2516  
HBL2526  
HBL2536  
HBL2616  
HBL2626

HBL2636  
HBL2646  
HBL2656  
HBL2716  
HBL2726  
HBL2736  
HBL2746  
HBL2756

HBL2766  
HBL2776  
HBL2816  
HBL2826  
HBL2836  
HBL3326C  
HBL3335C  
HBL7409C



WP1



WP2

## Weatherproof Thermoplastic Cover For Flanged Inlets 50 Amp CS Series

| Description  | Catalog Number |
|--|----------------|
| For 50A, 2 pole, 3 wire and 3 pole, 4 wire flanged inlets below. | <b>HBL7780</b> |

### Twist-Lock®, 2 pole, 3 wire; 3 pole, 4 wire Flanged Inlets



CS6377  
CS8275  
CS8475

CS6375  
CS8375  
CS8175

HBL3777  
HBL3775  
HBL7958



HBL7780



**IP44**  
SUITABILITY

## Weatherproof Plates

| Description  | Catalog Number |
|--|----------------|
| Clear bubble plate, silicone rubber for use with all general purpose AC toggle and PresSwitch® Switches. Fits both FS/FD and standard boxes. | <b>HBL1795</b> |



**HBL1795**

## Weatherproof Plates

| Description   | Catalog Number    |
|---|-------------------|
| Gray neoprene PresSwitch® Plate. Fits FS/FD and standard boxes. | <b>HBL1750*</b>   |
| Same as above except yellow.                                    | <b>HBL17CM50*</b> |



**HBL1750**

Note: \*Not UL Listed.

## Weatherproof Plates

| Description   | Catalog Number    |
|---|-------------------|
| Gray neoprene PresSwitch® Plate with 125V red pilot light. Fits only FS/FD boxes. | <b>HBL1785*</b>   |
| Same as above except yellow.  | <b>HBL17CM85*</b> |



**HBL1785**

Note: \*Not UL Listed.

## Weatherproof Covers

| Description  | Catalog Number |
|--|----------------|
| Cast aluminum lift cover plate with fiber shield. For standard toggle and PresSwitch® Switches. Fits only FS/FD boxes. | <b>HBL7420</b> |



**HBL7420**

## Brass Locking Covers Attachment for Switches

| Description   | Catalog Number      |
|---|---------------------|
| Straight keying (all locks alike) appropriate for most applications. Straight cylinder type lock, each HBL96061 ordered operates on the same key—all locks are keyed alike.                       | <b>HBL96061*</b>    |
| Same as above except in dull chrome finish to match stainless steel plates.   | <b>HBL96061DCH*</b> |
| Straight keying (individual). Straight cylinder type lock, each HBL96062 ordered operates on a different key. All locks are keyed differently and individually. This type cannot be master keyed. | <b>HBL96062*</b>    |



**HBL96061**  
shown with wallplate and  
switch (sold separately)

Note: \*Not UL Listed.

## Locking Device

| Description                             | Catalog Number |
|---|----------------|
| Locking device for weatherproof covers. | <b>HBLWLC</b>  |



**HBLWLC**





**HBL5221**

## Duplex Covers For Vertical Mounting

| Description   | Dimensions             |                       | Catalog Number    |
|---|------------------------|-----------------------|-------------------|
|   | Height x Width x Depth |                       |                   |
| Thermoplastic, gray, for FS/FD box mounting.                                | 4.56" x 2.89" x 1.08"  | (115.8 x 73.4 x 27.4) | <b>HBL5221</b>    |
| Thermoplastic, yellow, for FS/FD box mounting.                              | 4.56" x 2.89" x 1.08"  | (115.8 x 73.4 x 27.4) | <b>HBL52CM21</b>  |
| Thermoplastic, white, for FS/FD box mounting.                               | 4.56" x 2.89" x 1.08"  | (115.8 x 73.4 x 27.4) | <b>HBL52CM21W</b> |
| Thermoplastic, gray, for device mounting.                                   | 4.56" x 2.89" x 1.08"  | (115.8 x 73.4 x 27.4) | <b>HBL5222</b>    |
| Thermoplastic, yellow, for device mounting.                                 | 4.56" x 2.89" x 1.08"  | (115.8 x 73.4 x 27.4) | <b>HBL52CM22</b>  |
| Die cast aluminum, gray, commercial grade, vertical position, device mount. | 4.56" x 2.81" x 0.75"  | (115.8 x 71.4 x 19.1) | <b>WP8V</b>       |



**WP8V**

## Duplex Covers For Horizontal Mounting

| Description   | Dimensions             |                       | Catalog Number   |
|---|------------------------|-----------------------|------------------|
|   | Height x Width x Depth |                       |                  |
| Cast aluminum, for device mounting.   | 2.88" x 4.56" x 0.79"  | (73.2 x 115.8 x 20.1) | <b>HBL5205WO</b> |
| Cast aluminum, for FS/FD box mounting.  | 2.88" x 4.56" x 0.79"  | (73.2 x 115.8 x 20.1) | <b>HBL5206WO</b> |
| Die cast aluminum, gray, commercial grade, horizontal position, device mount. | 2.90" x 4.60" x 0.75"  | (73.7 x 116.8 x 19.1) | <b>WP8H</b>      |



**HBL5206WO**



**WP8H**

## GFCI, Surge and Style Line® Covers

| Description   | Dimensions             |                       | Catalog Number |
|---|------------------------|-----------------------|----------------|
|   | Height x Width x Depth |                       |                |
| Die cast aluminum, gray, commercial grade, vertical position, device mount.   | 4.56" x 2.81" x 0.75"  | (115.8 x 71.4 x 19.1) | <b>WP26V</b>   |
| Die cast aluminum, gray, commercial grade, horizontal position, device mount. | 2.30" x 4.75" x 0.73"  | (58.4 x 120.7 x 18.5) | <b>WP26H</b>   |



**WP26V**



**WP26H**

## Toggle Cover

| Description                                  | Dimensions             |                       | Catalog Number |
|--|------------------------|-----------------------|----------------|
|  | Height x Width x Depth |                       |                |
| Thermoplastic, gray, for FS/FD box mounting. | 4.56" x 2.89" x 1.08"  | (115.8 x 73.4 x 27.4) | <b>HBL5201</b> |

*Note: All weatherproof plates are UL Listed for WET LOCATIONS WITH COVER CLOSED, for intermittent use in wet locations or use in damp locations. Those with Suffix "WO" are listed for WET LOCATIONS with cover open in continuous use. All plates are gasketed and self-closing.*

Dimensions in Inches (mm)



## 1-Gang Weatherproof Covers for Vertical Mounting

| Description  | Dimensions                                     |  | Catalog Number  |
|--|--|--|-----------------|
|  | Height x Width x Depth                         |  |                 |
| Zinc die cast, gray, duplex cover for box mounting.  | 4.58" x 2.82" x 0.57"<br>(116.3 x 71.6 x 14.5) |  | <b>RW51470</b>  |
| Zinc die cast, gray, 1.40 in. (35.6) cover for single receptacle or toggle switch for device mounting. | 4.56" x 2.81" x 0.88"<br>(115.8 x 71.4 x 22.4) |  | <b>RW51550*</b> |
| Zinc die cast, gray, GFCI, Surge and Style Line® cover for device mounting.                            | 4.58" x 2.81" x 0.57"<br>(116.3 x 71.4 x 14.5) |  | <b>RW51040</b>  |




## 1-Gang Weatherproof Covers for Horizontal Mounting

| Description  | Dimensions                                     |  | Catalog Number  |
|--|--|--|-----------------|
|  | Height x Width x Depth                         |  |                 |
| Zinc die cast, gray, duplex cover for device mounting.   | 2.82" x 4.57" x 0.79"<br>(71.6 x 116.1 x 20.1) |  | <b>RW51810</b>  |
| Zinc die cast, gray, 1.40 in. (35.6) cover for single receptacle or toggle switch for device mounting. | 2.81" x 4.56" x 0.99"<br>(71.4 x 115.8 x 25.1) |  | <b>RW51520*</b> |
| Zinc die cast, gray, GFCI, Surge and Style Line® cover for device mounting.                            | 2.82" x 4.56" x 0.52"<br>(71.6 x 115.8 x 13.2) |  | <b>RW51020</b>  |



## 2-Gang Weatherproof Covers for Vertical Mounting

| Description  | Dimensions                                      |  | Catalog Number |
|--|---|--|----------------|
|  | Height x Width x Depth                          |  |                |
| Zinc die cast, gray, duplex cover for device mounting.   | 4.54" x 4.54" x 0.75"<br>(115.3 x 115.3 x 19.1) |  | <b>RW51320</b> |
| Zinc die cast, gray, one duplex/one GFCI, Surge and Style Line® cover for box mounting.                | 4.54" x 4.54" x 0.77"<br>(115.3 x 115.3 x 19.6) |  | <b>RW51330</b> |
| Zinc die cast, gray, 1.40 in. (35.6) cover for single receptacle or toggle switch for device mounting. | 4.54" x 4.54" x 0.77"<br>(115.3 x 115.3 x 19.6) |  | <b>RW51380</b> |
| Zinc die cast, gray, two GFCI, Surge and Style Line® cover for box mounting.                           | 4.54" x 4.56" x 0.73"<br>(115.3 x 115.8 x 18.5) |  | <b>RW51450</b> |

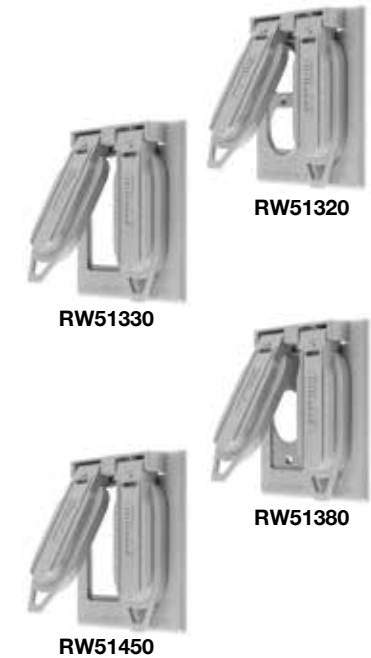

Note: All weatherproof plates are UL Listed for WET LOCATIONS WITH COVER CLOSED, for intermittent use in wet locations or use in damp locations. All plates are gasketed and self-closing.  
\*cULus Listed.

Dimensions in Inches (mm)



## Features and Benefits

### Weatherproof Metallic While-In-Use Covers

The NEMA 3R Rated EXTRA DUTY® Metallic and Non-metallic While-in-Use Covers offer weather protection for outlets when they are in use.

- Patented keyhole mounting system allows installation in under a minute
- Pre-configured for GFCI with patented technology for alternate devices
- Lockable tab for OSHA compliance
- Sealed-in-place gasket
- Premium powder coat
- External cord retention chamber
- Each box contains three or six plates to make a variety of configurations (8 or 55)




### Metallic EXTRA DUTY® While-In-Use Covers

| Description  | Dimensions                                     |                                   | Catalog Number |
|--|--|-----------------------------------|----------------|
|  | Height x Width x Depth                         |                                   |                |
| Heavy duty die-cast aluminum 1-Gang box with gray lid for vertical mounting offers superior commercial quality 8-in-1 configurations | 6.12" X 3.37" X 3.5"<br>(155.4 X 85.6 X 89.0)  | <b>1.8</b><br>Product Variations  | <b>WP26E</b>   |
| Heavy duty die-cast metal 1-gang box with gray lid for horizontal mounting; 8-in-1 configurations                                    | 4.37" X 5.12" X 3.5"<br>111.0 X 130.0 X 89.0)  | <b>1.8</b><br>Product Variations  | <b>WP26EH</b>  |
| Heavy duty die-cast metal 2-gang box with gray lid for vertical mounting; 55-in-1 configurations                                     | 6.12" X 5.12" X 3.5"<br>(155.4 X 130.0 X 89.0) | <b>1.55</b><br>Product Variations | <b>WP262E</b>  |


**1.8**  
Product Variations

1 Box {3 Adapters}

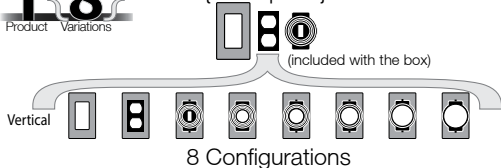


**1.8**  
Product Variations

1 Box {3 Adapters}

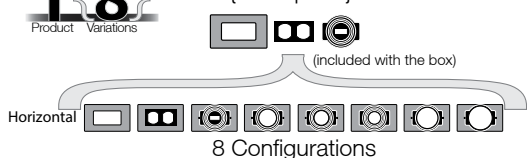


**1.55**  
Product Variations

1 Box {6 Adapters}

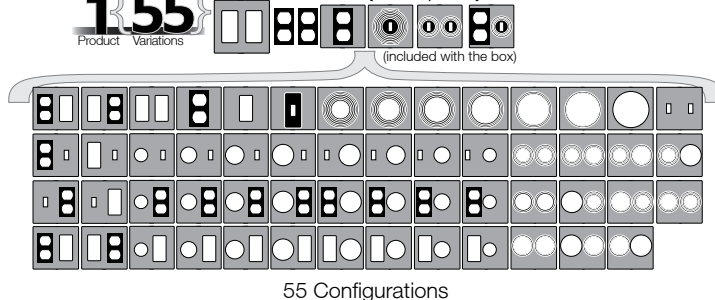

### Metallic Cover Dimensions - inches (mm)

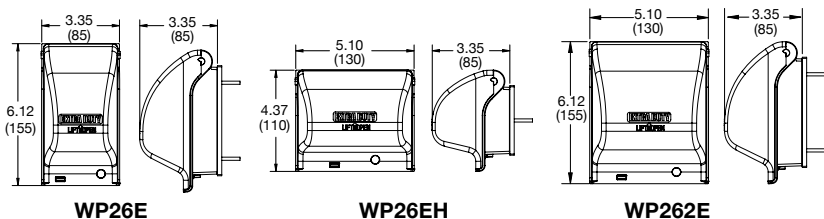

Dimensions in Inches (mm)

## Features and Benefits

### Weatherproof Non-Metallic While-In-Use Covers


The NEMA 3R Rated EXTRA DUTY® Metallic and Non-metallic While-in-Use Covers offer weather protection for outlets when they are in use.

- Patented keyhole mounting system allows installation in under a minute
- Pre-configured for GFCI with patented technology for alternate devices
- Lockable tab for OSHA compliance
- Sealed-in-place gasket
- High-impact polycarbonate construction provides maximum durability
- Each box contains three or six plates to make a variety of configurations (16 or 55)




### Non-Metallic While-In-Use Covers

| Description  | Dimensions<br>Height x Width x Depth             | Product Variations |                |
|--|--|--------------------|----------------|
|  |  | Standard           | EXTRA DUTY®    |
| Standard 1-gang box with clear tinted cover, for horizontal or vertical mounting; 16-in-1 configurations   | 5.90" X 4.18" X 2.75"<br>(149.8 X 106.1 X 69.9)  | <b>RW57300</b>     | <b>RW58300</b> |
| Extra deep 1-gang box with clear tinted cover, for horizontal or vertical mounting; 16-in-1 configurations | 5.92" X 4.20" X 4.75"<br>(150.4 X 106.7 X 120.7) | <b>RW57350</b>     | <b>RW58350</b> |
| Standard 2-gang box, clear tinted cover, for horizontal or vertical mounting; 55-in-1 configurations       | 5.54" X 5.43" X 2.75"<br>(140.7 X 138.0 X 69.9)  | <b>RW57750</b>     | <b>RW58750</b> |

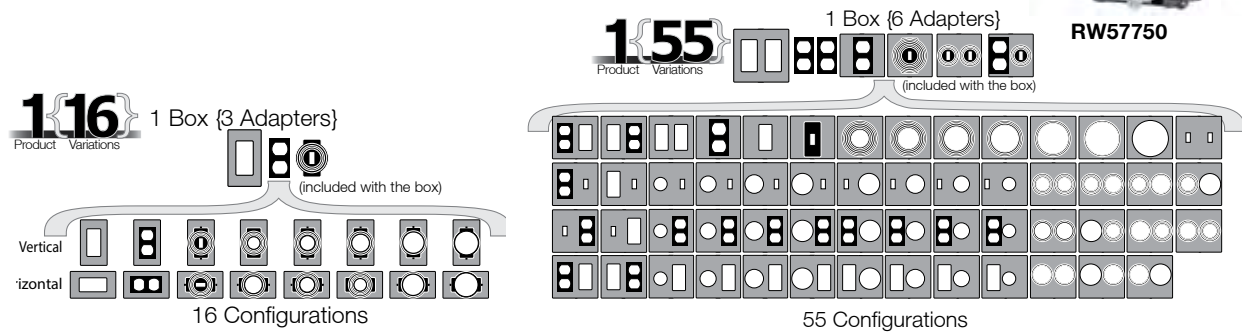

### Non-Metallic Cover Dimensions - inches (mm)

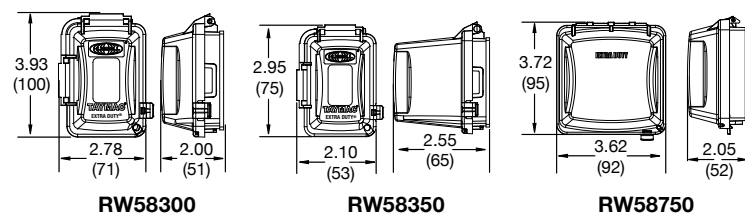

Dimensions in Inches (mm)



## Screws, 6-32 Thread, 100 Count



**RA38IPK100**

| Description  | Color/Material  | Catalog Number     |
|--|-----------------|--------------------|
| Decorator Wallplate Screws,<br>Oval Head Milled Slot,<br>3/8 in. Long – 6-32 Thread,<br>100 per Box (Order 1 to<br>receive a box of 100) | Almond          | <b>RA38ALPK100</b> |
|  | Black           | <b>RA38BKPK100</b> |
|  | Brown           | <b>RA38PK100</b>   |
|  | Gray            | <b>RA38GYPK100</b> |
|  | Ivory           | <b>RA38IPK100</b>  |
|  | Light Almond    | <b>RA38LAPK100</b> |
|  | White           | <b>RA38WPK100</b>  |
|  | Stainless Steel | <b>RA38SSPK100</b> |



**RA12IPK100**

| Description   | Color/Material | Catalog Number     |
|---|----------------|--------------------|
| Standard Wallplate Screws,<br>Oval Head Milled Slot,<br>1/2 in. Long – 6-32 Thread,<br>100 per Box (Order 1 to<br>receive a box of 100) | Almond         | <b>RA12ALPK100</b> |
|   | Black          | <b>RA12BKPK100</b> |
|   | Brown          | <b>RA12PK100</b>   |
|   | Gray           | <b>RA12GYPK100</b> |
|   | Ivory          | <b>RA12IPK100</b>  |
|   | Light Almond   | <b>RA12LAPK100</b> |
|   | White          | <b>RA12WPK100</b>  |



**RA58SSPK100**

| Description   | Color/Material  | Catalog Number     |
|---|-----------------|--------------------|
| Standard Wallplate Screws,<br>Oval Head Milled Slot,<br>5/8 in. Long – 6-32 Thread,<br>100 per Box (Order 1 to<br>receive a box of 100) | Ivory           | -                  |
|   | White           | -                  |
|   | Stainless Steel | <b>RA58SSPK100</b> |



**RA88IPK100**

| Description   | Color/Material  | Catalog Number     |
|---|-----------------|--------------------|
| Standard Wallplate Screws,<br>Oval Head Milled Slot,<br>1.0 in. Long – 6-32 Thread,<br>100 per Box (Order 1 to<br>receive a box of 100) | Ivory           | <b>RA88IPK100</b>  |
|   | White           | <b>RA88WPK100</b>  |
|   | Stainless Steel | <b>RA88SSPK100</b> |



**RA756I**

**RA40**

## Single Count Screws and Accessories

| Description   | Color        | Catalog Number |
|---|--------------|----------------|
| Blank adapter, to fill a toggle opening.                                | Brown        | <b>RA756</b>   |
|   | Ivory        | <b>RA756I</b>  |
|   | White        | <b>RA756W</b>  |
| Blank adapter, to fill a decorator opening.                             | Ivory        | <b>NS620I</b>  |
|   | Light Almond | <b>NS620LA</b> |
|   | White        | <b>NS620W</b>  |
| Blank adapter, .406" (10.30) dia. hole,<br>to fill a decorator opening. | Ivory        | <b>NS621I</b>  |
|   | Light Almond | <b>NS621LA</b> |
|   | White        | <b>NS621W</b>  |
| Mounting strap, with screws.  | Steel        | <b>RA40</b>    |
| Brass plated screw, standard slot, .38 in. (9.7) long.                  | Brass        | <b>HBL7341</b> |



**NS620I**

**NS621I**




**HBL7341**


Dimensions in Inches (mm)




## Product Dimensions



| Size   | Standard Nylon |                | Mid-Size Nylon |               | Jumbo-Size Nylon |               |
|--------|----------------|----------------|----------------|---------------|------------------|---------------|
|        | Height         | Width          | Height         | Width         | Height           | Width         |
| 1-Gang | 4.63" (117.6)  | 2.88" (73.2)   | 4.88" (124.0)  | 3.13" (79.5)  | 5.25" (133.4)    | 3.50" (88.9)  |
| 2-Gang | 4.63" (117.6)  | 4.69" (119.1)  | 4.88" (124.0)  | 4.94" (125.4) | 5.25" (133.4)    | 5.31" (134.9) |
| 3-Gang | 4.63" (117.6)  | 6.50" (165.1)  | 4.88" (124.0)  | 6.75" (171.5) |                  |               |
| 4-Gang | 4.63" (117.6)  | 8.31" (211.1)  | 4.88" (124.0)  | 8.56" (217.4) |                  |               |
| 5-Gang | 4.63" (117.6)  | 10.12" (256.1) |                |               |                  |               |
| 6-Gang | 4.63" (117.6)  | 11.93" (303.0) |                |               |                  |               |



| Size   | Snap-On Nylon (RCW Series) |                | Snap-On Nylon (NPS Series) |               |            |
|--------|----------------------------|----------------|----------------------------|---------------|------------|
|        | Height                     | Width          | Height                     | Width         | Depth      |
| 1-Gang | 4.68" (118.9)              | 2.94" (74.7)   | 4.75" (120.6)              | 3.00" (76.2)  | .25" (6.2) |
| 2-Gang | 4.68" (118.9)              | 4.75" (120.7)  | 4.75" (120.6)              | 4.81" (122.2) | .25" (6.2) |
| 3-Gang | 4.68" (118.9)              | 6.56" (166.6)  | 4.75" (120.6)              | 6.62" (168.2) | .25" (6.2) |
| 4-Gang | 4.68" (118.9)              | 8.37" (212.6)  | 4.75" (120.6)              | 8.44" (214.3) | .25" (6.2) |
| 5-Gang | 4.68" (118.9)              | 10.18" (258.6) |                            |               |            |
| 6-Gang | 4.68" (118.9)              | 11.99" (304.5) |                            |               |            |




| Size   | Standard Metal |                | Painted Metal |                | Jumbo Metal   |               |
|--------|----------------|----------------|---------------|----------------|---------------|---------------|
|        | Height         | Width          | Height        | Width          | Height        | Width         |
| 1-Gang | 4.50" (114.3)  | 2.87" (72.9)   | 4.50" (114.3) | 2.75" (69.8)   | 5.25" (133.4) | 3.50" (88.9)  |
| 2-Gang | 4.50" (114.3)  | 4.60" (116.8)  | 4.50" (114.3) | 4.56" (115.8)  | 5.25" (133.4) | 5.31" (134.9) |
| 3-Gang | 4.50" (114.3)  | 6.41" (162.8)  | 4.50" (114.3) | 6.38" (162.1)  |               |               |
| 4-Gang | 4.50" (114.3)  | 8.22" (208.8)  | 4.50" (114.3) | 8.18" (207.8)  |               |               |
| 5-Gang | 4.50" (114.3)  | 10.03" (254.8) | 4.50" (114.3) | 10.00" (254.0) |               |               |
| 6-Gang | 4.50" (114.3)  | 11.81" (300.0) | 4.50" (114.3) | 11.81" (300.0) |               |               |
| 7-Gang | 4.50" (114.3)  | 13.68" (347.5) |               |                |               |               |
| 8-Gang | 4.50" (114.3)  | 15.44" (392.1) |               |                |               |               |

## Wallplate Openings and Mounting Dimensions

#6-32 Oval Head Screws Typical

Standard Metal - 1.39" (35.3)  
 Painted Metal - 1.37" (34.8)  
 Jumbo Metal - 1.76" (44.7)  
 Standard Nylon - 1.44" (36.6)  
 Mid-Size Nylon - 1.56" (39.6)

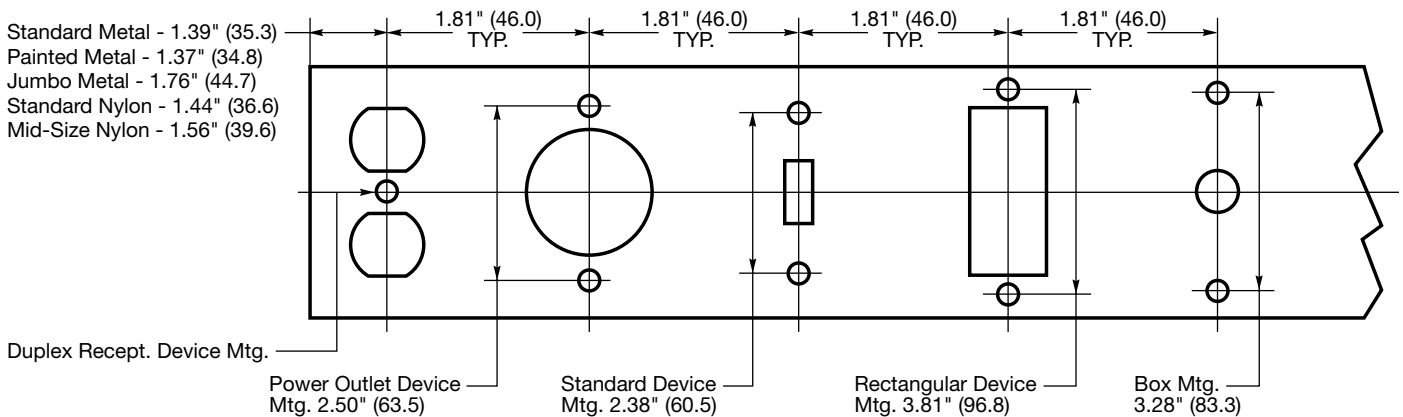

Note: Specifications are subject to change without notice.

Dimensions in Inches (mm)



## Custom Metal Wallplates

How To Select A Custom Metal Wallplate

### Step 1:

Determine wallplate material and enter in box marked "Catalog Number"

Determine number of gangs required and enter in box marked "Catalog Number" next to material.

| Smooth Metal Material   | Code |
|-------------------------|------|
| Anodized Aluminum       | AL   |
| Brass plated steel      | BP   |
| Solid brass             | BR   |
| Chrome plated steel     | CH   |
| Stainless steel 302/304 | SS   |

| Number of Gangs | Code |
|-----------------|------|
| 1-gang          | 1    |
| 2-gang          | 2    |
| 3-gang          | 3    |
| 4-gang          | 4    |
| 5-gang          | 5    |
| 6-gang          | 6    |
| 7-gang          | 7    |
| 8-gang          | 8    |

Enter Catalog Number

◆ WC\* SS 4

### Step 2:

Enter quantity.

### Step 3:

Select the custom metal wallplate configuration.


Refer to the custom wallplate configuration chart to select a configuration for each gang in the wallplate. Each configuration has a specific 3-digit code located in the right hand side of the chart on pages N-33 to N-36. Enter this 3-digit configuration code in the corresponding box on the order form grid to match the position required on the finished custom wallplate.

| Item No. | Catalog Number | Quantity | Code | Position 1 | Position 2 | Position 3 | Position 4 |
|----------|----------------|----------|------|------------|------------|------------|------------|
| 1        | WCSS4          |          | H*   | 001        | 149        | 008        | 026        |
| 2        |                |          |      |            |            |            |            |

Note: \*WC and H are preprinted on the distributor order form.

◆ Number to use for pricing.

The 3-digit numbers listed at the upper right of the Sample Order Form (001, 149, etc.) represent the custom metal wallplate selected on the right. See Configuration Chart and Hubbell Configuration Selector Guide on pages N-33 to N-36 for additional configuration choices.

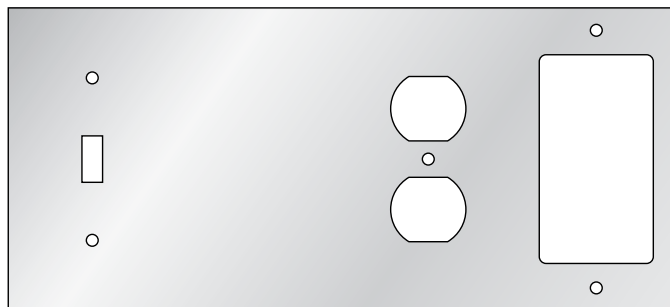





## Configuration Chart


|  |   |  |   |                           |   |
|--|---|--|---|---------------------------|---|
|  | <b>001</b><br>Switch.   |  | <b>079</b><br>Barrel Key Switch with hash marks.                            |                           | <b>456</b><br>.375" (9.5) Dia.<br>Round Box Mounted.                        |
|  | <b>007</b><br>Single Receptacle.<br>1.40" ID (35.6) Hole.   |  | <b>080</b><br>Barrel Key Switch with On/Off and hash marks.                 |                           | <b>458</b><br>.500" (12.7) Dia.<br>Round Box Mounted.                       |
|  | <b>008</b><br>Duplex Receptacle.  |  | <b>091</b><br>Single Receptacle.<br>1.60" ID<br>(40.5) Hole.                |                           | <b>411</b><br>.635" (16.1) Dia.<br>Round Box Mounted.                       |
|  | <b>011</b><br>1-gang .635" ID (16.1)<br>Hole Box Mounted with<br>.50" ID (12.7) Nylon Bushing.            |  | <b>098</b><br>Single Receptacle.<br>2.16" ID<br>(54.7) Hole.                |                           | <b>435</b><br>9-Pin Vertical Box Mounted.                                   |
|  | <b>012</b><br>1-gang .635" ID (16.1) Hole Strap<br>Mtd. incl. Strap with .50" ID (12.7)<br>Nylon Bushing. |  | <b>135</b><br>Vertical Mounted Louver.                                      |                           | <b>438</b><br>15-Pin Vertical Box Mounted.                                  |
|  | <b>013</b><br>Blank Box Mounted.  |  | <b>149</b><br>Totally Blank<br>(no mounting holes).                         |                           | <b>295</b><br>25-Pin Vertical Box Mounted.                                  |
|  | <b>014</b><br>Blank Strap Mounted<br>incl. Strap.   | <b>Coax/Twinax and Modular<br/>Jack Openings</b> |   |                           | <b>314</b><br>IBM® Type Opening Box<br>Mounted.                             |
|  | <b>026</b><br>Rectangular Opening.  |  | <b>422</b><br>.51" (12.8) Dia.<br>"D" Box Mounted.<br>.44" (11.1) Flat Dia. |                           | <b>415</b><br>IBM® Type Opening with<br>One .586" x .762"<br>(14.9 x 19.3). |
|  | <b>055</b><br>1-gang .375" ID (9.5) Hole<br>Strap Mounted incl. Strap.                                    |  | <b>425</b><br>.51" (12.8) Dia.<br>"D" Box Mounted.<br>.47" (12) Flat Dia.   | <b>Voice/Data Opening</b> |   |
|  | <b>056</b><br>1-gang .375" ID (9.5) Hole<br>Box Mounted.  |  | <b>428</b><br>.58" (14.7) Dia.<br>"D" Box Mounted.<br>.55" (14) Flat Dia.   |                           | <b>470</b><br>.542" x .750" (13.8 x 19.0)<br>Vertical Box Mounted.          |
|  | <b>057</b><br>1-gang .50" ID (12.7) Hole<br>Strap Mounted incl. Strap.                                    |  | <b>430</b><br>.76" (19.2) Dia.<br>"D" Box Mounted.<br>.73" (18.6) Flat Dia. |                           | <b>473</b><br>.586" x .762" (14.9 x 19.4)<br>Vertical Box Mounted.          |
|  | <b>058</b><br>1-gang .50" ID<br>(12.7) Hole Box Mounted.  |  | <b>431</b><br>.76" (19.2) Dia.<br>"D" Box Mounted.<br>.73" (18.6) Flat Dia. |                           | <b>477</b><br>.586" x .815" (14.9 x 20.7)<br>Vertical Box Mounted.          |
|  | <b>078</b><br>Barrel Key Switch.  |  | <b>435</b><br>.76" (19.2) Dia.<br>"D" Box Mounted.<br>.73" (18.6) Flat Dia. |                           | <b>480</b><br>.575" x .783" (14.6 x 19.9)<br>Vertical Box Mounted.          |

Note: For detailed dimensions of the above configurations, see pages N-34 to N-36. Available in smooth metal, standard size only up to and including 8-gang type.

IBM® is a registered trademark of International Business Machines Corporation.




## Configuration Chart (Continued)




**Configuration 001**

Toggle Switch Plate.




**Configuration 026**

GFI/Rectangular Opening.




**Configuration 007**

Single 15 or 20A Straight Blade Receptacle.  
15A Twist-Lock® Receptacle.




**Configuration 055**

Single, .375" (9.5) Telephone (Strap Mount).




**Configuration 008**

Duplex Receptacle.




**Configuration 056**

Single, .375" (9.5) Telephone (Box Mount).




**Configuration 011**

Single, .635" (16.1) Telephone (Box Mount).




**Configuration 057**

Single, .50" (12.7) Telephone (Strap Mount).




**Configuration 012**

Single, .635" (16.1) Telephone (Strap Mount).




**Configuration 058**

Single, .50" (12.7) Telephone (Box Mount).




**Configuration 013**

Blank Plate (Box Mount).




**Configuration 078**

Barrel Key Switch.



**Configuration 014**

Blank Plate (Strap Mount).



**Configuration 079**

Barrel Key Switch with hash marks.

Note: Specifications are subject to change without notice.




## Configuration Chart (Continued)

|  |  |  |  |
|--|--|--|--|
|  | <p><b>Configuration 080</b></p> <p>Barrel Key Switch with On/Off and hash marks.</p>                     |  | <p><b>Configuration 411</b></p> <p>Dual .635" (16.1) Holes (Box Mount).</p>    |
|  | <p><b>Configuration 091</b></p> <p>Single 20 or 30A Twist-Lock® Receptacle.</p>                          |  | <p><b>Configuration 415</b></p> <p>IBM® Type and Modular Jack (Box Mount).</p> |
|  | <p><b>Configuration 098</b></p> <p>Single Receptacle, 30 or 50A Straight Blade, 3 Wire Power Outlet.</p> |  | <p><b>Configuration 422</b></p> <p>Single .505" (12.8) D-Hole (Box Mount).</p> |
|  | <p><b>Configuration 135</b></p> <p>Louvered Plate (Strap Mount).</p>                                     |  | <p><b>Configuration 423</b></p> <p>Dual .505" (12.8) D-Holes (Box Mount).</p>  |
|  | <p><b>Configuration 149</b></p> <p>Totally Blank Plate.</p>  |  | <p><b>Configuration 425</b></p> <p>Single .505" (12.8) D-Hole (Box Mount).</p> |
|  | <p><b>Configuration 295</b></p> <p>RS232 Port Single 25-Pin (Box Mount).</p>                             |  | <p><b>Configuration 426</b></p> <p>Dual .505" (12.8) D-Holes (Box Mount).</p>  |
|  | <p><b>Configuration 314</b></p> <p>IBM® Type (Box Mount).</p>  |  | <p><b>Configuration 428</b></p> <p>Single .580" (14.7) D-Hole (Box Mount).</p> |

Note: Specifications are subject to change without notice.  
IBM® is a registered trademark of International Business Machines Corporation.




## Configuration Chart (Continued)

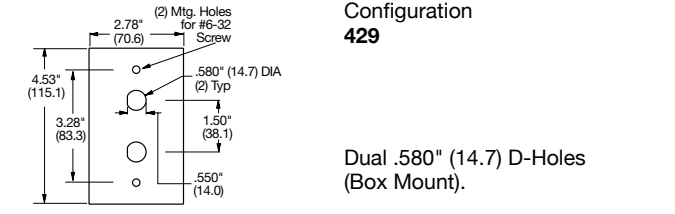


Configuration  
**429**

Dual .580" (14.7) D-Holes  
(Box Mount).

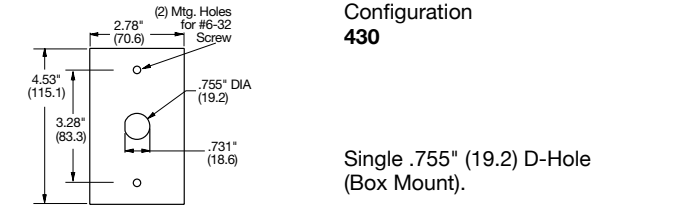


Configuration  
**430**

Single .755" (19.2) D-Hole  
(Box Mount).

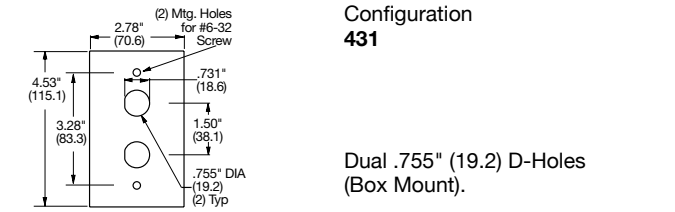


Configuration  
**431**

Dual .755" (19.2) D-Holes  
(Box Mount).

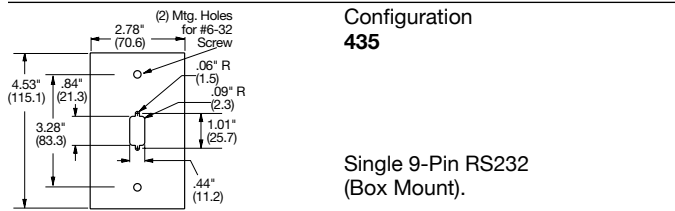


Configuration  
**435**

Single 9-Pin RS232  
(Box Mount).

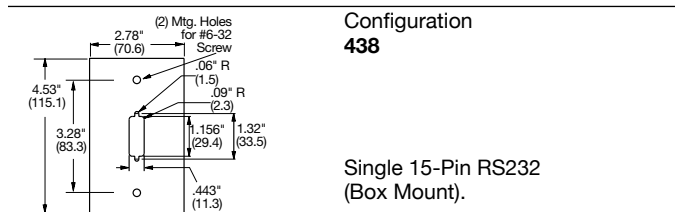


Configuration  
**438**

Single 15-Pin RS232  
(Box Mount).

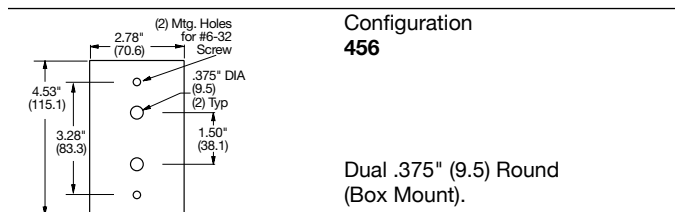


Configuration  
**456**

Dual .375" (9.5) Round  
(Box Mount).

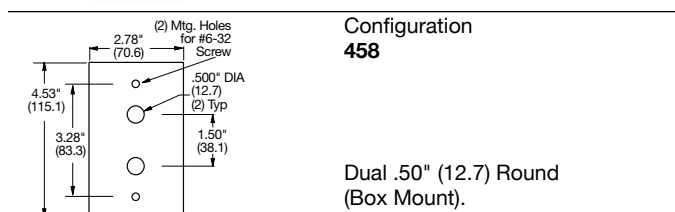


Configuration  
**458**

Dual .50" (12.7) Round  
(Box Mount).

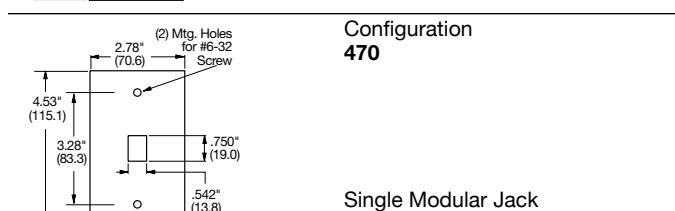


Configuration  
**470**

Single Modular Jack  
(Box Mount).

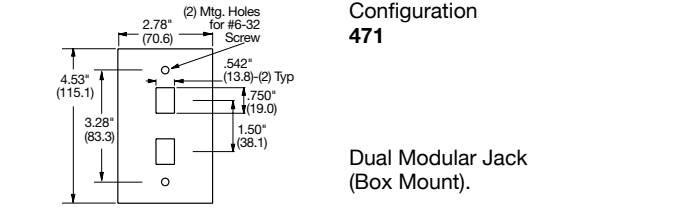


Configuration  
**471**

Dual Modular Jack  
(Box Mount).

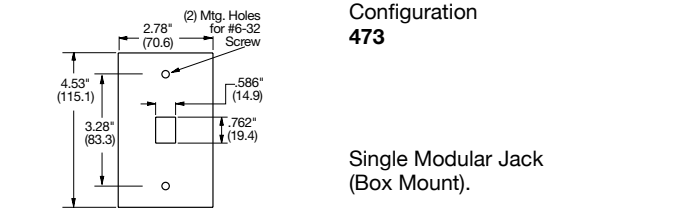


Configuration  
**473**

Single Modular Jack  
(Box Mount).

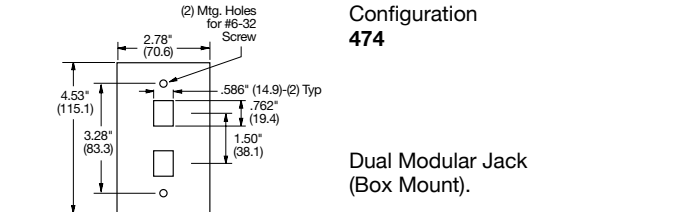


Configuration  
**474**

Dual Modular Jack  
(Box Mount).

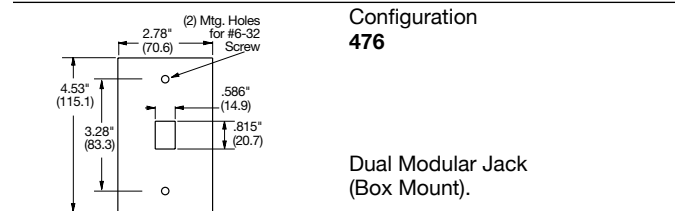


Configuration  
**476**

Dual Modular Jack  
(Box Mount).

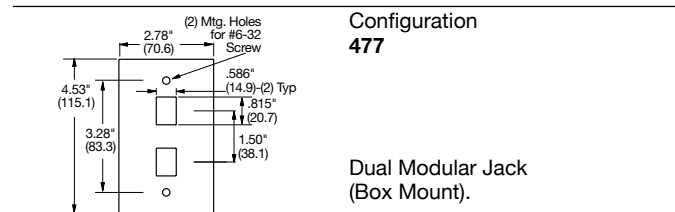


Configuration  
**477**

Dual Modular Jack  
(Box Mount).

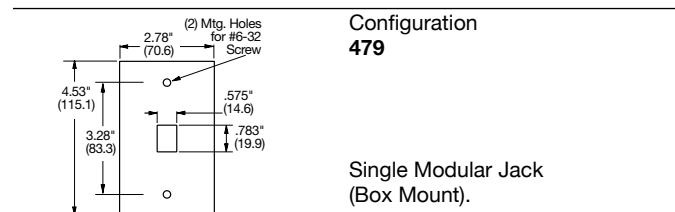

Configuration  
**479**

Single Modular Jack  
(Box Mount).

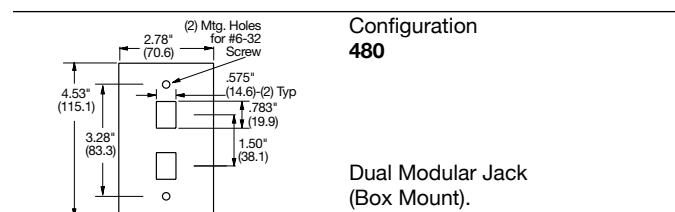

Configuration  
**480**

Dual Modular Jack  
(Box Mount).

Note: Specifications are subject to change without notice.